


T-16A
CAVITY

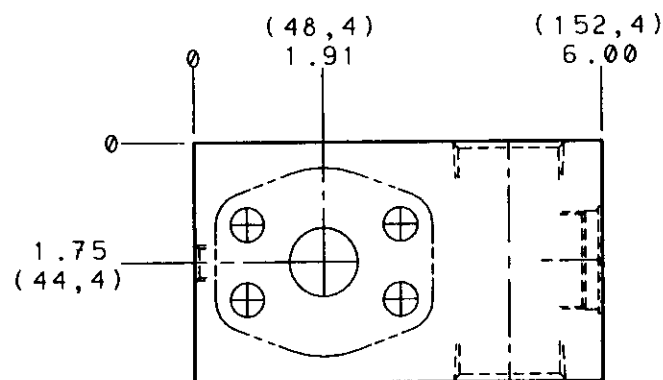


W4A


NOTES

REFER TO SUN HYDRAULICS' TECHNICAL LITERATURE & CATALOGUE FOR DETAILS OF CARTRIDGE STANDARD SETTINGS, ADJUSTMENT RANGES, MAXIMUM PRESSURE RATINGS, SEAL MATERIAL, TORQUE VALUES, ETC.

.25-18 NPTF
GAUGE PORT

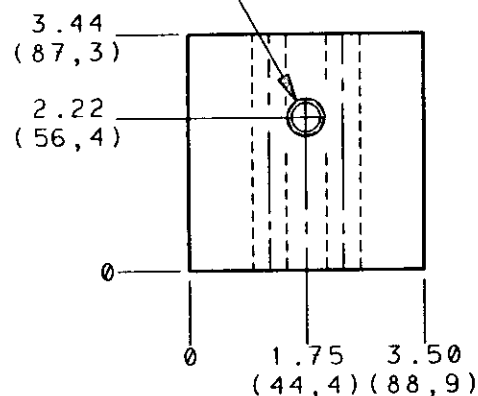


1.00" SAE CODE-62
4-BOLT FLANGE PATTERN.
TYP (2) PLACES.
MOUNTING HOLES =
.47 (11,9) DIA THRO.
TYP (4) PLACES.

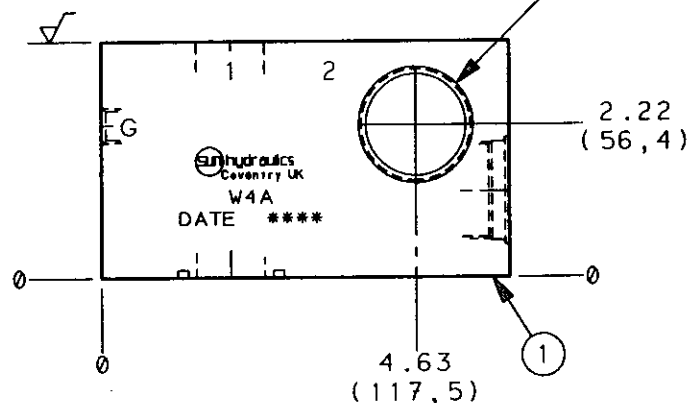


1.25-11.5 NPTF PORT
TYP (2) PLACES

T-16A CAVITY
.06 (1,6) L.S.DEPTH

NOTE. CONNECTION INTO
CAVITY #1 PORT AREA IS
RESTRICTED TO :-
3x .39 (10.0) DIA HOLES.
EQUIVALENT TO APPROX.
1x .68 (17.3) DIA HOLE.

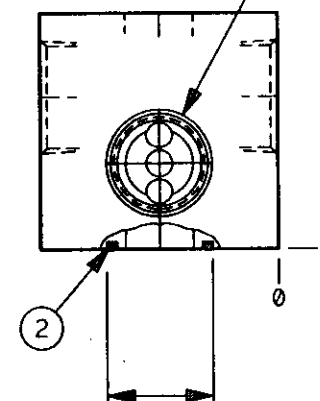

1.56 (39,7) O/DIA
O-RING GROOVE
REF ONLY

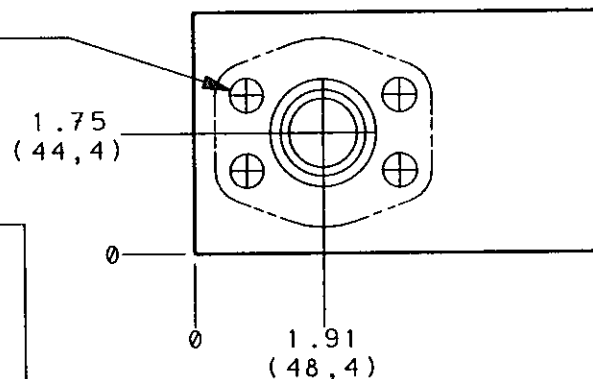

2	500-001-219	O-RING SEAL	1
1	158-749-001	BODY	1
ITEM	PART NO.	PART NAME	QTY

OUTLINE & ASS'Y		E M		PART NO.		PART NAME		Y	
UNLESS OTHERWISE SPECIFIED		TITLE T-16A CAVITY SANDWICH MOUNT 1" SAE CODE-62 FLANGE MOUNTING THROUGH PORTED BODY				REVISION		PART NO.	
DIMENSION TOL (INCHES)		CADD SCALE		REF. INITIAL ENQUIRY		MATERIAL		W4A	
.X = .030 .XX = .015 .XXX = .005		1:2		EQ1 01326		ALUMINIUM			
ANGLE TOL 1/2°		DRAWN J. Madden		CHECK DRC		RELEASE		HEAT TREAT & FINISH	
FINISH 88 ✓ REMOVE ALL BURRS		DATE 09 NOV 99		DATE 17 NOV 99		DATE		 SUN hydraulics LIMITED WIELER ROAD, WHITLEY, COVENTRY, CV3 4LA ENGLAND TELEPHONE (01203) 307696	