


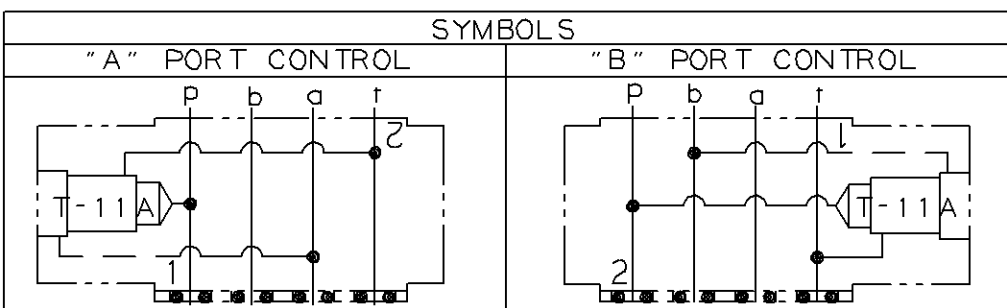

NOTES :


- 1) SEALS - BUNA N
- 2) ALUMINUM BODIES - 3000 PSI MAX. CONTINUOUS SERVICE PRESSURE.
- 3) SEE CATALOG FOR OTHER OPTIONS.
- *4) CUSTOMER TO INSTALL LOCATING PIN (ITEM 5) FOR FUNCTIONAL ORIENTATION DESIRED.

REVISION

B

PART NO.




WBA

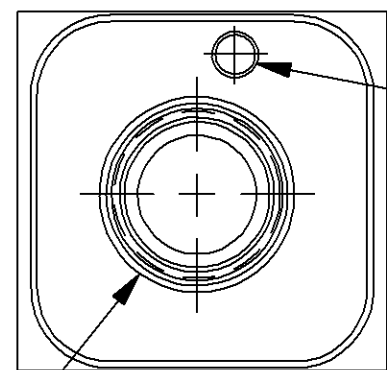


T-11A CAVITY
.69 L.S. DEPTH

1.52
1.48

.27
.23
0

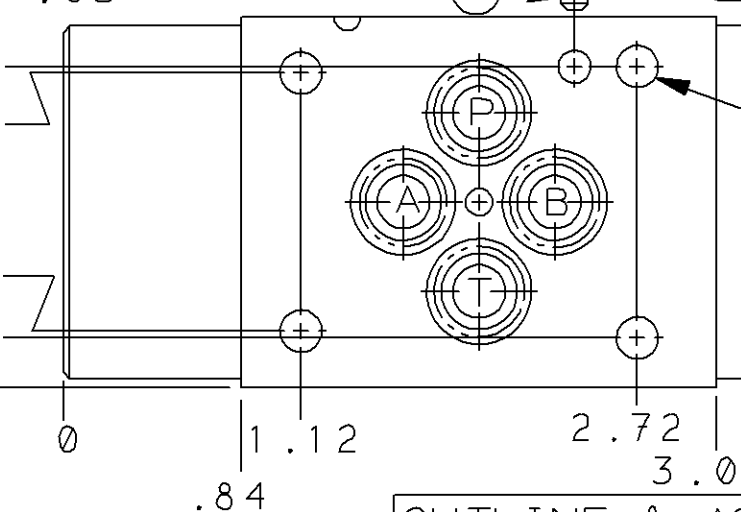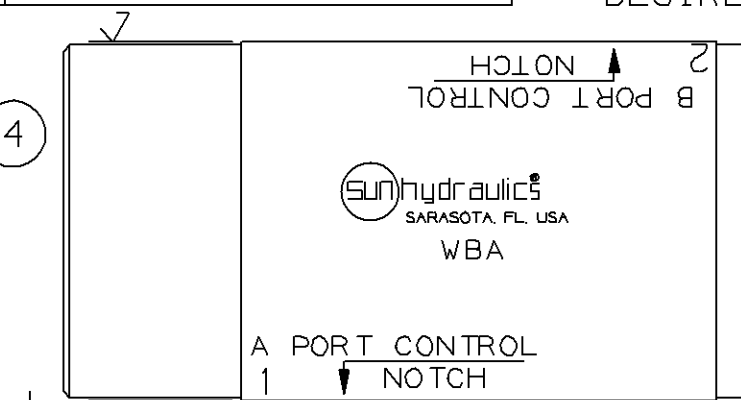

OUTLINE & ASSEM.

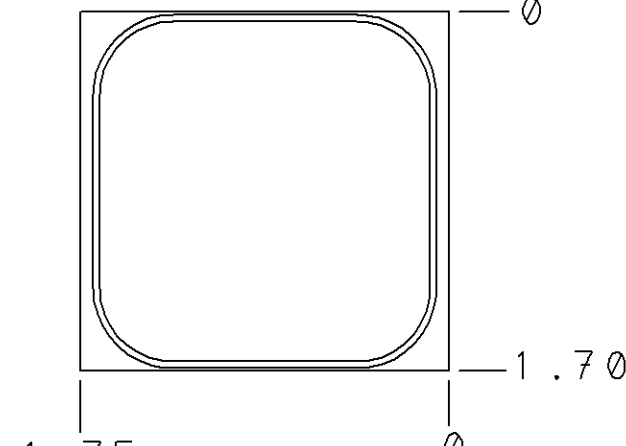

.20 DIA MTG HOLE
TYP (4) PLACES

ITEM	PART NO.	PART NAME	QTY
5	811-001-006	PIN	1
4	850-004-218	PLUG	1
3	500-001-012	O RINGS	4
2	700-002	PLATE	1
1	152-879	BODY	1

LET	REVISION	DATE	DRN	CHK	REL
B	.84 WAS .80, 3.09 WAS 3.05 1.12 WAS 1.08, 2.72 WAS 2.67	09AUG95	DAS		6725
A	REVISED STAMPING & ADDED ITEM 5.	02NOV92	BRS		4080

UNLESS OTHERWISE SPECIFIED
DIMENSION TOL
.x = ±.030
.xx = ±.015
.xxx = ±.005
ANGLE TOL ± 1/2°
FINISH 80✓
REMOVE ALL BURRS

TITLE ISO 03 SANDWICH-T-11A CAV.
P-TO-T w/ CONTROL FROM A OR B
SCALE 1 = 1
DRAWN DAS
CHECK
RELEASE 3826
DATE 7-7-92
DATE
DATE 7-8-92

REVISION B PART NO. WBA

MATERIAL ALUM. & NOTED
HEAT TREAT & FINISH

SUN hydraulics CORPORATION
701 TALLEVAST ROAD
SARASOTA, FLORIDA 34243, USA
TELEPHONE (941) 362-1300