



SYMBOL






REVISION	PART NO.
B	WBT

NOTES:

- 1) ALUMINUM BODIES: 3000 PSI MAXIMUM CONTINUOUS SERVICE PRESSURE
- 2) FOR OTHER OPTIONS, SEE OPTIONS SHEET.

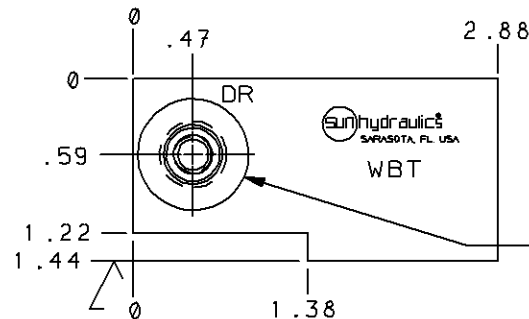

.250-19 BSPP EXTERNAL DRAIN PORT-PLUG INTERNAL .062-27 NPTF PORT BEFORE INSTALLING CARTRIDGE INTO T-11A CAVITY.
OPTIONAL-FOR INTERNAL DRAIN TO #3 PORT-LEAVE INTERNAL .062-27 NPTF PORT UNPLUGGED AND PLUG EXTERNAL DRAIN PORT

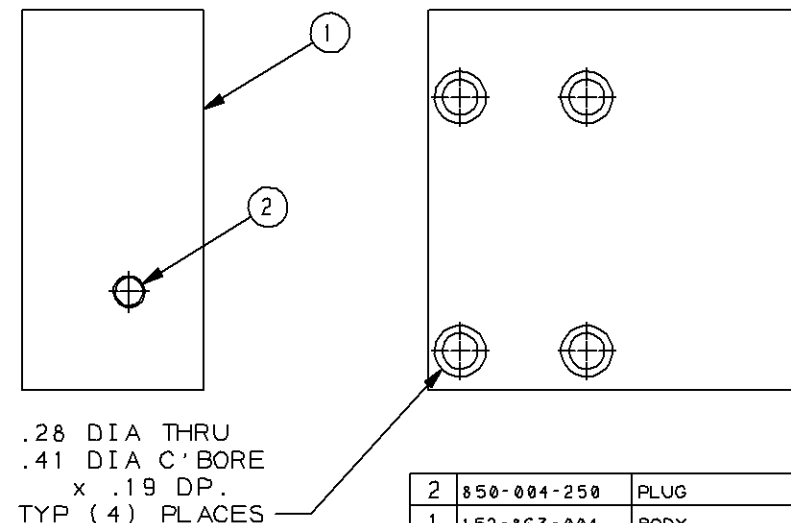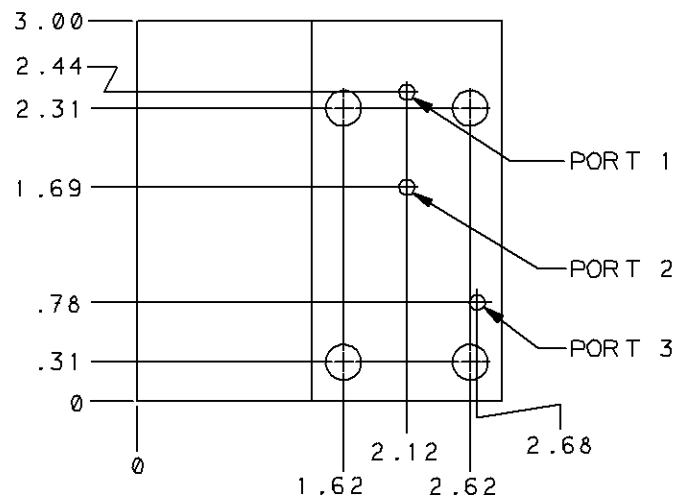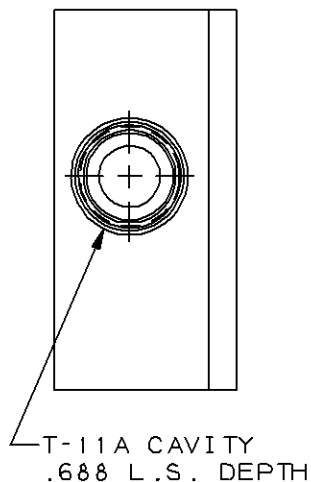

ITEM	PART NO.	PART NAME	QTY
2	850-004-250	PLUG	1
1	152-863-004	BODY	1

OUTLINE				REVISION	PART NO.
TITLE DIRECT-MOUNTED T-11A CAV. w/EXTERNAL DRAIN PORT				B	WBT
UNLESS OTHERWISE SPECIFIED		SCALE REF.		MATERIAL	
DIMENSION TOL		1:1		ALUMINUM	
.X ±.030		DRAWN		HEAT TREAT & FINISH	
.XX ±.015		CHECK			
.XXX ±.005		RELEASE			
ANGLE TOL ±1/2		DATE			
FINISH 80V		DATE			
REMOVE ALL BURRS		DATE			
B	REDESIGNED TO RELOCATE T-11A CAVITY	8-24-92	DAS		
A	ADDED INTERNAL DRAIN OPTION	6-4-92	DAS		
LET	REVISION	DATE	DRN	CHK	REL

