




REVISION	PART NO.	WFE
----------	----------	-----

T19-A CAVITY
1.156 LS. DEPTH
TYP (4) PLACES.

MOUNTING PROVISIONS:
.375-16 UNC x .62 DEEP
TYP (2) PLCS.

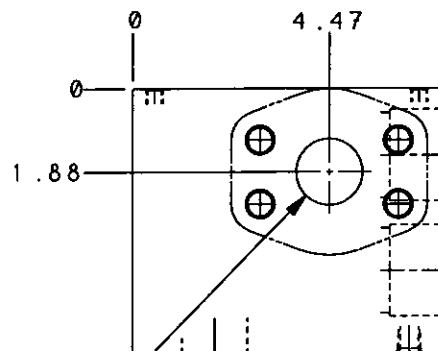


1.50 CODE-62, 4-BOLT
FLANGE PATTERN,
TYPICAL (4) PLACES.
MTG PROVISIONS:
.625-11 UNC x 1.38 DP
TYPICAL (16) PLACES

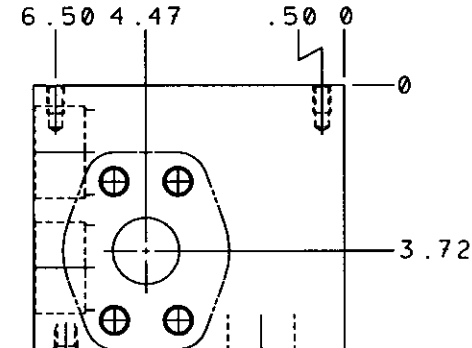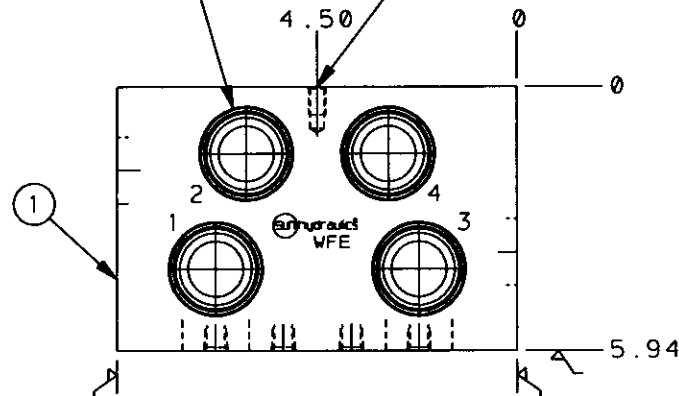

STAMPING NOTE: DO NOT
STAMP BELOW THIS LINE }


.25-18 NPTF PORT
TYP (4) PLACES.

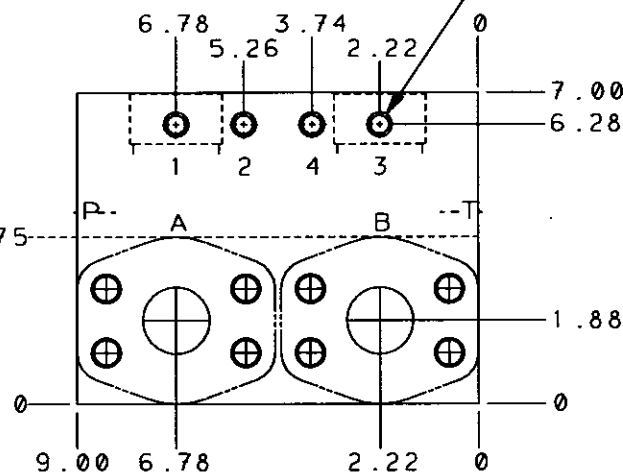

NOTES:

- 1) ALUMINIUM BODIES-3000 PSI
MAXIMUM CONTINUOUS SERVICE
PRESSURE.

SYMBOL

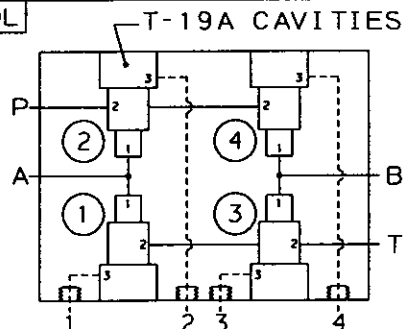

LET	REVISION	DATE	DRN	CHK	REL

OUTLINE DRAWING

TITLE 4xT-19A CAVITY, 4-WAY
DIRECTIONAL VALVE CIRCUIT
(1.50 CODE-62 FLANGES)

SCALE	REF.	MATERIAL
1:3	WFF : WFG	ALUM / SG. IRON
DRAWN	CHECK	RELEASE
G. Madden	CCM	
DATE	DATE	DATE
30 OCT 91	06 NOV 91	

REVISION	PART NO.	WFE
----------	----------	-----



1	159-663-001	BODY	1
ITEM	PART NO.	PART NAME	QTY