


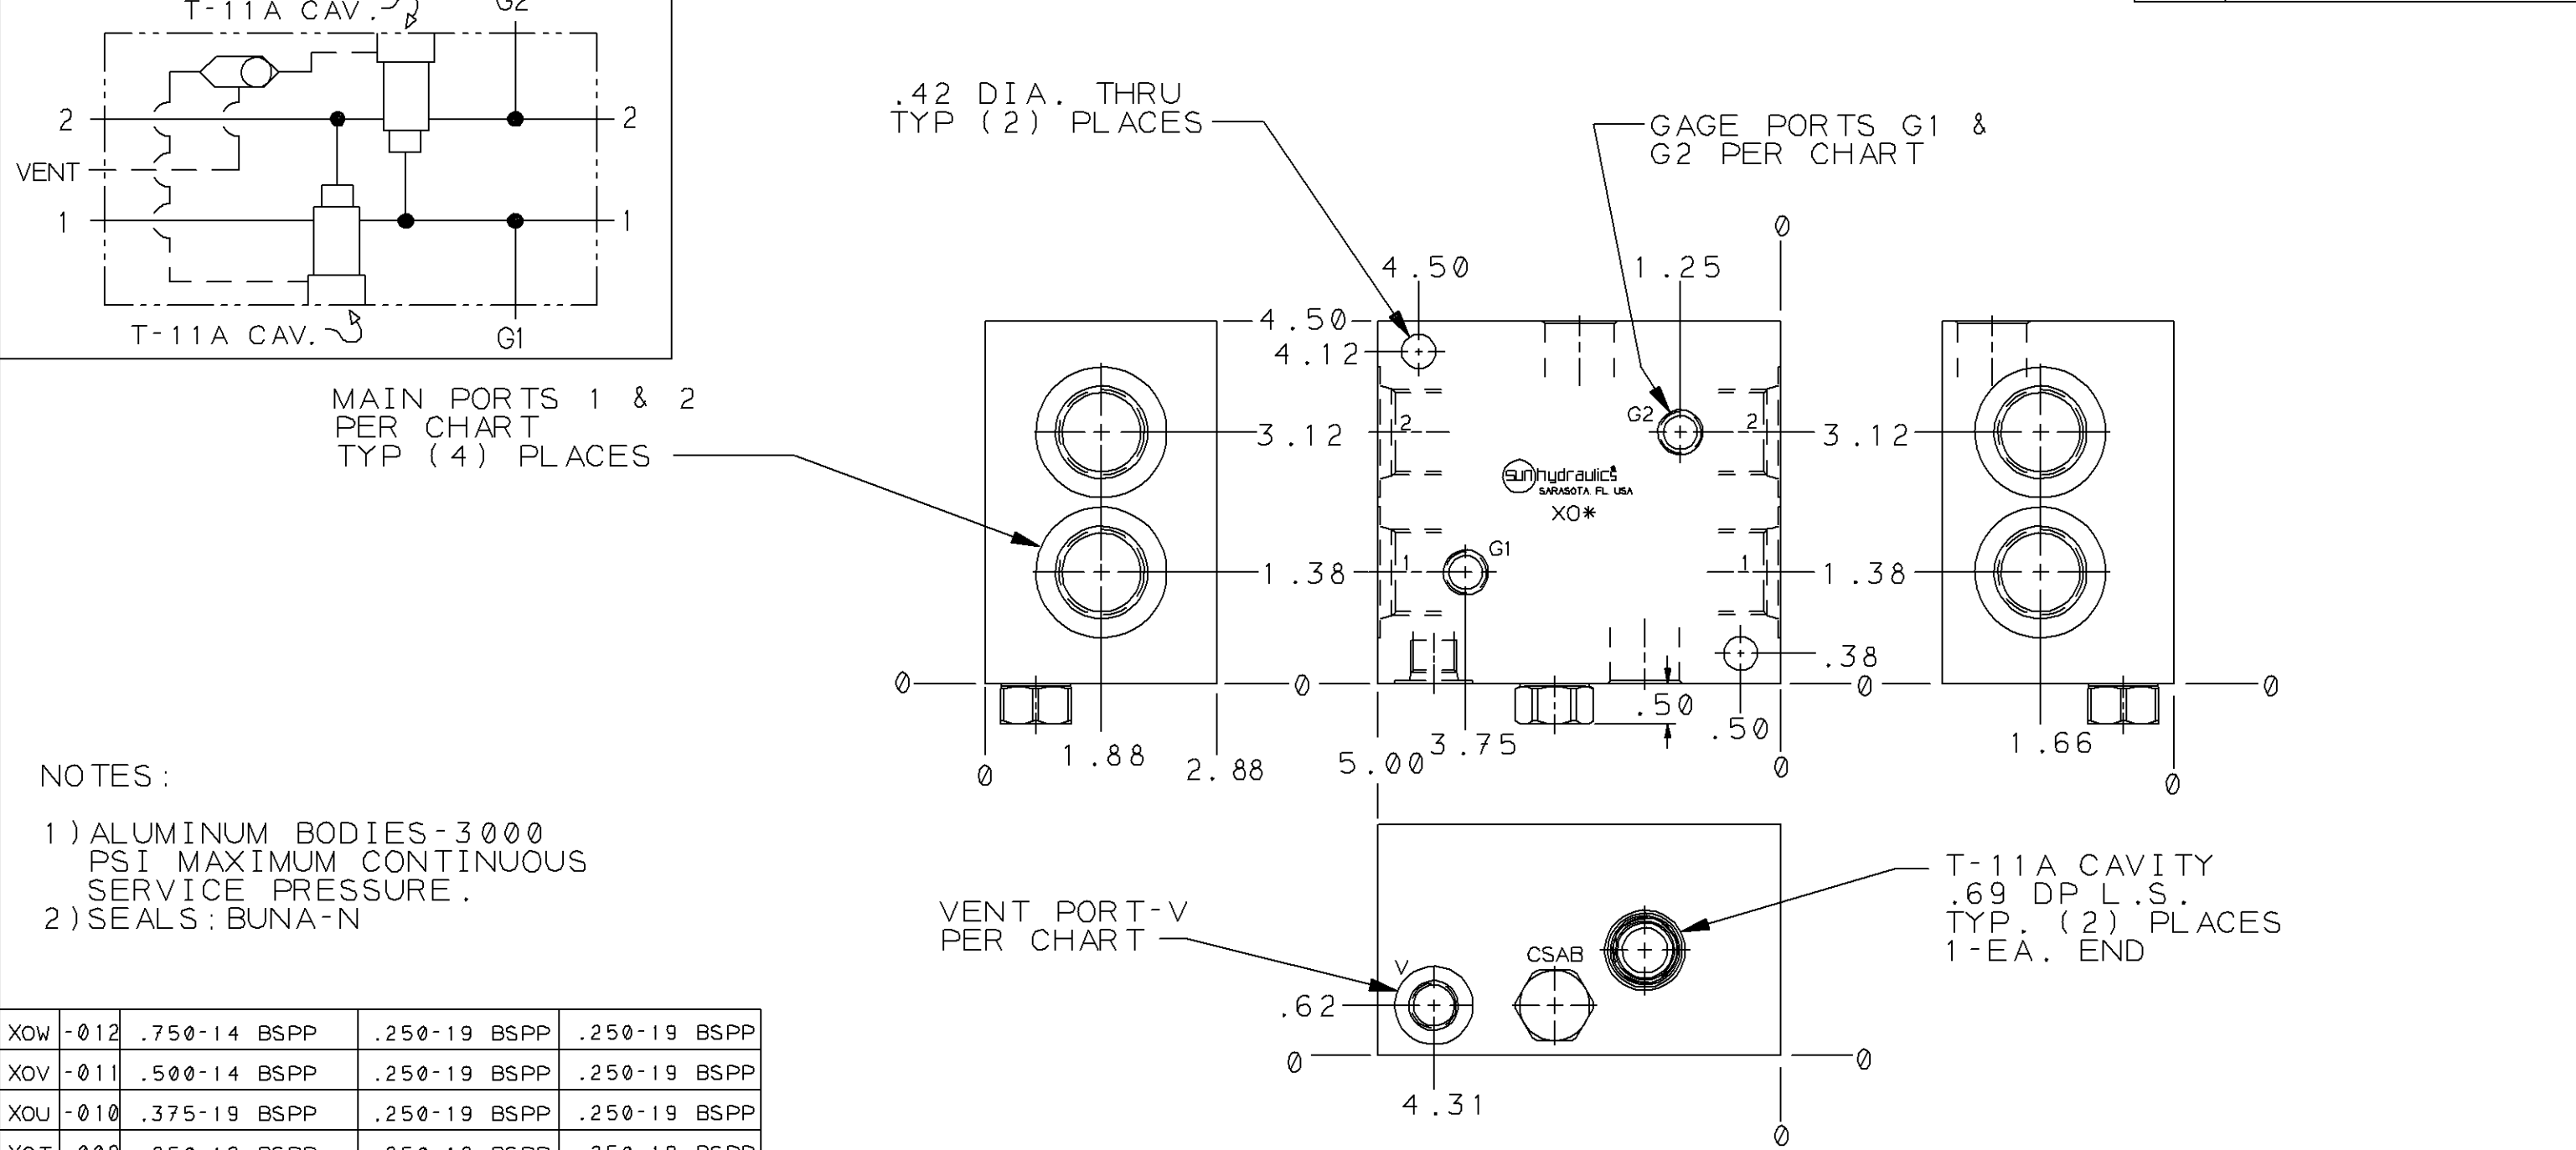

- NOTES :
- 1) ALUMINUM BODIES-3000 PSI MAXIMUM CONTINUOUS SERVICE PRESSURE.
 - 2) SEALS: BUNA-N

XOW	-012	.750-14 BSPP	.250-19 BSPP	.250-19 BSPP
XOV	-011	.500-14 BSPP	.250-19 BSPP	.250-19 BSPP
XOU	-010	.375-19 BSPP	.250-19 BSPP	.250-19 BSPP
XOT	-009	.250-19 BSPP	.250-19 BSPP	.250-19 BSPP
XOL	-008	SAE-12	.250-18 NPTF	SAE-6
XOK	-007	SAE-10	.250-18 NPTF	SAE-6
XOJ	-006	SAE-8	.250-18 NPTF	SAE-6
XOI	-005	SAE-6	.250-18 NPTF	SAE-6
XOD	-004	.750-14 NPTF	.250-18 NPTF	.250-18 NPTF
XOC	-003	.500-14 NPTF	.250-18 NPTF	.250-18 NPTF
XOB	-002	.375-18 NPTF	.250-18 NPTF	.250-18 NPTF
XOA	-001	.250-18 NPTF	.250-18 NPTF	.250-18 NPTF
MODEL NO.	BODY DASH NO.	MAIN PORTS 1 & 2	PORTS G1 & G2	PORT "V"

UNLESS OTHERWISE SPECIFIED					OUTLINE & ASSEMBLY				REVISION		PART NO.	
TITLE CROSS-PORT T-11A CAVITIES W/SHUTTLE					SCALE 1/2				REF.		XO*	
DIMENSION TOL .x = ±.030 .xx = ±.015 .xxx = ±.005					MATERIAL ALUM. BODY				HEAT TREAT & FINISH		SUN hydraulics CORPORATION	
ANGLE TOL ±1/4 FINISH 80 ✓ REMOVE ALL BURRS					DRAWN BR5 CHECK R/B RELEASE				DATE 25MAY88		701 TALLEVAST ROAD SARASOTA, FLORIDA 34243, USA TELEPHONE (941) 362-1300	
COR. SAE SPOTFACE DIA.'S					DATE 26MAY88				DATE			
REVISION					DATE				REL			
DATE 07FEB00					SMS DSS				DRN CHK			
LET												