





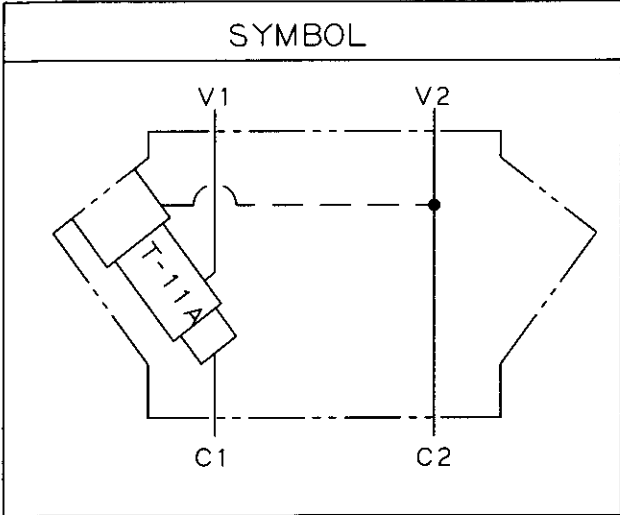


REVISION	PART NO.
A	XVI

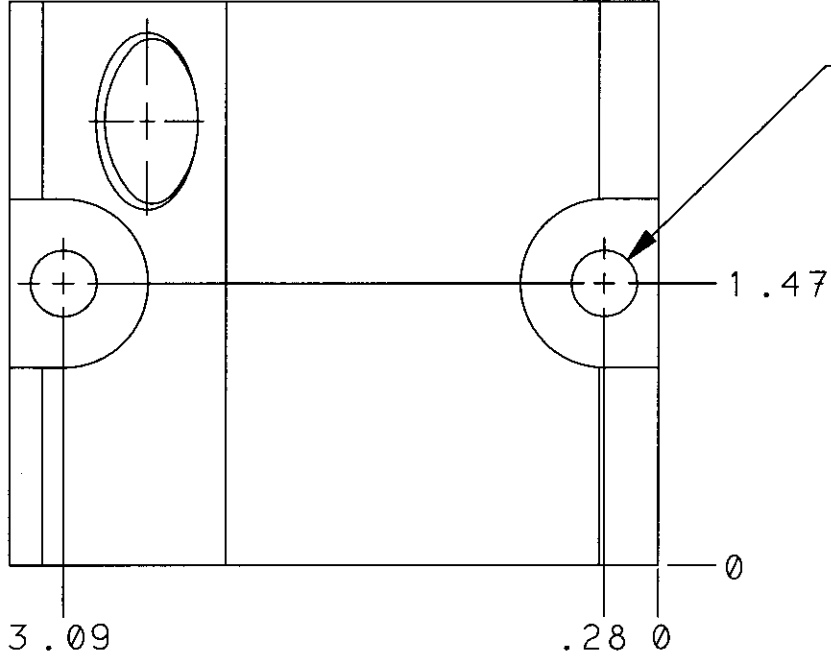

.34 DIA. THRU
TYP (2) PLACES
CBORED FOR 5/16
HEX HD BOLTS.

- NOTES:
- 1) ALUMINUM BODIES-3000 PSI
MAXIMUM CONTINUOUS SERVICE
PRESSURE.
 - 2) FOR OTHER OPTIONS SEE
OPTION SHEET.

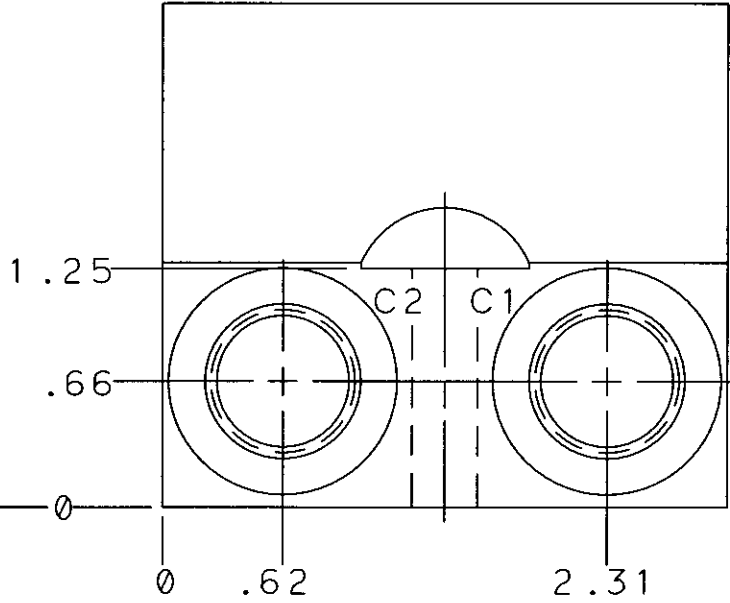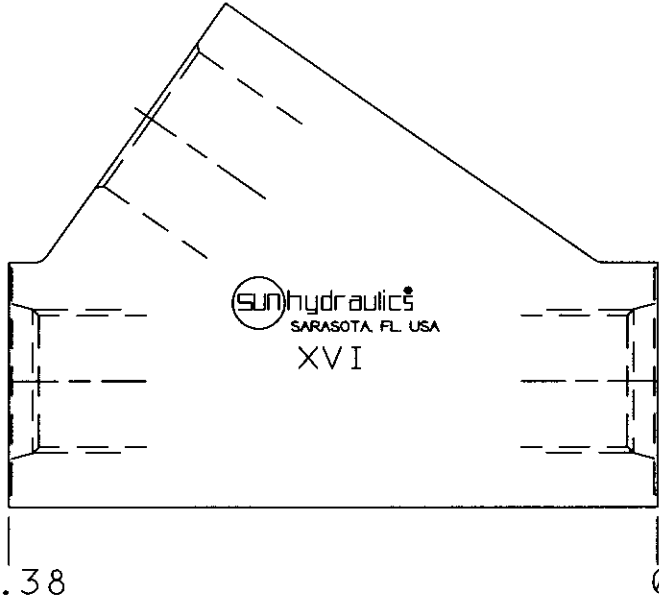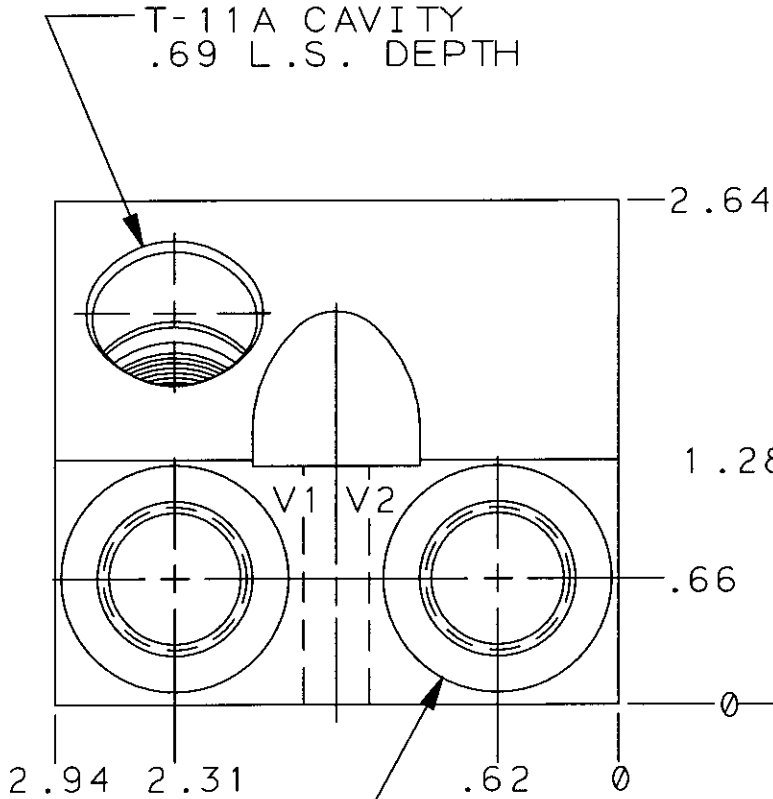

SAE-8 PORT
TYP (4) PLACES

ITEM	PART NO.	PART NAME	QTY
1	151-629-004	BODY	1

REVISION	DATE	DRN	CHK	REL
A	23NOV98	RJB	NHH	8968
LET				

UNLESS OTHERWISE SPECIFIED
DIMENSION TOL
.x = ±.030
.xx = ±.015
.xxx = ±.005
ANGLE TOL ± 1/2
FINISH 80✓
REMOVE ALL BURRS

OUTLINE & ASSEMBLY

TITLE	SCALE	REF.	MATERIAL
BODY-SINGLE, IN LINE, INTERNAL PILOT T-11A CAV	1/1		ALUMINUM
DRAWN	CHECK	RELEASE	HEAT TREAT & FINISH
BR5	R/B		
DATE	DATE	DATE	
8-18-89	8-19-89		

SUN hydraulics[®]
CORPORATION
701 TALLEVAST ROAD
SARASOTA, FLORIDA 34243, USA
TELEPHONE (941) 362-1300