


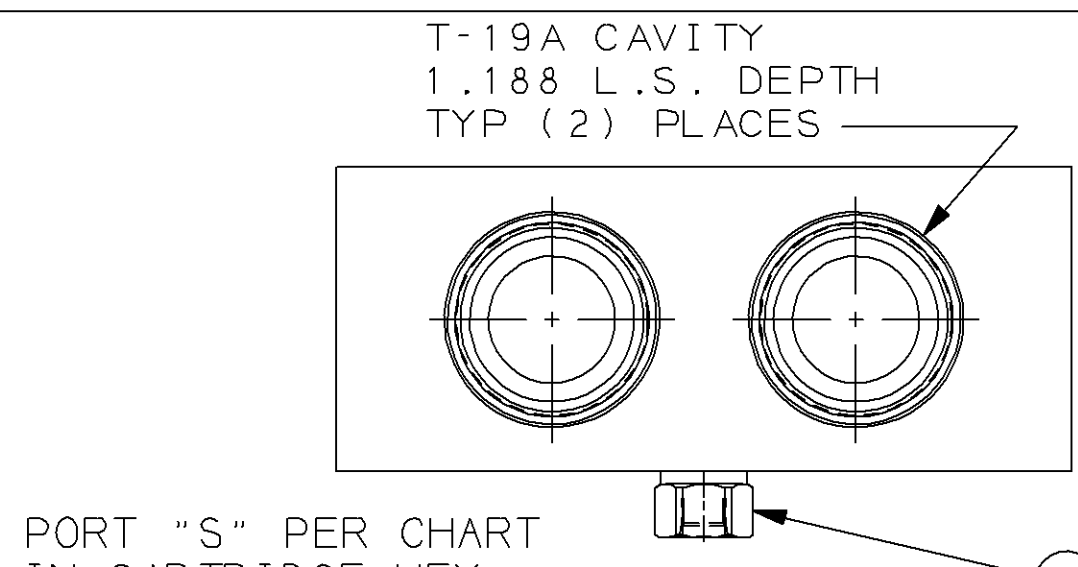

IN CARTRIDGE HEX

5.00

2.44

0.50

3.62

6.75

7.25

YN*

CSAA

3.00

1.50

0


2.12

5.12

.41 DIA THRU MOUNTING HOLE TYP (2) PLACES

NOTES :

OUTLINE & ASSEMBLY

- | | | | | | | | | | | | | | | | | | |
|-----|--------------------------------------|--|---------|--|-----|--|-----|----------------------------|-------|---|------------------|-------|------------|-------------------|--------------|---|--|
| | | | | | | | | UNLESS OTHERWISE SPECIFIED | | TITLE DUAL CROSS-PILOTED T-19A CAVITIES, IN-LINE WITH SHUTTLE | | | REVISION A | | PART NO. YN* | | |
| | | | | | | | | DIMENSION TOL | | SCALE 1/2 | | REF. | | MATERIAL ALUMINUM | |  | |
| | | | | | | | | .x = ±.030 | | DRAWN | | CHECK | | RELEASE | | | HEAT TREAT & FINISH
 |
| | | | | | | | | .xx = ±.015 | | DATE | | DATE | | DATE | | | |
| | | | | | | | | .xxx = ±.005 | | | | | | | | | |
| A | SAE'S WERE SUN STD | | 31OCT00 | | MWB | | DSS | | 10112 | | ANGLE TOL ± 1/2 | | | | | | |
| --- | CHARTED DWG.--WAS 6 INDIVIDUAL DWG'S | | 3-24-92 | | DAS | | | | | | FINISH 80✓ | | | | | | |
| LET | REVISION | | DATE | | DRN | | CHK | | REL | | REMOVE ALL BURRS | | | | | | |