

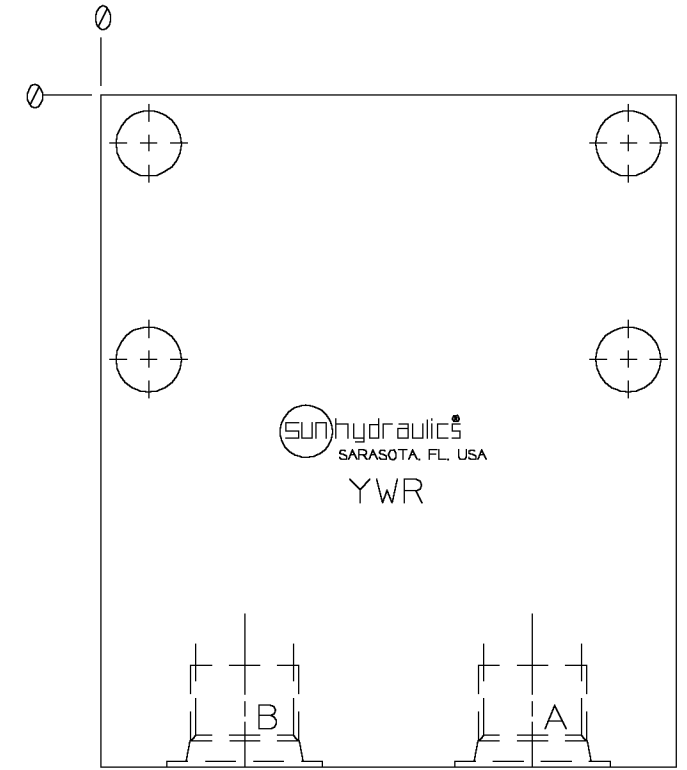
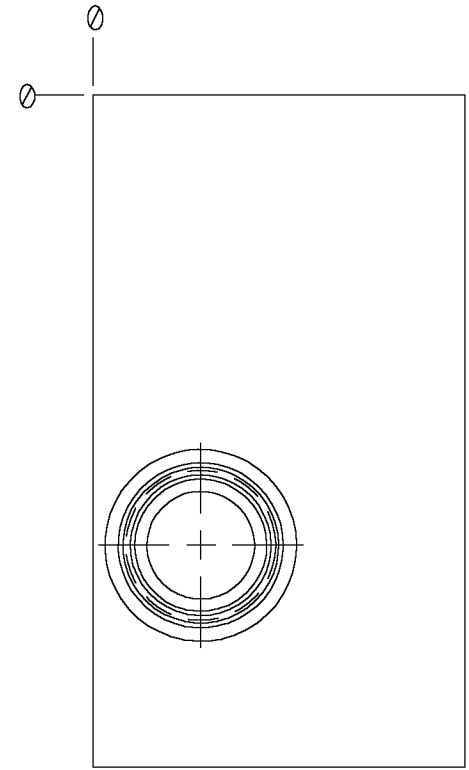


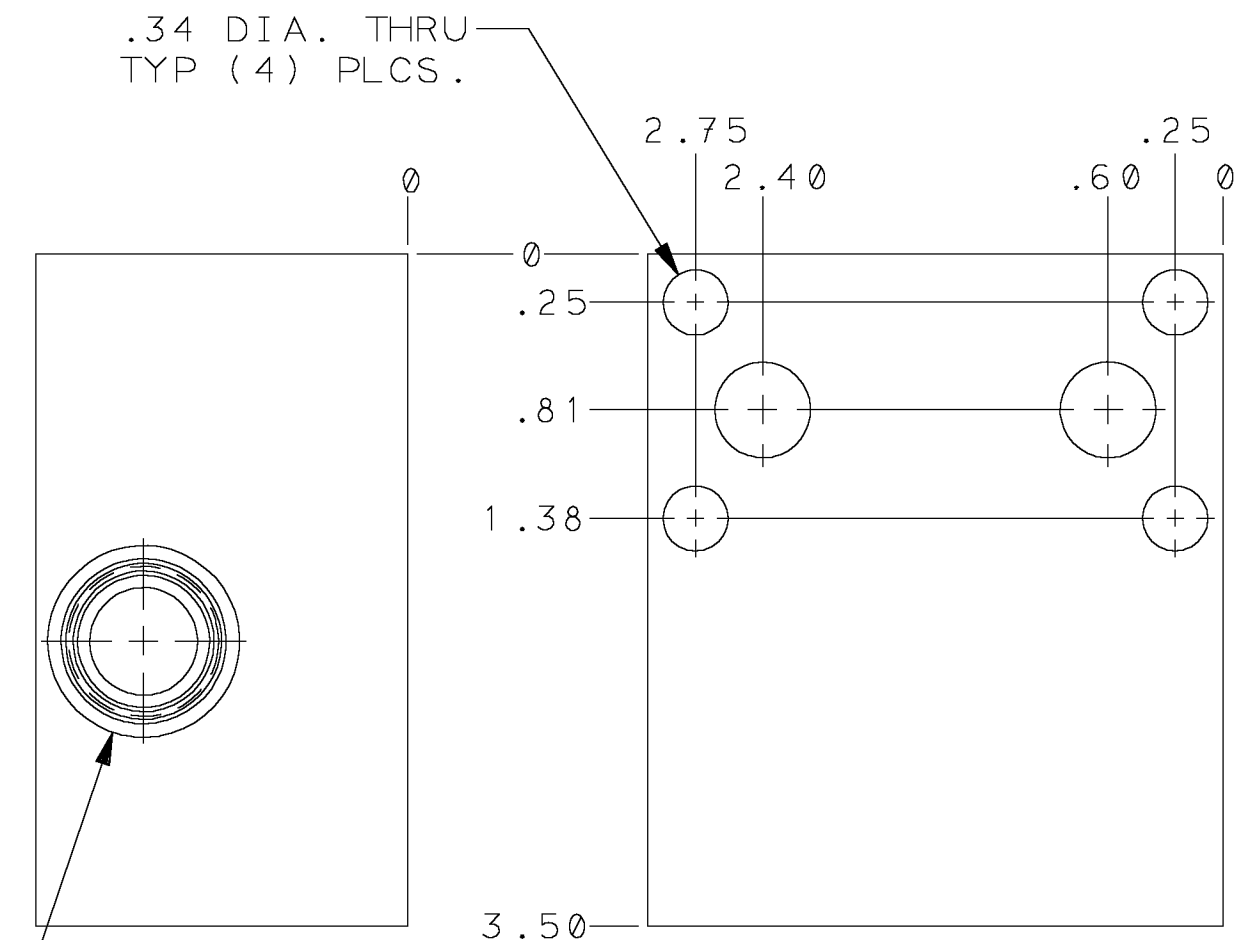


T-10A CAVITY
.03 L.S. DEPTH
TYP (2) PLACES

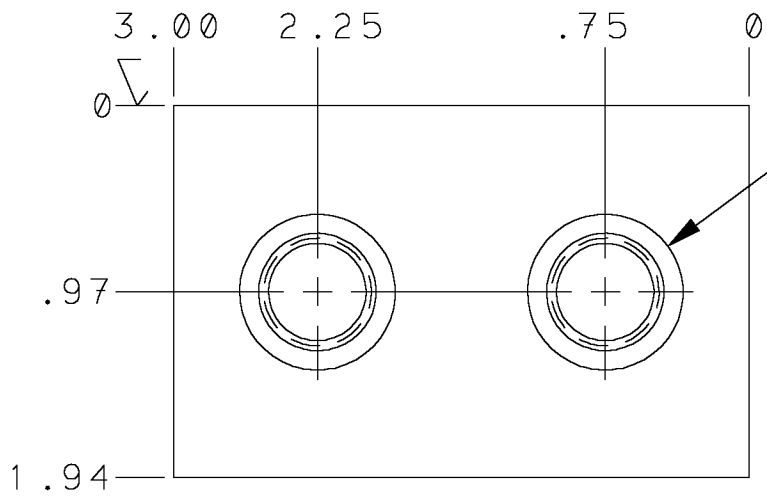

SAE-6 PORT
TYP (2) PLACES

NOTES :
1) ALUMINUM BODIES-3000 PSI
MAXIMUM CONTINUOUS SERVICE
PRESSURE.

SYMBOL

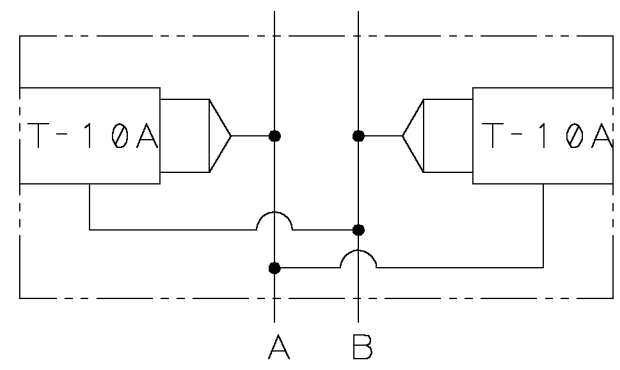

C	REDRAWN (WAS CHARTED ON YXD DRAWING .)	1 - 8 - 91	BRS	R/B	
LET	REVISION	DATE	DRN	CHK	REL

UNLESS OTHERWISE SPECIFIED		TITLE BODY-FOR CROSS RELIEF CHARLYNN MOTOR MOUNTING				REVISION C		PART NO. YWR			
DIMENSION TOL		SCALE REF.		MATERIAL							
.x = ±.030		1 / 1		ALUMINUM							
.xx = ±.015		DRAWN HHP		CHECK JDA						RELEASE	
.xxx = ±.005		DATE 10-12-79		DATE 10-18-79						HEAT TREAT & FINISH	
ANGLE TOL ± 1/2											
FINISH 80✓											
REMOVE ALL BURRS						SARASOTA, FLORIDA 34243, USA TELEPHONE (941) 362-1300					

1	150-464-004	BODY	1
ITEM	PART NO.	PART NAME	QTY

**SUN hydraulics**[®]
CORPORATION
701 TALLEVAST ROAD
SARASOTA, FLORIDA 34243, USA
TELEPHONE (941) 362-1300