


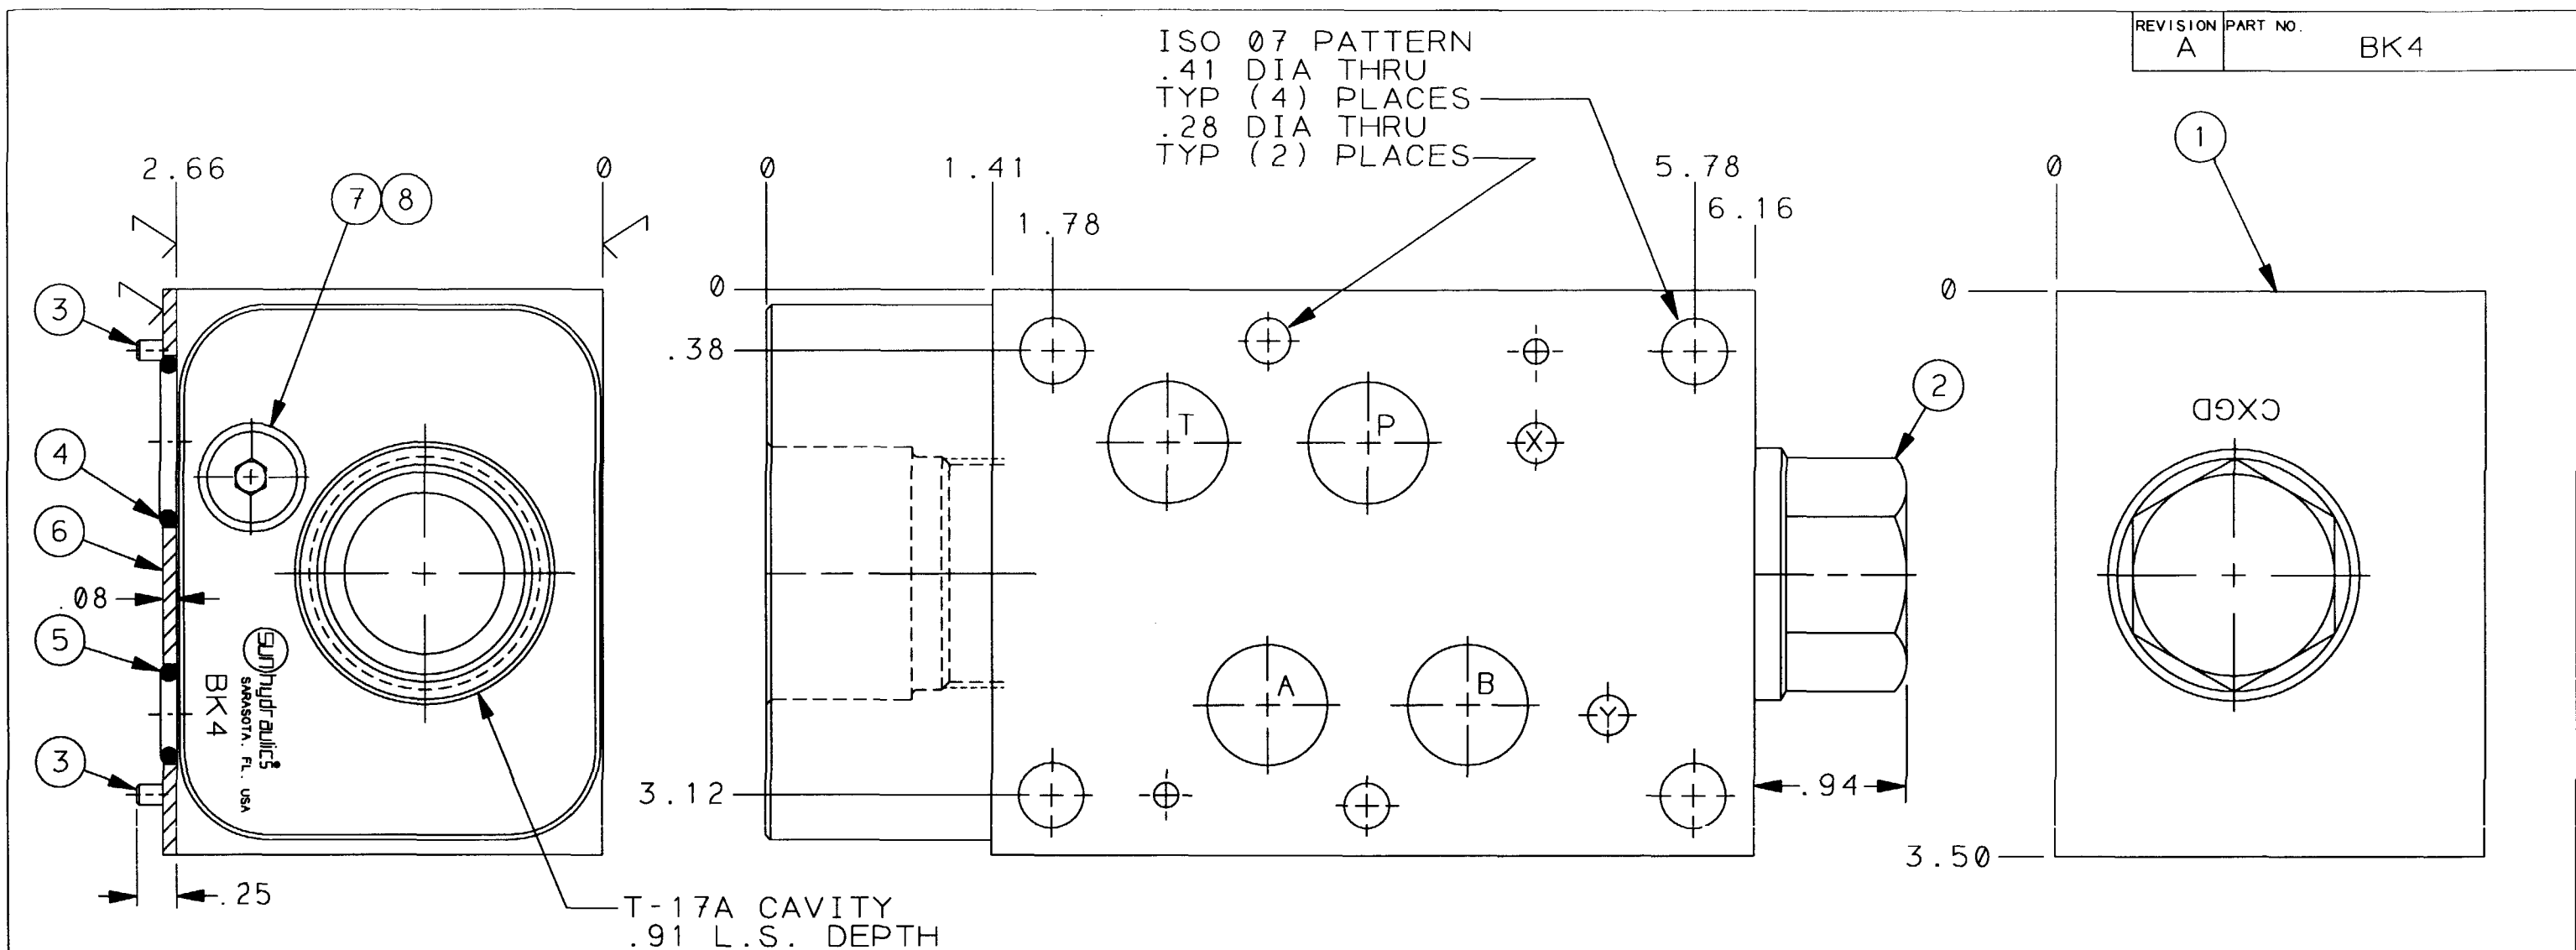


NOTES :

- 1) SEALS: BUNA-N
- 2) ALUMINUM BODIES-3000 PSI MAX. CONTINUOUS SERVICE PRESSURE.
- 3) CXGD XCN CARTRIDGE: CRACKING PRESSURE: 30 PSI $\pm$ 3 CHECK SEAT: STEEL

4) ORDERING INFO: RSHC LAN BK4

CART. TO BE INSTALLED IN T-17A CAVITY. SEAL TYPE IN RSHC DETERMINES ITEM 2 SEAL TYPE

8	500-002-904	O RING	1
7	330-006-004	SAE HEX SOCKET O RING BOSS PLUG	1
6	700-006	SEAL PLATE	1
5	500-001-111	O RING	2
4	500-001-118	O RING	4
3	811-001-006	ROLL PIN	2
2	CXGD XCN	CHECK VALVE	1
1	151-144	BODY	1
ITEM	PART NO.	PART NAME	QTY

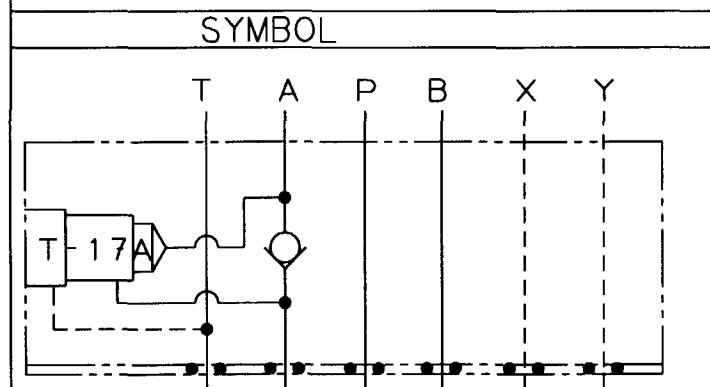

REVISION	DATE	DRN	CHK	REL
#7 WAS 330-006-006	22 NOV94	BRS		6167
#8 WAS 500-002-906.				
LET				

UNLESS OTHERWISE SPECIFIED			
DIMENSION	TOL	SCALE	REF.
.x	$\pm .030$	1:1	YSFB LAN
.xx	$\pm .015$		
.xxx	$\pm .005$		
ANGLE	TOL $\pm \frac{1}{2}$		
FINISH	80 $\checkmark$		
REMOVE ALL BURRS			
DRAWN	CHECK	RELEASE	
BRS	JLB	3215	
DATE	DATE	DATE	
7-31-91	8-2-91	8-7-91	

OUTLINE & ASSEM.

TITLE ISO 07 SANDWICH- T-17A CAVITY ON "A" WITH REV. FREE FLOW CHECK.

REVISION	PART NO.
A	BK4

SUN hydraulics
 CORPORATION
 1500 UNIVERSITY PARKWAY
 SARASOTA, FLORIDA 34243, USA
 TELEPHONE (813) 355-2983