

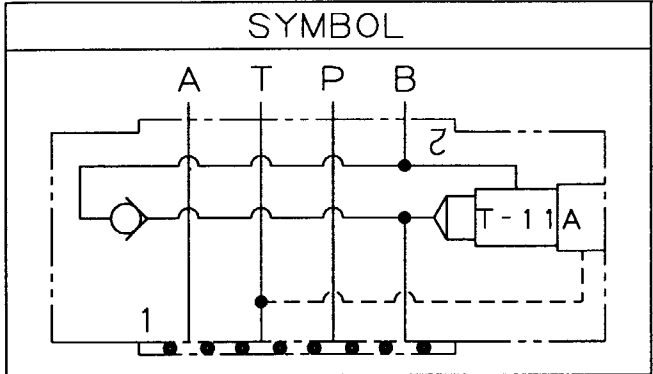
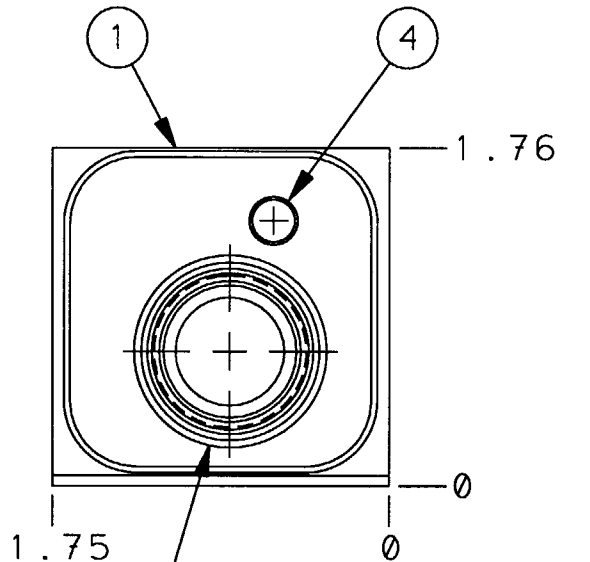


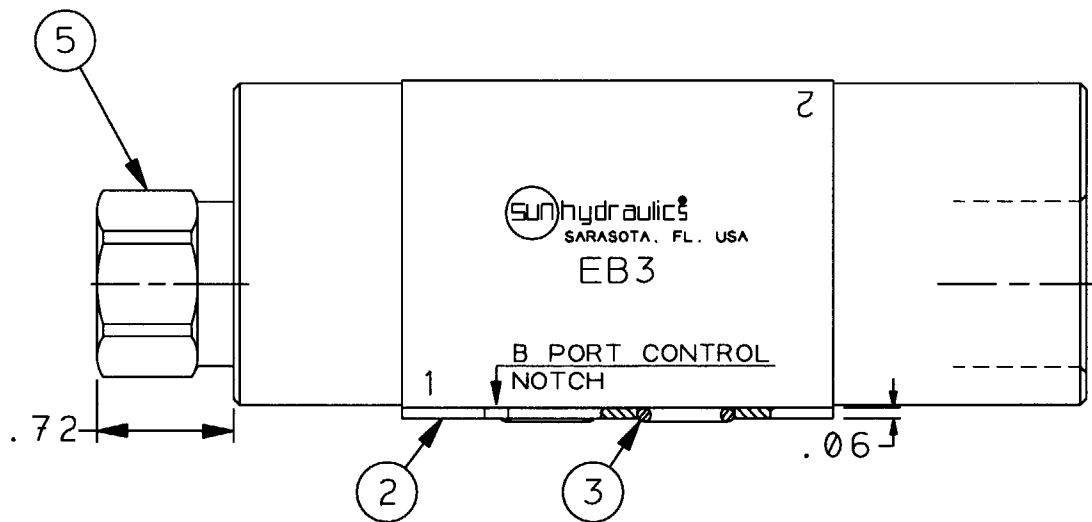

| REVISION | PART NO. |
|----------|----------|
| C        | EB3      |

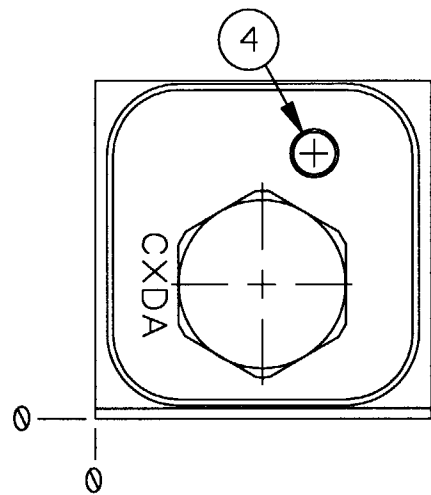


NOTES:

- 1) SEALS: BUNA-N  
2) ALUMINUM BODIES-3000 PSI  
MAXIMUM CONTINUOUS SERVICE  
PRESSURE.  
3) CXDA XCN CARTRIDGE:  
CRACKING PRESSURE: 30 PSI ± 3  
CHECK SEAT: STEEL  
4) ORDERING INFO:  
PBDB FAN EB3

CART. TO BE INSTALLED IN  
T-11A CAV. SEAL TYPE IN PBDB  
DETERMINES ITEM 3&5 SEAL TYPE

\*5) CUSTOMER TO INSTALL LOCATING  
PIN (ITEM 6) FOR FUNCTIONAL  
ORIENTATION DESIRED.

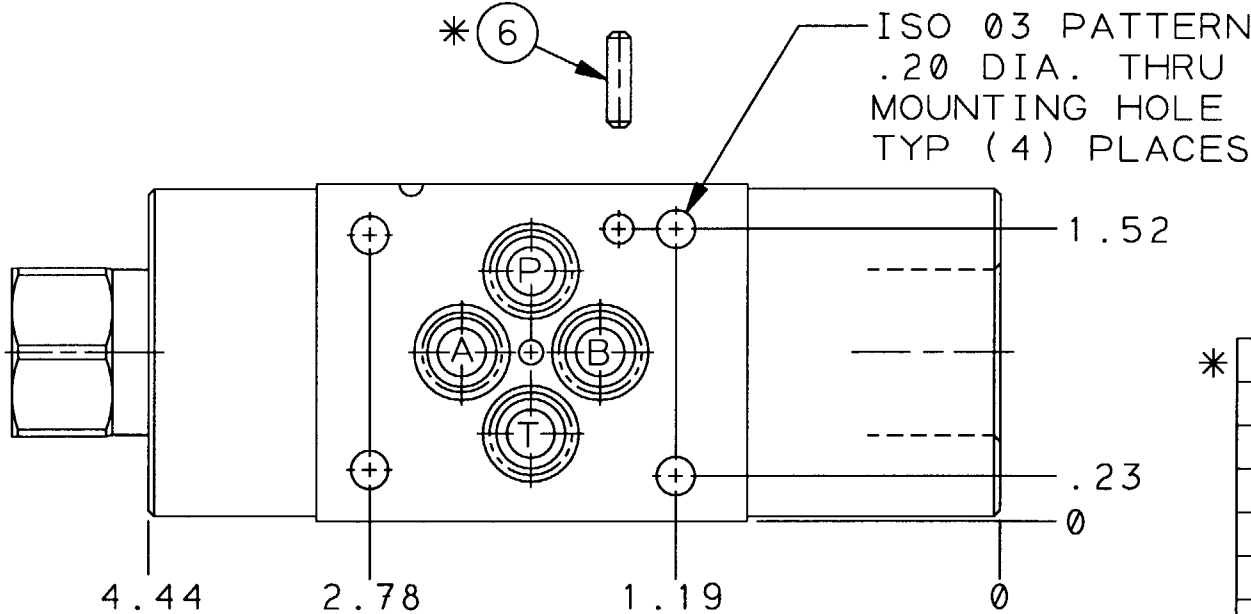

| ITEM | PART NO.    | PART NAME   | QTY |
|------|-------------|-------------|-----|
| * 6  | 811-001-006 | PIN         | 1   |
| 5    | CXDA XCN    | CHECK VALVE | 1   |
| 4    | 850-004-250 | PLUG        | 2   |
| 3    | 500-001-012 | "O" RING    | 4   |
| 2    | 700-002     | SEAL PLATE  | 1   |
| 1    | 150-283     | BODY        | 1   |

| UNLESS OTHERWISE SPECIFIED |  |  |  | TITLE                                    |  |  |  |
|----------------------------|--|--|--|------------------------------------------|--|--|--|
| DIMENSION TOL              |  |  |  | ISO 03 SANDWICH-B PORT W/FREE FLOW CHECK |  |  |  |
| .X ±.030                   |  |  |  | SCALE REF.                               |  |  |  |
| .XX ±.015                  |  |  |  | 1:1 YPOB FAN                             |  |  |  |
| .XXX ±.005                 |  |  |  | MATERIAL                                 |  |  |  |
| ANGLE TOL ± 1/2            |  |  |  | ALUMINUM                                 |  |  |  |
| FINISH 80✓                 |  |  |  | HEAT TREAT & FINISH                      |  |  |  |
| REMOVE ALL BURRS           |  |  |  | DRAWN CHECK RELEASE                      |  |  |  |
|                            |  |  |  | BRS JLB 3154                             |  |  |  |
|                            |  |  |  | DATE DATE DATE                           |  |  |  |
|                            |  |  |  | 6-25-91 6-26-91 7-1-91                   |  |  |  |

