




SYMBOL

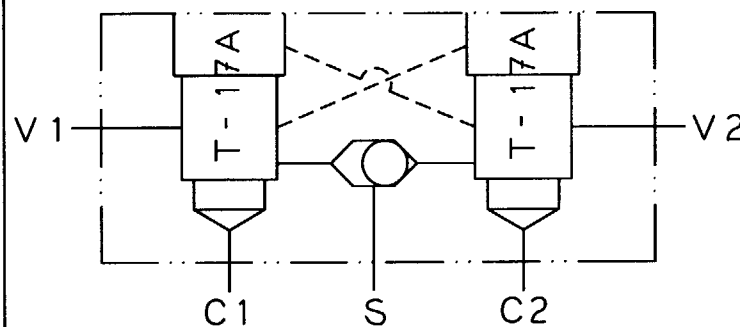

T-17A CAVITY
.938 L.S. DEPTH
TYP (2) PLACES


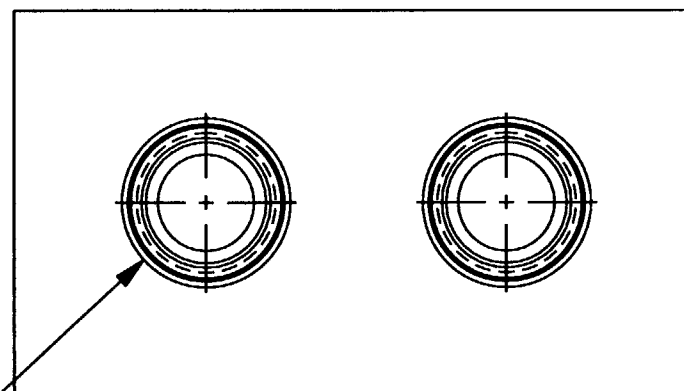


PORT "S" IN CART. HEX.
SEE CHART

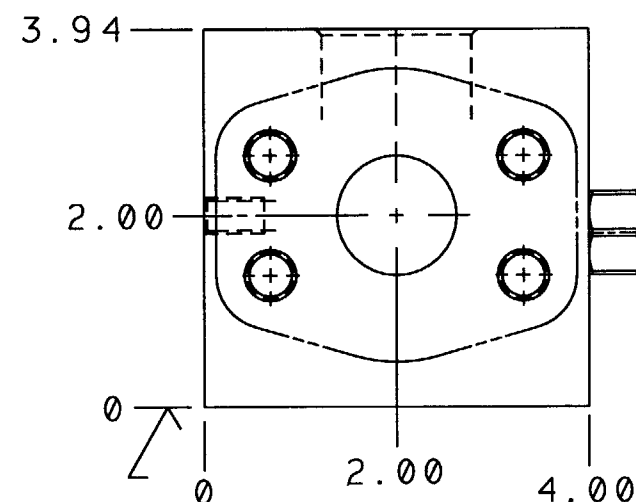

INCH: .500-13 UNC x 1.00 DP
METRIC: M14x2.0-6H x 1.00 DP
TYP (16) PLACES


1.25 DIA SAE CODE 62
4-BOLT FLANGE PATTERN
TYP (4) PLACES

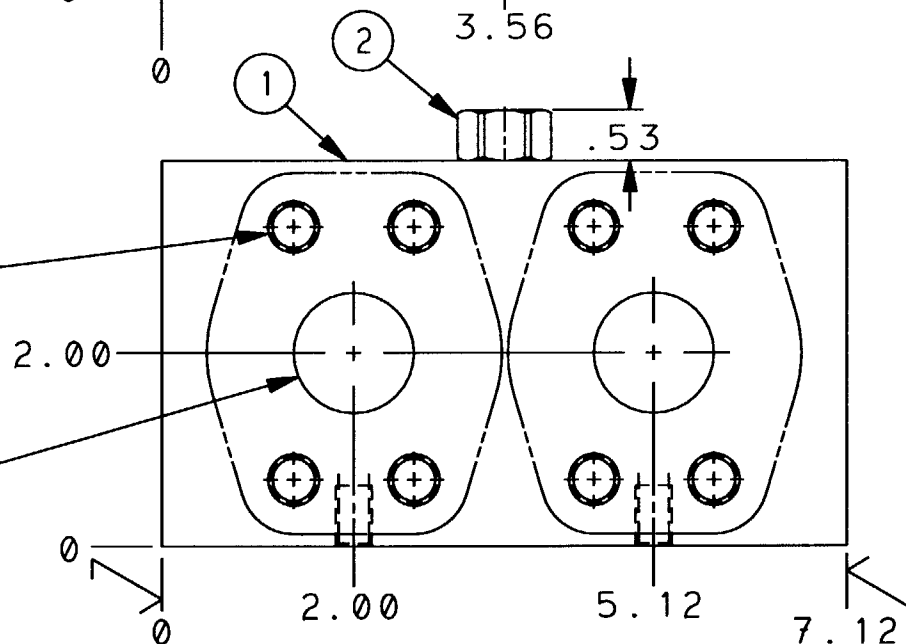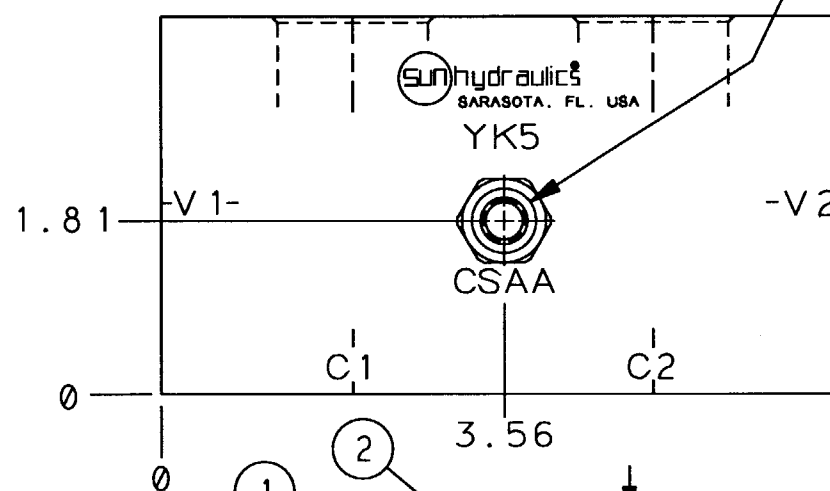

		REVISION	PART NO. YK5		
MODEL No.	BODY DASH No.	SHUTTLE PORT "S"	FLG AND BODY MTG THD	ITEM-2 SHUTTLE PART No.	
YK5	-001	SAE-4	INCH	CSAA EXN	
YK5/M	-002	.250-19 BSPP	METRIC	CSAA BXN	

NOTES:

- 1) SEALS: BUNA-N
- 2) ALUMINUM BODIES: 3000 PSI MAX. CONTINUOUS SERVICE PRESSURE
- 3) OTHER OPTIONS: SEE OPTION SHEET

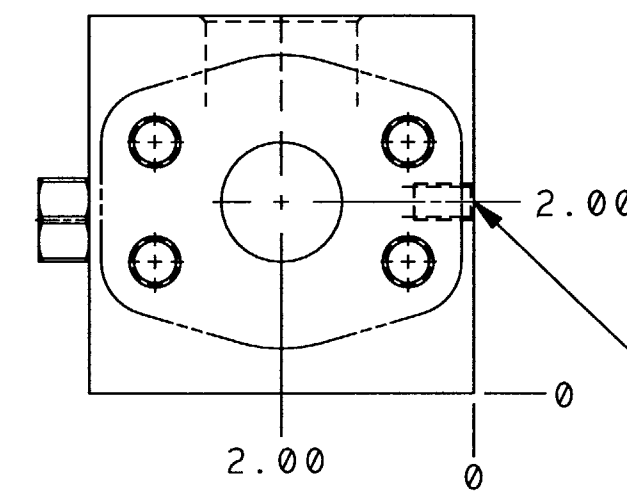

MOUNTING HOLES:
INCH: .375-16 UNC x .62 DP
METRIC: M10x1.5-6H x .62 DP
TYP (2) PLACES

2	CSAA *XN	SHUTTLE	1
1	152-891-***	BODY	1
ITEM	PART NO.	PART NAME	QTY

OUTLINE & ASSEMBLY

TITLE BODY-DUAL LINE-MOUNTED
T-17A CAVITIES CROSS-PILOTED
W/SHUTTLE 1.25 CODE 62 FLANGE

DRAWN	CHECK	RELEASE	DATE
DA		3861	7-30-92
DATE	DATE	DATE	DATE
7-30-92			

REVISION	PART NO.
	YK5

SUN hydraulics
CORPORATION
1500 UNIVERSITY PARKWAY
SARASOTA, FLORIDA 34243, USA
TELEPHONE (813) 355-2983

LET	REVISION	DATE	DRN	CHK	REL

UNLESS OTHERWISE SPECIFIED
DIMENSION TOL
.x = ±.030
.xx = ±.015
.xxx = ±.005
ANGLE TOL ±½
FINISH 80✓
REMOVE ALL BURRS