


CHART A (PORT OPTIONS)					
MODEL NO.	TH'D TYPE	PORTS 1 & 2	PORT 3	PORT G	BODY DASH NO. ITEM 1
E7A	INCH	.250-18 NPTF	.250-18 NPTF	.250-18 NPTF	-001
E7B	INCH	.375-18 NPTF	.250-18 NPTF	.250-18 NPTF	-002
E7C	INCH	.500-14 NPTF	.250-18 NPTF	.250-18 NPTF	-003
E7I	INCH	SAE-6	SAE-6	.250-18 NPTF	-004
E7J	INCH	SAE-8	SAE-6	.250-18 NPTF	-005
E7K	INCH	SAE-10	SAE-6	.250-18 NPTF	-006
E7T	METRIC	.250-19 BSPP	.250-19 BSPP	.250-19 BSPP	-007
E7U	METRIC	.375-19 BSPP	.250-19 BSPP	.250-19 BSPP	-008
E7V	METRIC	.500-14 BSPP	.250-19 BSPP	.250-19 BSPP	-009




MOUNTING PROVISIONS
INCH: .375-16UNC x
.62 DP.
METRIC: M10 x 1.5-6H
x .62 DP.

NOTES:

1. SEALS: BUNA-N
2. ALUMINUM BODIES-3000
PSI MAXIMUM CONTINUOUS
SERVICE PRESSURE.
3. CXDA XCN CARTRIDGE:
CRACKING PRESSURE: 30 PSI ±3
CHECK SEAT: STEEL
4. ORDERING INFO:
RSDC LAN E7*

MAIN PORT DESIGNATION

CART. TO BE INSTALLED IN T-11A
CAVITIES. SEAL TYPE IN RSDC
DETERMINES ITEM 2 SEAL TYPE

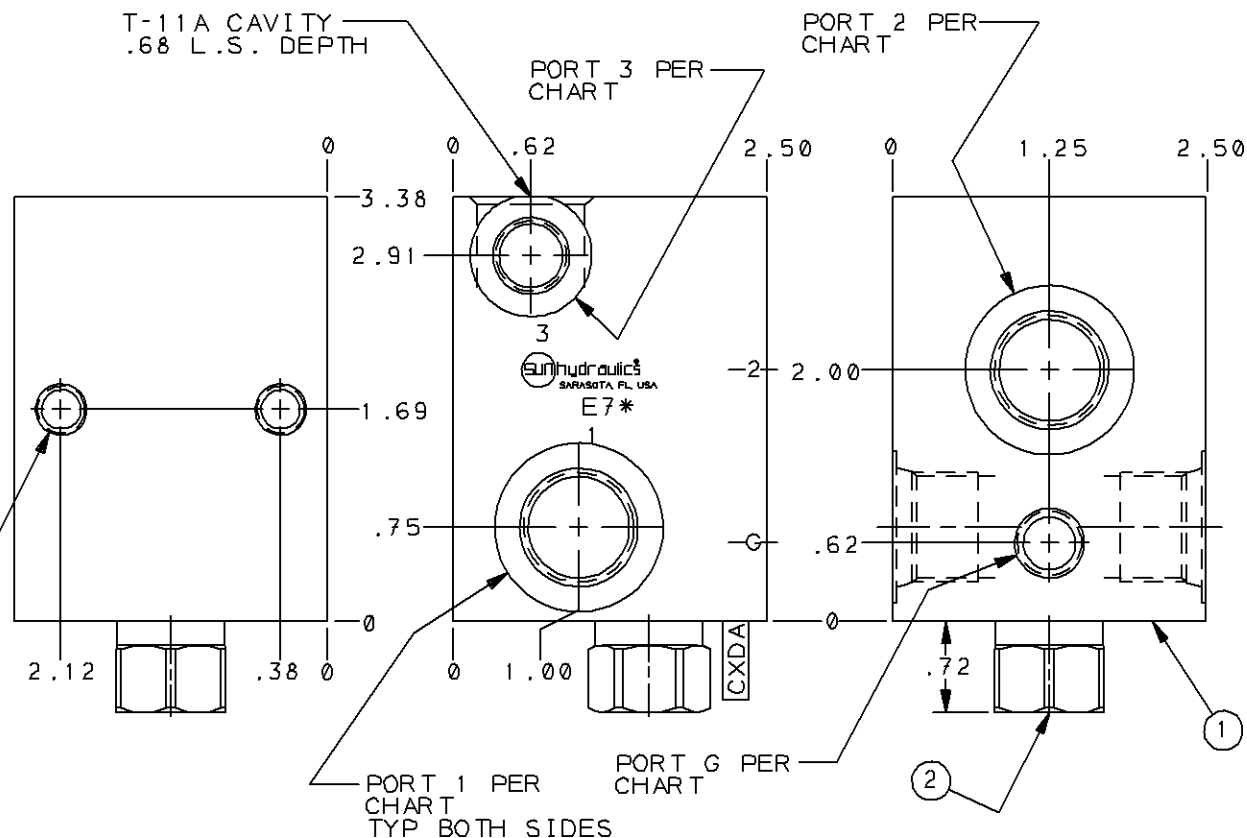

REVISION	DATE	DRN	CHK	REL
A	SAE'S WERE SUN STD	01AUG00	SMS	DSS 9921
-	REVISED SYMBOL	2-25-92	BRS	
LET				

UNLESS OTHERWISE SPECIFIED			
DIMENSION	TOL	SCALE	REF.
XXX	±.030		
XXX	±.015		
XXX	±.005		
ANGLE	TOL ±1/2		
FINISH	80 V		
REMOVE ALL	BURRS		
DATE	DATE	DATE	DATE
8-14-98	10-3-98		

OUTLINE & ASSEMBLY			
TITLE	T-11A CAVITY W/FF CHECK USE W/SEQ. OR VENTED RELIEF	REVISION	A
PART NO.	E7*	PART NAME	
ITEM	2 CXDA XCN	CHECK VALVE	1
	1 51-090-SEE TABLE	BODY	1
		QTY	

SUN hydraulics
CORPORATION
1500 WEST UNIVERSITY PKWY
SARASOTA, FLORIDA 34243, USA
TELEPHONE (941) 362-1288