

CHART A (PORT OPTIONS)					
MODEL NUMBER	PORT G	PORTS 1 & 2	PORT 3	BODY DASH NO ITEM 1	TH'D TYPE
B7B	.250-18 NPTF	.375-18 NPTF	.250-18 NPTF	-001	INCH
B7C	.250-18 NPTF	.500-14 NPTF	.250-18 NPTF	-002	INCH
B7D	.250-18 NPTF	.750-14 NPTF	.250-18 NPTF	-003	INCH
B7J	.250-18 NPTF	SAE-8	SAE-6	-004	INCH
B7K	.250-18 NPTF	SAE-10	SAE-6	-005	INCH
B7L	.250-18 NPTF	SAE-12	SAE-6	-006	INCH
B7U	.250-19 BSPP	.250-18 NPTF	.250-18 NPTF	-007	INCH
B7V	.250-19 BSPP	.500-14 BSPP	.250-19 BSPP	-008	METRIC
B7W	.250-19 BSPP	.750-14 BSPP	.250-19 BSPP	-009	METRIC



INCH: .375-16UNC
x .62 DP.
METRIC: M10 x 1.5-6H
x .62 DP.
TYP (2) PLACES

NOTES:

1. SEALS: BUN
2. ALUMINUM BODIES-3000
PSI MAXIMUM CONTINUOUS
SERVICE PRESSURE.
3. CXFA XCN CARTRIDGE:
CRACKING PRESSURE: 30 PSI ±3
CHECK SEAT: STEEL
4. ORDERING INFO:
RSEC LAN B7*

MAIN PORT DESIGNATION

CART. TO BE INSTALLED IN T-2A
CAVITIES. SEAL TYPE IN RSFC
DETERMINES ITEM 2 SEAL TYPE

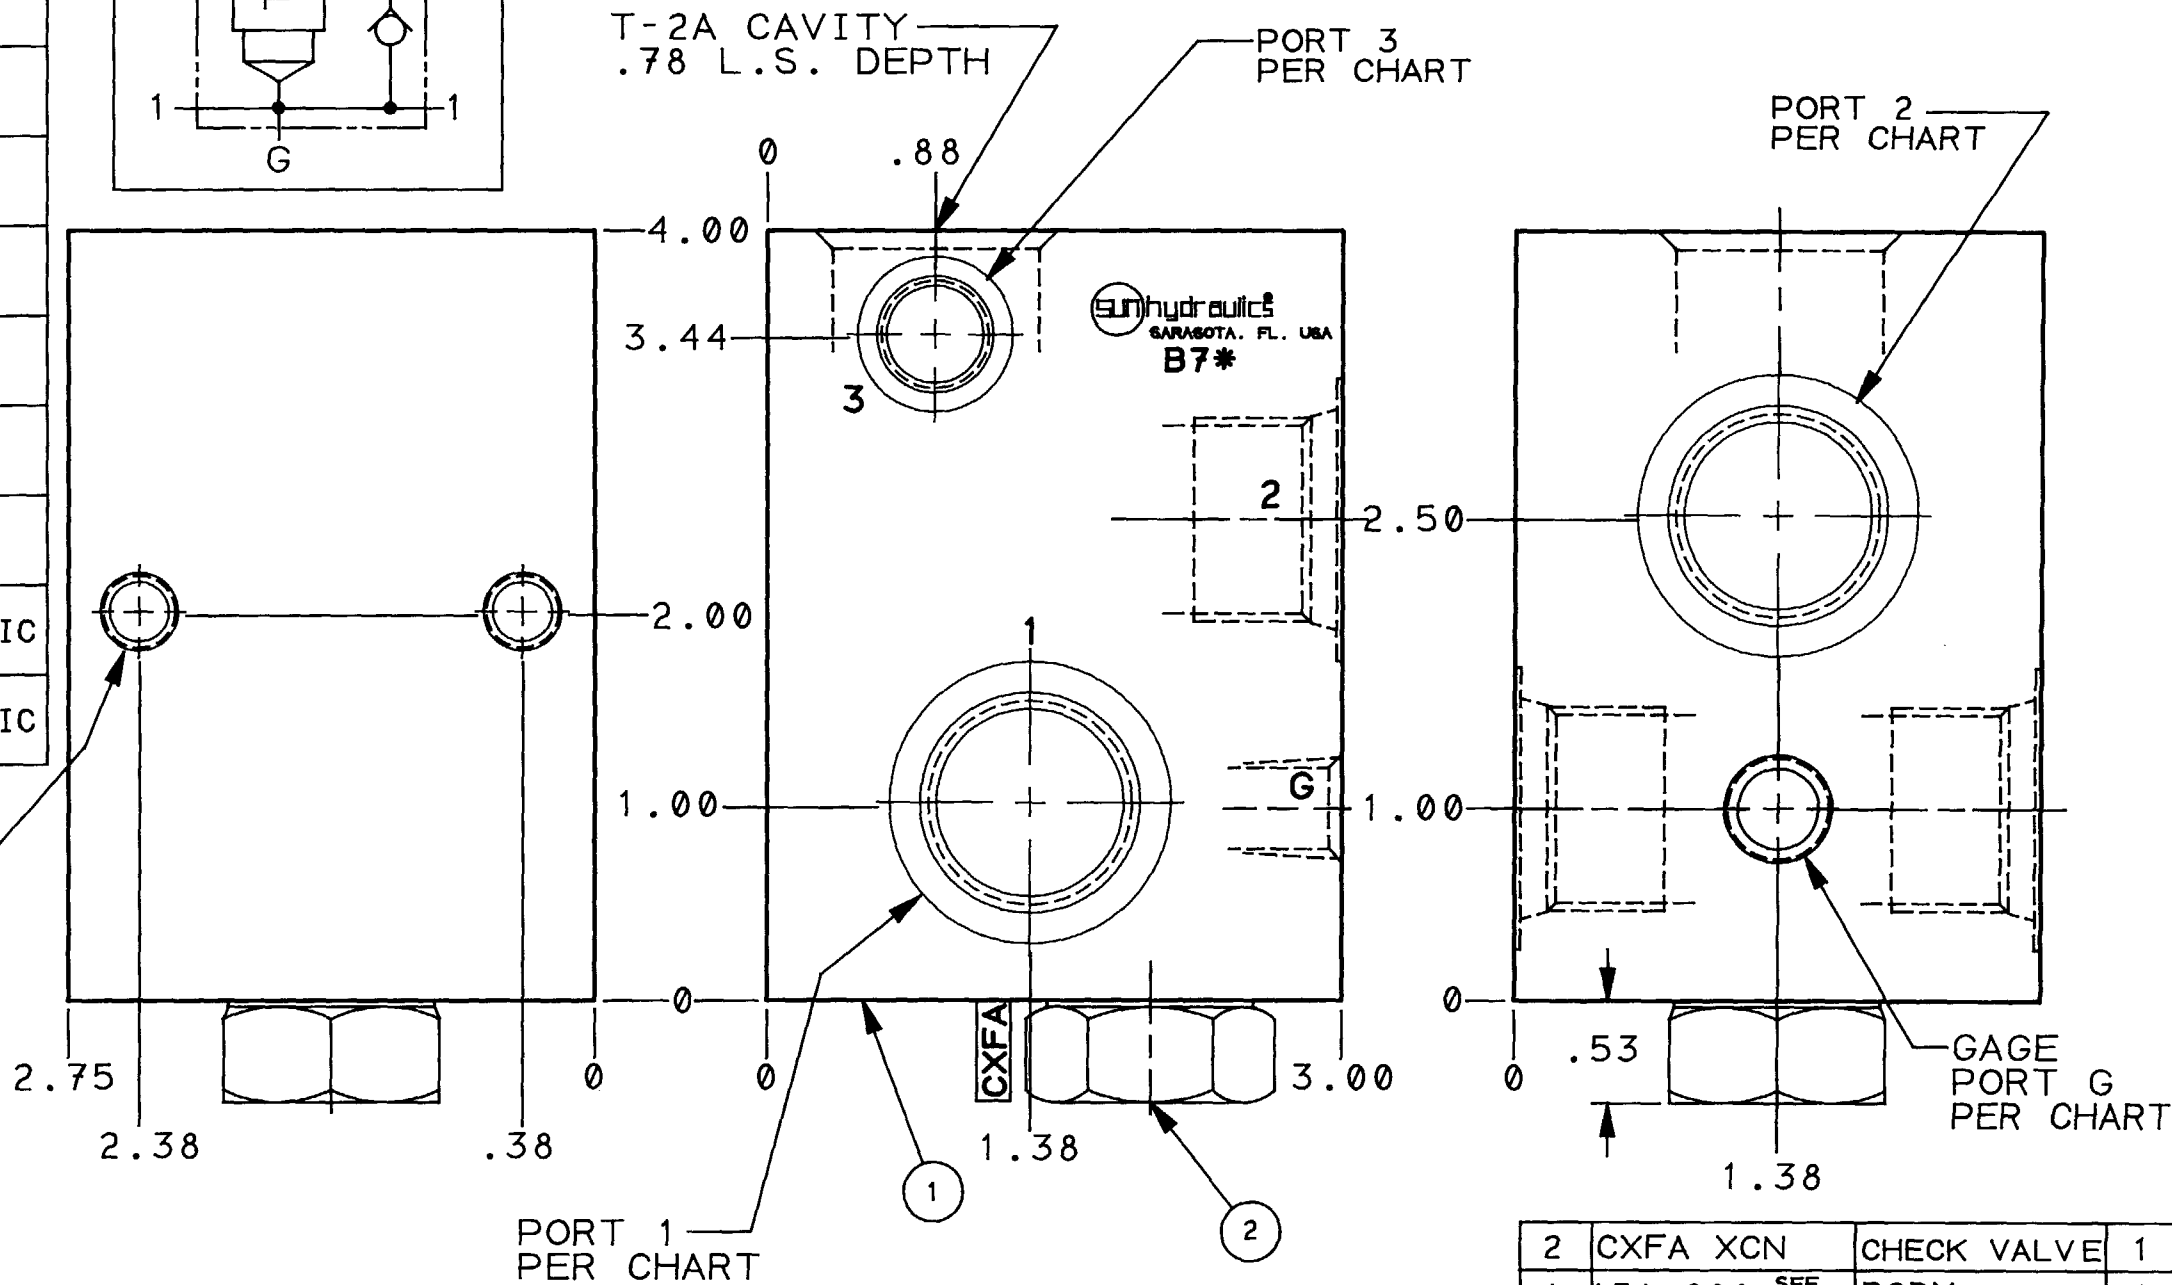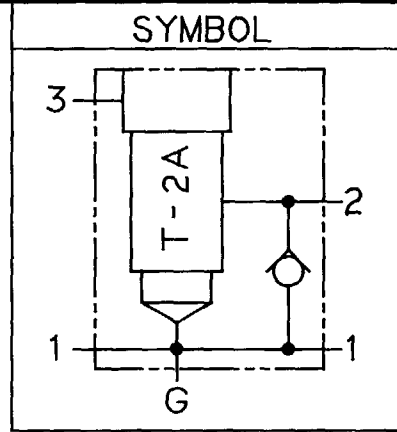

2	CXFA XCN	CHECK VALVE	1
1	151-088-SEE TABLE	BODY	1
ITEM	PART NO.	PART NAME	QTY

						UNLESS OTHERWISE SPECIFIED	TITLE T-2A CAVITY W/REVERSE FREE FLOW CHECK			REVISION	PART NO. B7*	
						DIMENSION TOL	SCALE	REF.	MATERIAL	 1500 UNIVERSITY PARKWAY SARASOTA, FLORIDA 34243, US TEL: 941-552-1983		
						.x = ±.030	1/1	YSEB	ALUM & STEEL			
						.xx = ±.015	DRAWN	CHECK	RELEASE			HEAT TREAT & FINISH
						.xxx = ±.005	BR5	R/B	2848			
						ANGLE TOL ±%	DATE	DATE	DATE			
LET	REVISION	DATE	DRN	CHK	REL	FINISH 80✓ REMOVE ALL BURRS	10-15-90	11-12-90	12-26-90			