REVISION	PART NO.
	BJ2

SYMBOL

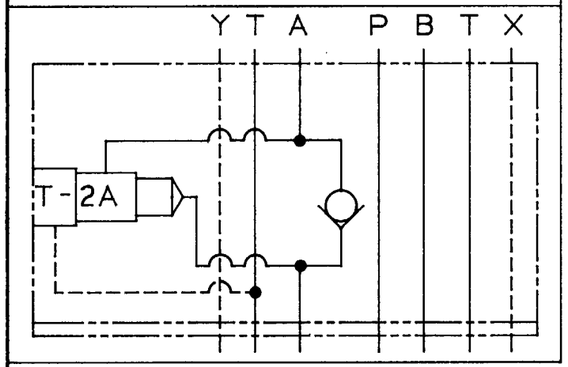

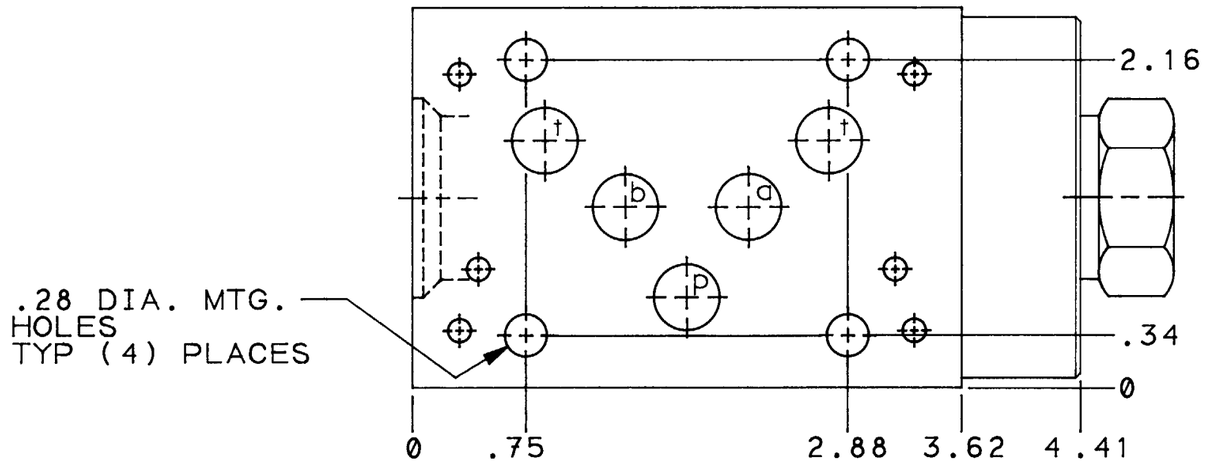

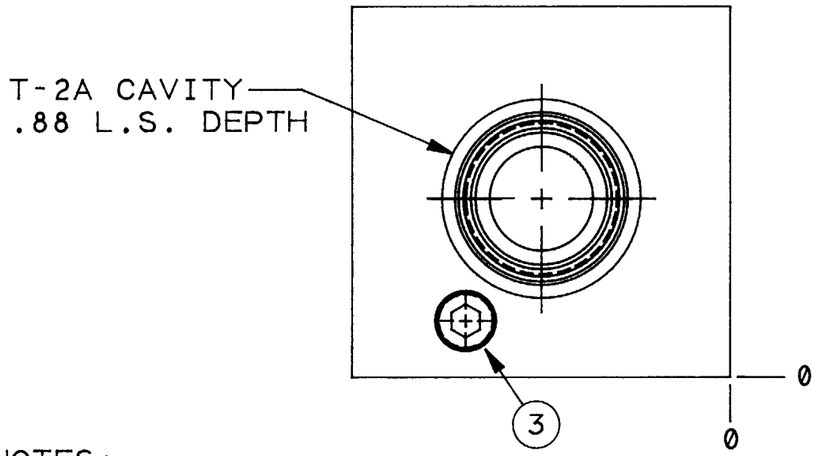

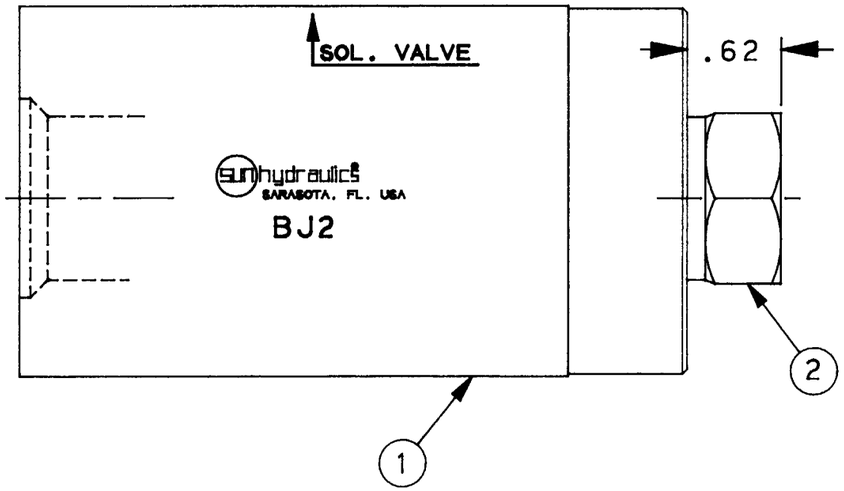

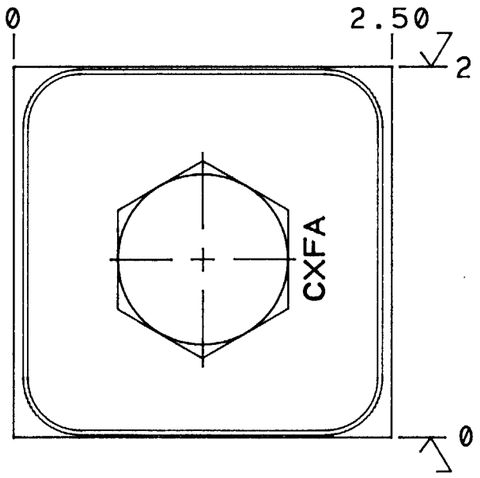

NOTES:

1) SEALS: BUNA-N
2) ALUMINUM BODIES-3000 PSI MAX. CONTINUOUS SERVICE PRESSURE.
3) CXFA XCN CARTRIDGE: CRACKING PRESSURE: 30 PSI ±3 CHECK SEAT: STEEL
4) ORDER SEAL KITS SEPARATELY. FOR (U.S.) USE 990-120-010 FOR (CETOP) USE 990-120-011

5) ORDERING INFO:
PBFB LAN BJ2:
└ CART. TO BE INSTALLED IN T-2A CAVITY. SEAL TYP IN PBFB DETERMINES ITEM 2 SEAL TYPE

ITEM	PART NO.	PART NAME	QTY
3	340-002	PIPE PLUG	1
2	CXFA XCN	CHECK VALVE	1
1	150-711	BODY	1

OUTLINE & ASSEM.

LET	REVISION	DATE	DRN	CHK	REL
-	REVISED ITEM 3 LOCATION.	2-21-92	BRS		

UNLESS OTHERWISE SPECIFIED
DIMENSION TOL
.x = ±.030
.xx = ±.015
.xxx = ±.005
ANGLE TOL ±½
FINISH 80√
REMOVE ALL BURRS

TITLE: 02H SANDWICH-W/REVERSE FF CHECK

SCALE	REF.	MATERIAL	HEAT TREAT & FINISH
1=1	YPEE LAN	ALUMINUM, STEEL & NOTED.	

DRAWN	CHECK	RELEASE
BRS	JLB	3211
DATE 7/30/91	DATE 8-1-91	DATE 8-5-91

REVISION	PART NO.
	BJ2

sun hydraulics® CORPORATION
1500 UNIVERSITY PARKWAY
SARASOTA, FLORIDA 34243, USA
TELEPHONE (813) 355-2983