REVISION	PART NO.
	BK5

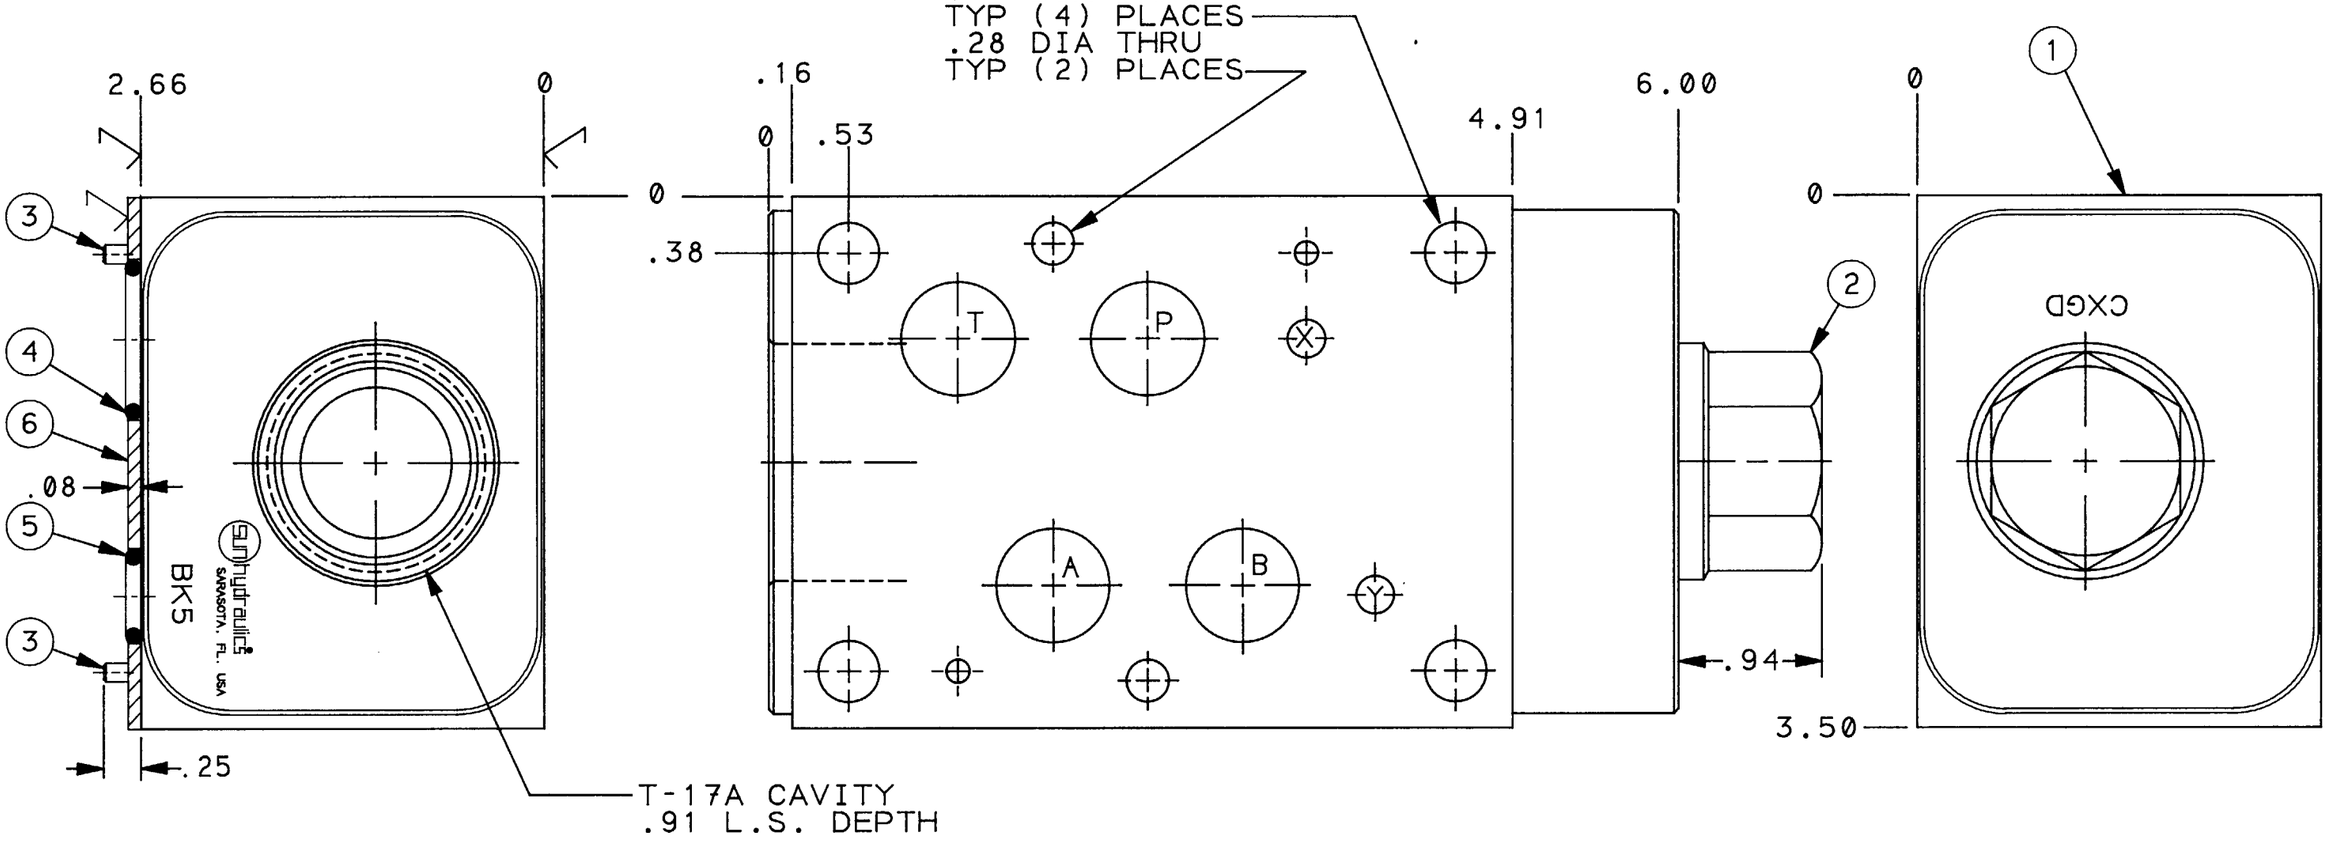

NOTES:

1) SEALS: BUNA-N
2) ALUMINUM BODIES-3000 PSI MAX. CONTINUOUS SERVICE PRESSURE.
3) CXGD XCN CARTRIDGE:
   CRACKING PRESSURE: 30 PSI ± 3
   CHECK SEAT: STEEL

4) ORDERING INFO:
   RSHC LAN BK5
   - CART. TO BE INSTALLED IN T-17A CAVITY. SEAL TYPE IN RSHC DETERMINES ITEM 2 SEAL TYPE

ITEM	PART NO.	PART NAME	QTY
6	700-006	SEAL PLATE	1
5	500-001-111	O RING	2
4	500-001-118	O RING	4
3	811-001-006	ROLL PIN	2
2	CXGD XCN	CHECK VALVE	1
1	151-145	BODY	1

SYMBOL

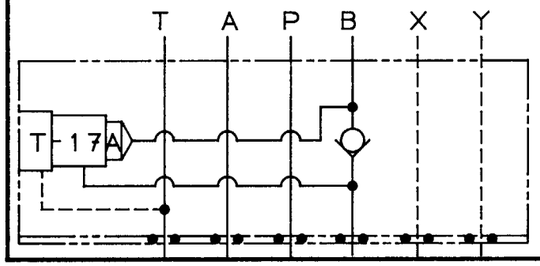

OUTLINE & ASSEM.

LET	REVISION	DATE	DRN	CHK	REL

UNLESS OTHERWISE SPECIFIED
DIMENSION TOL
.x = ±.030
.xx = ±.015
.xxx = ±.005
ANGLE TOL ±½°
FINISH 80✓
REMOVE ALL BURRS

TITLE ISO 07 SANDWICH- T-17A CAVITY ON "B" WITH REV. FREE FLOW CHECK.

SCALE	REF.	MATERIAL	
1:1	YSFC LAN	ALUM. & NOTED	STEEL

DRAWN	CHECK	RELEASE	HEAT TREAT & FINISH
BRS	JLB	3215	
DATE 7-31-91	DATE 8-2-91	DATE 8-7-91	

REVISION	PART NO.
	BK5

sun hydraulics CORPORATION
1500 UNIVERSITY PARKWAY
SARASOTA, FLORIDA 34243, USA
TELEPHONE (813) 355-2983