




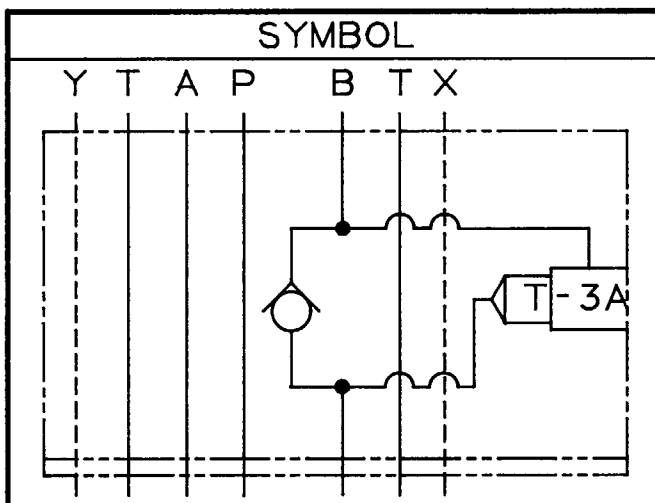

.28 DIA. MTG.
HOLES
TYP (4) PLACES

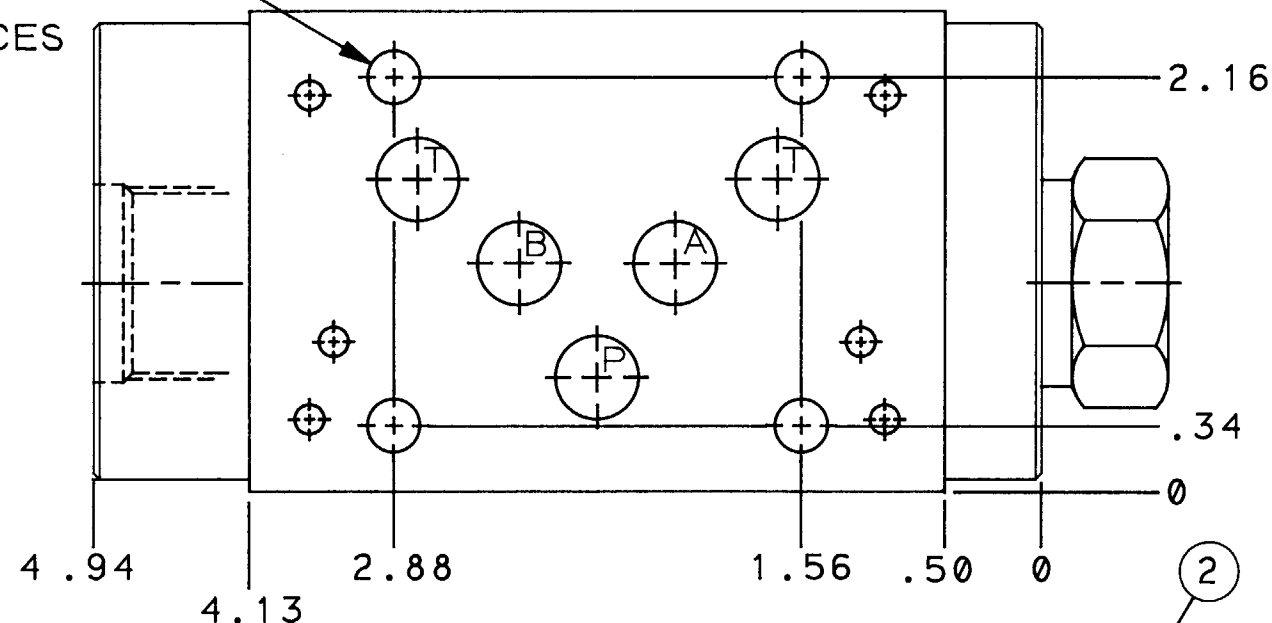



T-3A CAVITY
.03 L.S. DEPTH

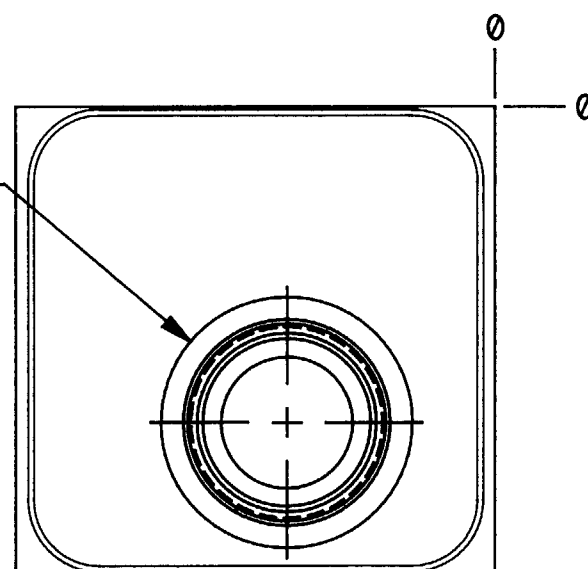

NOTES:

- 1) SEALS: BUNA-N
- 2) ALUMINUM BODIES-3000 PSI MAX. CONTINUOUS SERVICE PRESSURE.
- 3) CXFA XAN CARTRIDGE:
CRACKING PRESSURE: 4 PSI $\pm$ 1
CHECK SEAT: STEEL
- 4) INSTALLATION REQUIRES SEAL KIT:
990-120-010 FOR D02H(U.S.)
990-120-011 FOR D02H(CETOP)
- 5) ORDERING INFO:
RDFA LAN CJ5:

CART. TO BE INSTALLED
IN T-3A CAVITY. SEAL
TYP IN RDFA DETERMINES
ITEM 2 SEAL TYPE

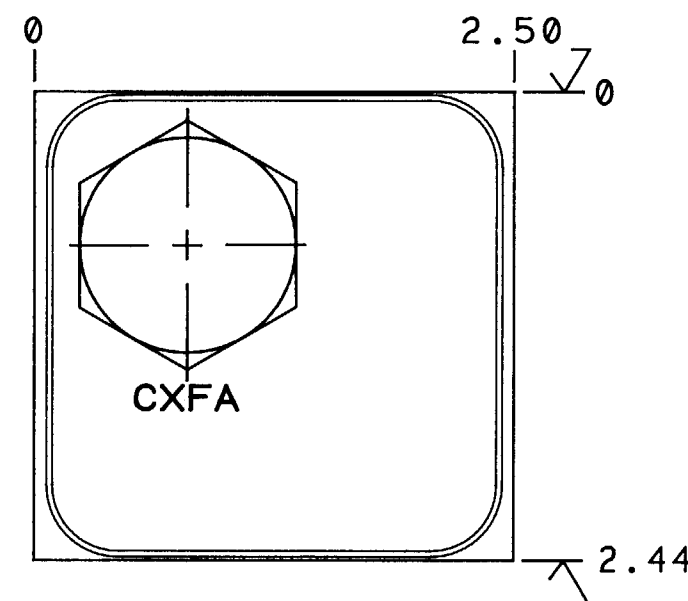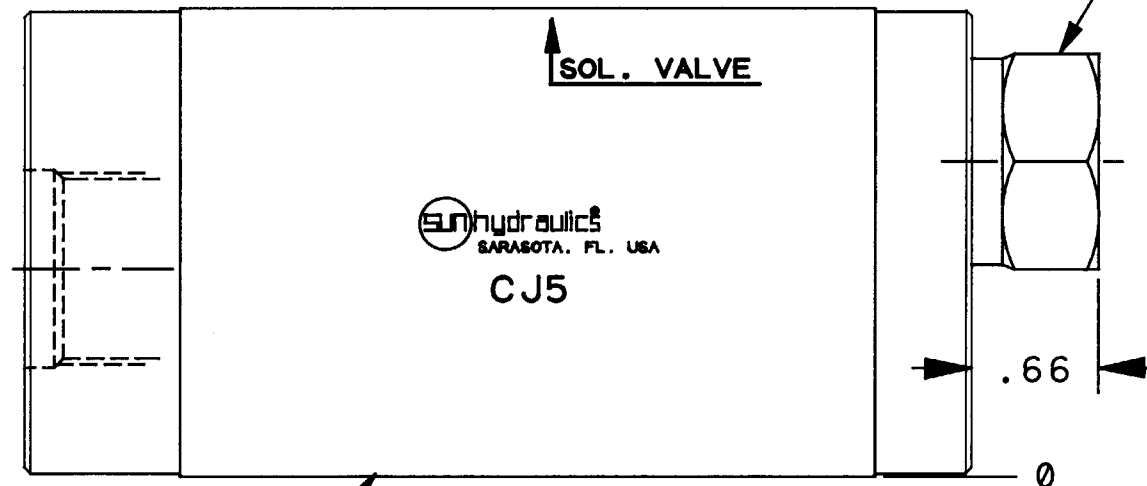

2	CXFA XAN	CHECK VALVE	1
1	151-506	BODY	1
ITEM	PART NO.	PART NAME	QTY

					UNLESS OTHERWISE SPECIFIED					TITLE 02H SANDWICH-W/REVERSE FF CHECK					REVISION		PART NO. CJ5		
					DIMENSION TOL					SCALE REF.					MATERIAL ALUMINUM, STEEL & NOTED.				
					.x = ±.030					1 = 1					YCFN LAN				
					.xx = ±.015														
					.xxx = ±.005					DRAWN					CHECK				
					ANGLE TOL ± 1/2°					BRS					JLB				
					FINISH 80✓										RELEASE				
					REMOVE ALL BURRS					DATE					DATE				
										7/30/91					8-1-91				
															DATE				
															8-5-91				