


MODEL NO.	TH'D TYPE	PORTS 1 & 2	PORT 3	PORT G	BODY DASH NO. ITEM 1
E5B	INCH	.375-18 NPTF	.375-18 NPTF	.250-18 NPTF	-001
E5C	INCH	.500-14 NPTF	.375-18 NPTF	.250-18 NPTF	-002
E5J	INCH	SAE-8	SAE-8	.250-18 NPTF	-003
E5K	INCH	SAE-10	SAE-8	.250-18 NPTF	-004
E5U	METRIC	.375-19 BSPP	.375-19 BSPP	.250-19 BSPP	-005
E5V	METRIC	.500-14 BSPP	.375-19 BSPP	.250-19 BSPP	-006

SYMBOL

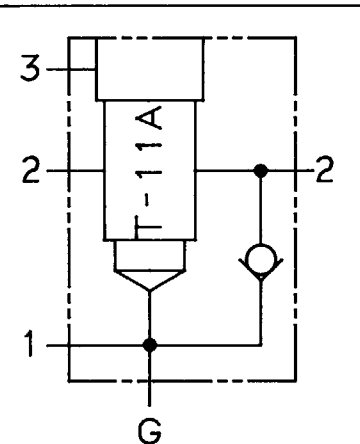


PORT 1 PER
CHART

NOTES :

1. SEALS: BUNA-N
2. ALUMINUM BODIES-3000
PSI MAXIMUM CONTINUOUS
SERVICE PRESSURE.
3. CXCD XCN CARTRIDGE:
CRACKING PRESSURE: 30 PSI ±3
CHECK SEAT: STEEL
4. ORDERING INFO:
PPDB LAN E5*

MAIN PORT DESIGNATION

-CART. TO BE INSTALLED IN T-11A
CAVITIES. SEAL TYPE IN PPDB
DETERMINES ITEM 2 SEAL TYPE

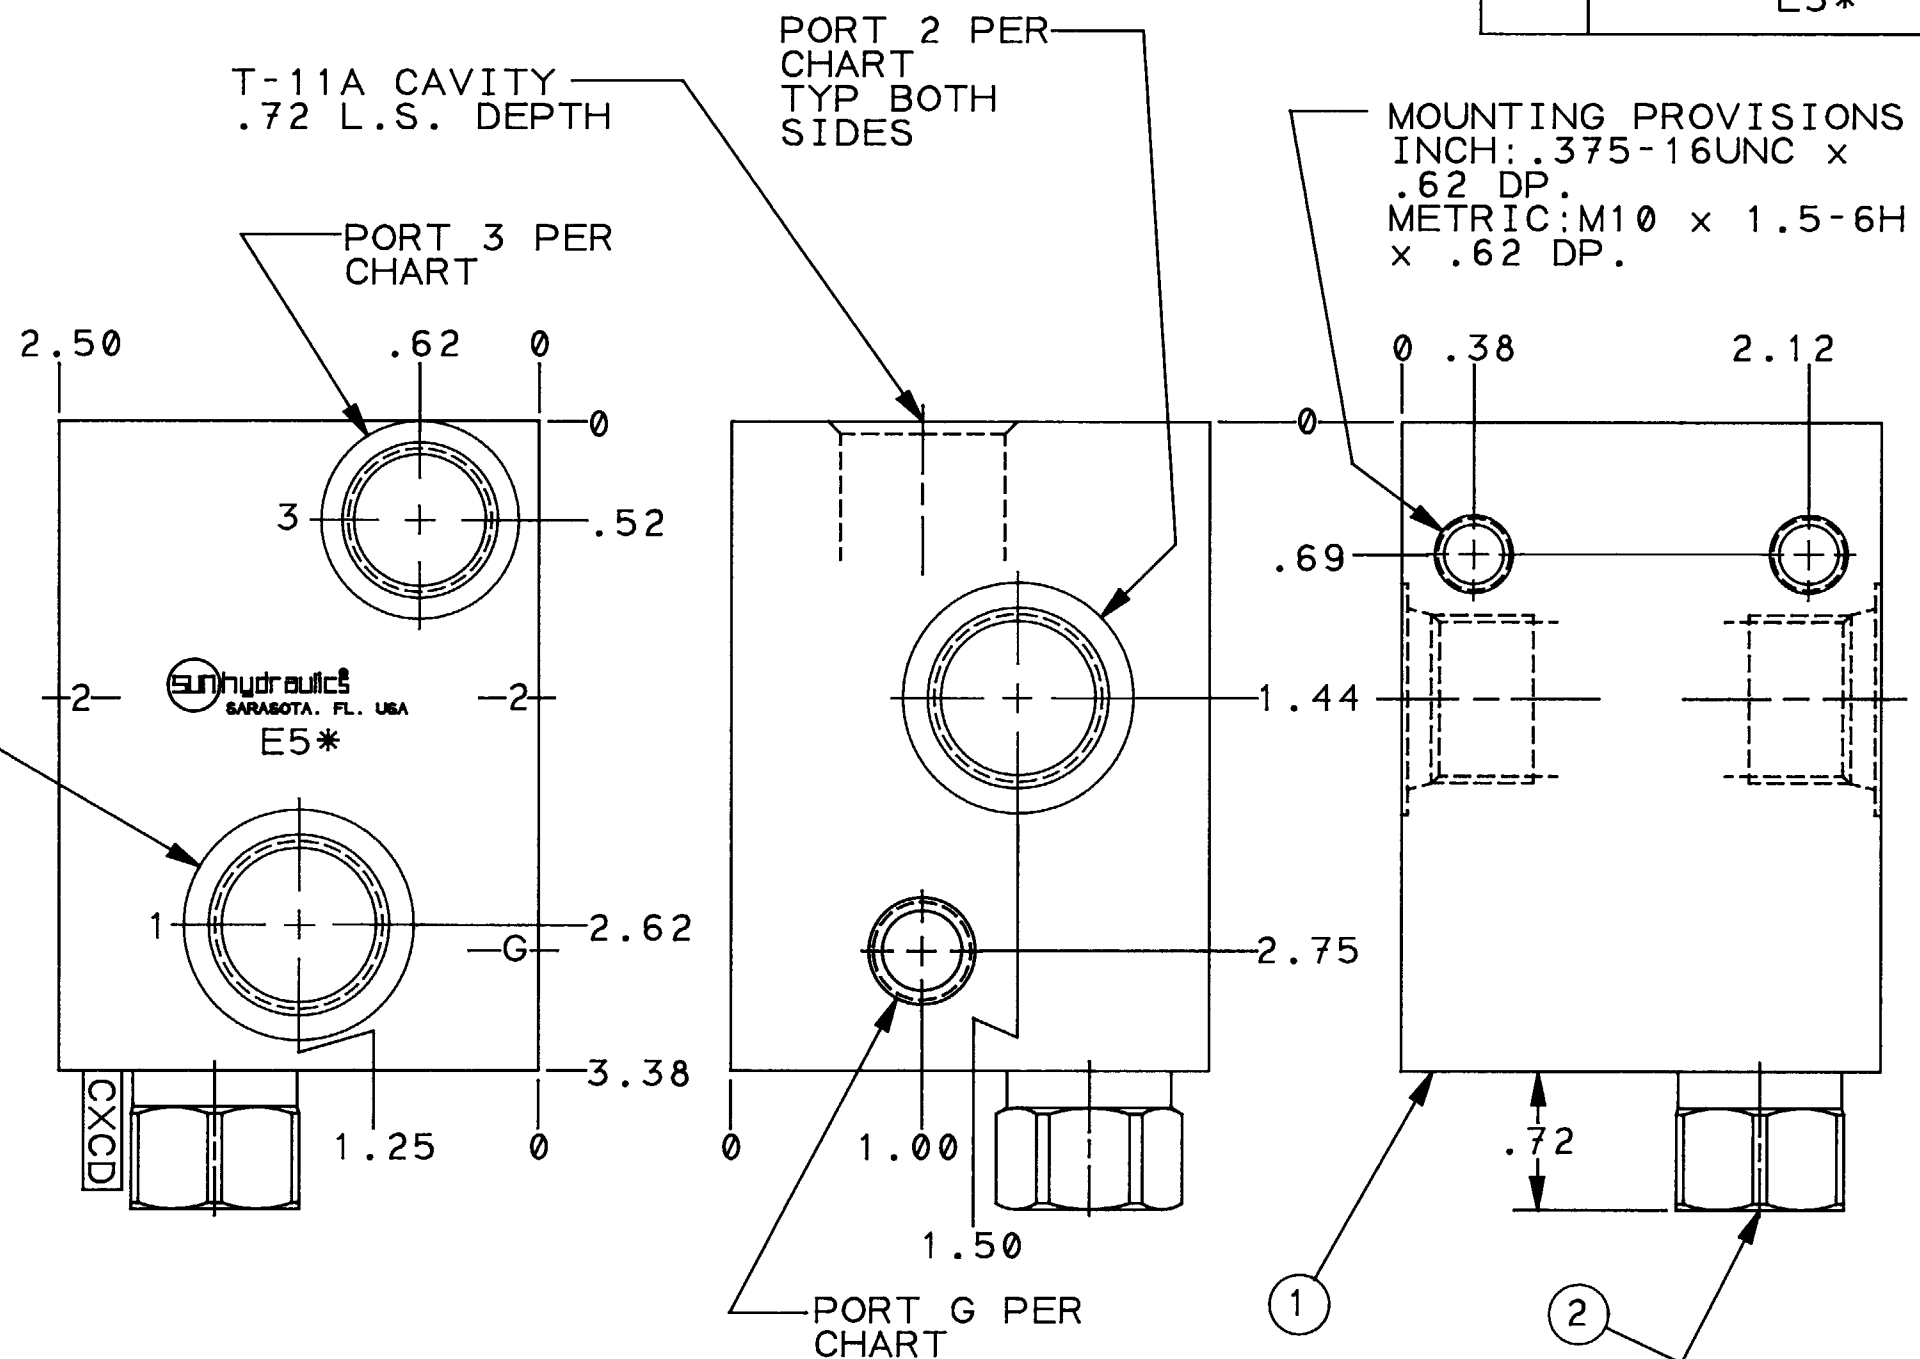

2	CXCD XCN	CHECK VALVE	1
1	151-199- ^{SEE} TABLE	BODY	1
ITEM	PART NO.	PART NAME	QTY

[illegible]