

CHART A (PORT OPTIONS)				
MODEL NUMBER	PORT G	PORTS 1 & 2	PORT 3	BODY DASH NO ITEM 1
H7D	.250-18 NPTF	.750-14 NPTF	.250-18 NPTF	-001
H7E	.250-18 NPTF	1.00-11.5 NPTF	.250-18 NPTF	-002
H7F	.250-18 NPTF	1.25-11.5 NPTF	.250-18 NPTF	-003
H7L	.250-18 NPTF	SAE-12	SAE-6	-004
H7M	.250-18 NPTF	SAE-16	SAE-6	-005
H7N	.250-18 NPTF	SAE-20	SAE-6	-006
H7W	.250-19 BSPP	.750-14 BSPP	.250-19 BSPP	-007
H7X	.250-19 BSPP	1.00-11 BSPP	.250-19 BSPP	-008
H7Y	.250-19 BSPP	1.25-11 BSPP	.250-19 BSPP	-009


INCH: .375-16UNC X
.62 DP.
METRIC: M10 x 1.5-6H
x .62 DP.
TYP (2) PLACES

NOTES:

1. SEALS: BUNA-N
2. ALUMINUM BODIES-3000
PSI MAXIMUM CONTINUOUS
SERVICE PRESSURE.
3. CXHA XCN CARTRIDGE:
CRACKING PRESSURE: 30 PSI ±3
CHECK SEAT: STEEL
4. ORDERING INFO:
RSHC LAN H7*

MAIN PORT DESIGNATION

CART. TO BE INSTALLED IN T-17A
CAVITIES. SEAL TYPE IN RSHC
DETERMINES ITEM 2 SEAL TYPE

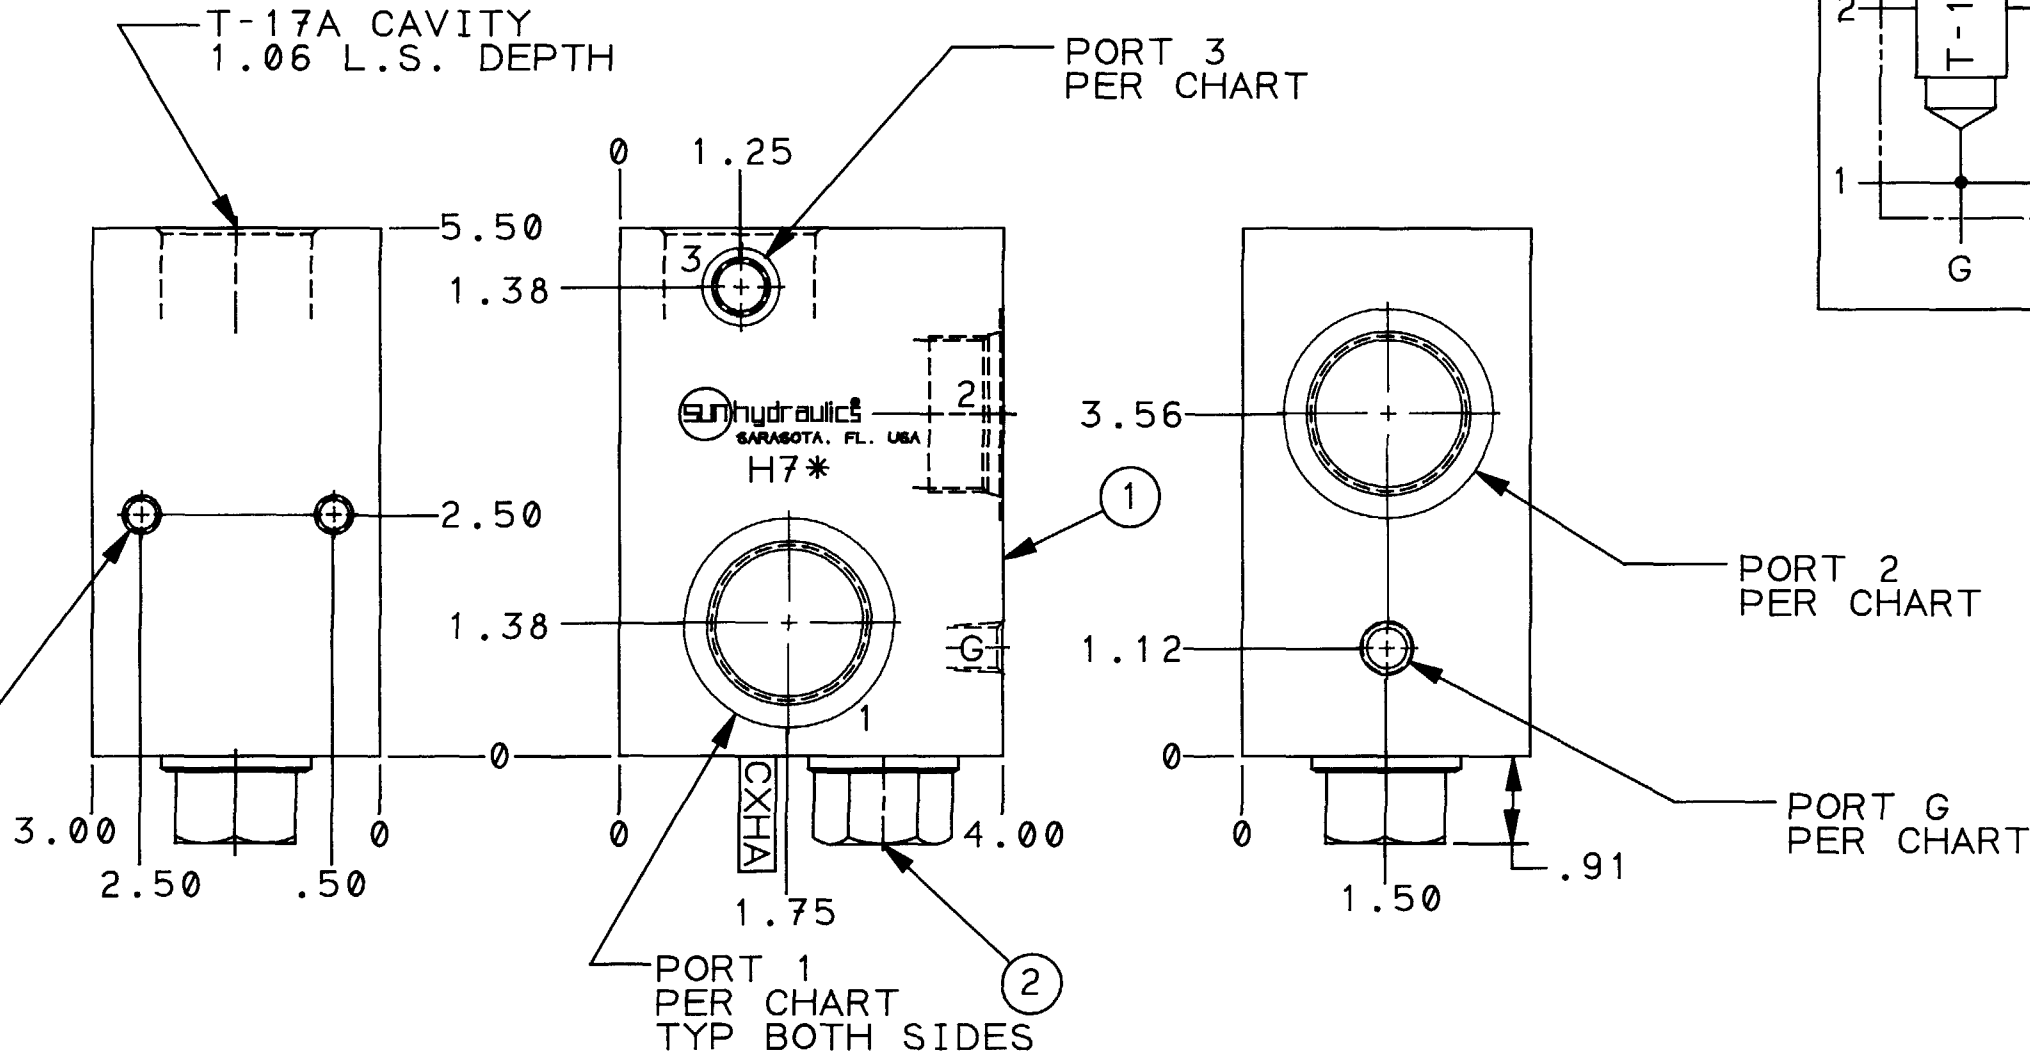

REVISION	PART NO.	H7*
SYMBOL		
3	2	1
1	2	1
		G

1. SEALS: BUNA-N
2. ALUMINUM BODIES-3000
PSI MAXIMUM CONTINUOUS
SERVICE PRESSURE.
3. CXHA XCN CARTRIDGE:
CRACKING PRESSURE: 30 PSI ±3
CHECK SEAT: STEEL
4. ORDERING INFO:
RSHC LAN H7*

MAIN PORT DESIGNATION

CART. TO BE INSTALLED IN T-17A
CAVITIES. SEAL TYPE IN RSHC
DETERMINES ITEM 2 SEAL TYPE

OUTLINE & ASSEMBLY					REVISION	PART NO.	H7*
TITLE T-17A CAVITY WITH REVERSE FREE FLOW							
SCALE REF. 1/2 YSHB LAN					MATERIAL ALUM & STEEL		
DRAWN BR5					HEAT TREAT & FINISH		
DATE 10-24-90					DATE 11-12-90		
DATE 1-18-91					DATE 1-18-91		
UNLESS OTHERWISE SPECIFIED					DIMENSION TOL		
					.x = ±.030		
					.xx = ±.015		
					.xxx = ±.005		
					ANGLE TOL ±1/2		
					FINISH 80✓		
					REMOVE ALL BURRS		
LET	REVISION	DATE	DRN	CHK	REL		

SUN hydraulics
CORPORATION
1500 UNIVERSITY PARKWAY
SARASOTA, FLORIDA 34243, US
TELEPHONE (813) 355-2983