SYMBOL





CHART A
(PORT OPTIONS)

MODEL NUMBER	PORT G	PORTS 1 & 2	BODY DASH NO ITEM 1	TH'D TYPE
LND	.250-18 NPTF	.750-14 NPTF	-001	INCH
LNE	.250-18 NPTF	1.00-11.5 NPTF	-002	INCH
LNF	.250-18 NPTF	1.25-11.5 NPTF	-003	INCH
LNL	.250-18 NPTF	SAE-12	-004	INCH
LNM	.250-18 NPTF	SAE-16	-005	INCH
LNN	.250-18 NPTF	SAE-20	-006	INCH
LNW	.250-19 BSPP	.750-14 BSPP	-007	METRIC
LNX	.250-19 BSPP	1.00-11 BSPP	-008	METRIC
LNY	.250-19 BSPP	1.25-11 BSPP	-009	METRIC

NOTES:

1. SEALS: BUNA-N
2. ALUMINUM BODIES-3000 PSI MAXIMUM CONTINUOUS SERVICE PRESSURE.
3. CXJA XAN CARTRIDGE: CRACKING PRESS.: 4 PSI ±1 CHECK SEAT: STEEL

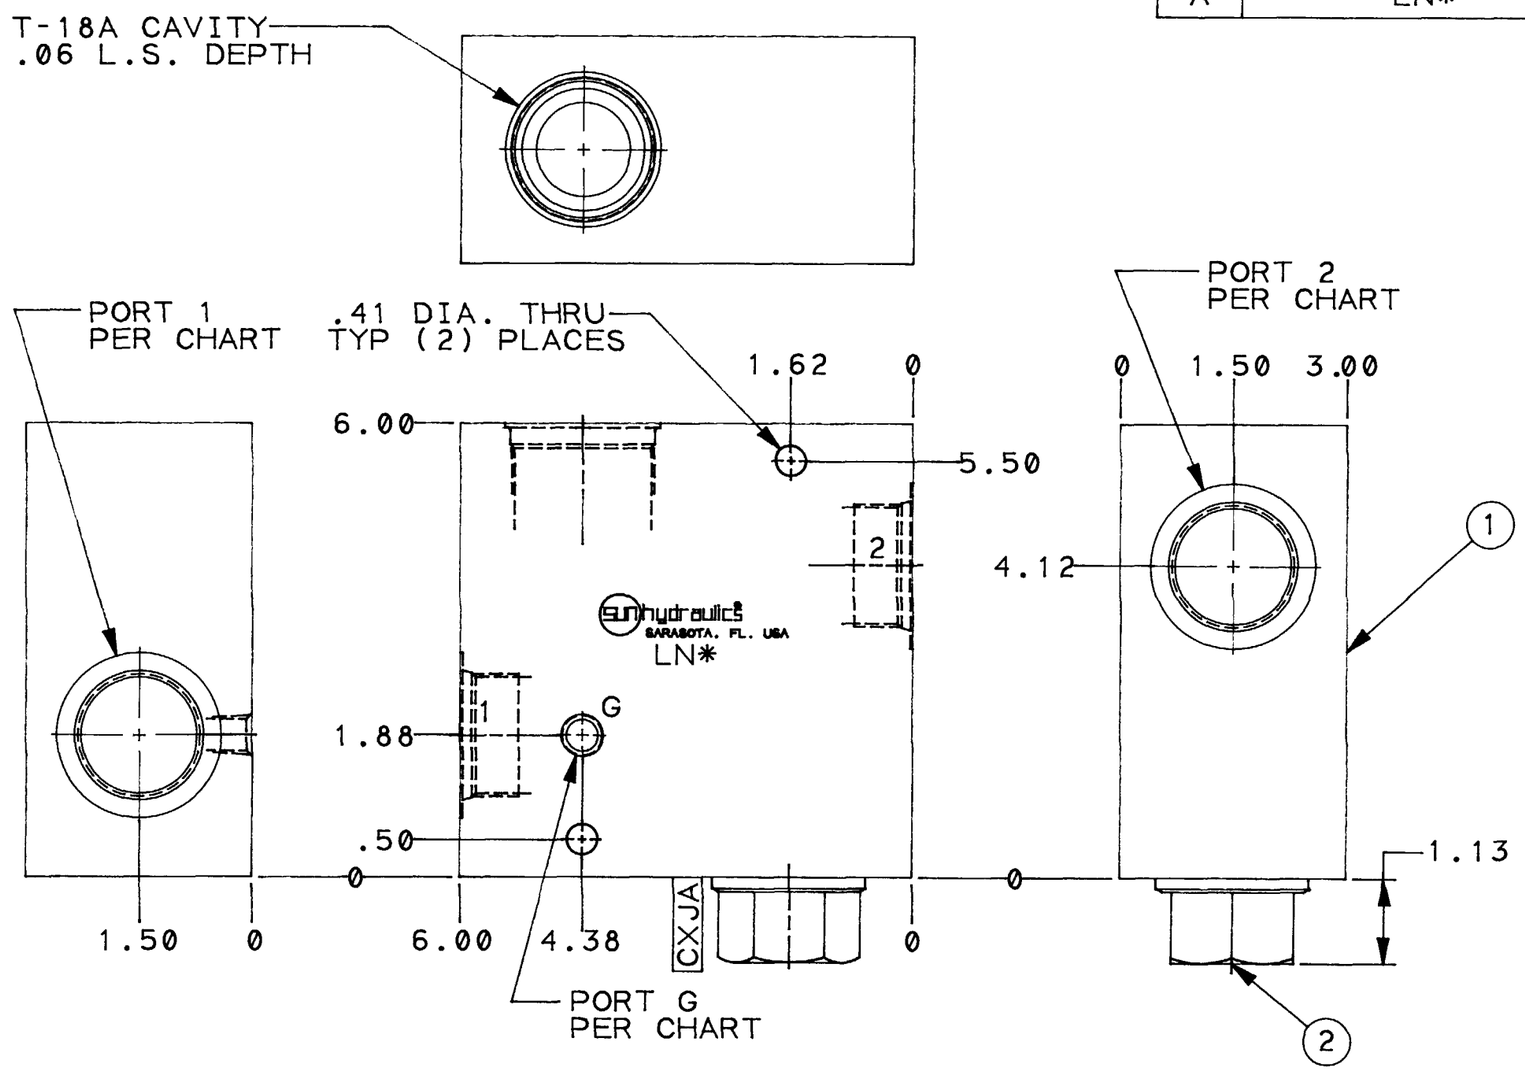

ITEM	PART NO.	PART NAME	QTY
2	CXJA XAN	CHECK VALVE	1
1	151-922-SEE TABLE	BODY	1

OUTLINE & ASSEMBLY

REVISION	PART NO.
A	LN*

LET	REVISION	DATE	DRN	CHK	REL
A	ITEM 2 WAS CXJA XCN.	5-7-92	BRS		3691

UNLESS OTHERWISE SPECIFIED
DIMENSION TOL
.x = ±.030
.xx = ±.015
.xxx = ±.005
ANGLE TOL ±½
FINISH 80√
REMOVE ALL BURRS

TITLE T-18A CAV.W/REVERSE FF CHECK-USE W/RELIEF VALVE

SCALE	REF.	MATERIAL
1/2		ALUMINUM

DRAWN	CHECK	RELEASE	HEAT TREAT & FINISH
BRS	JLB	2899	
DATE 10-31-90	DATE 1-2-91	DATE 1-22-91	

SUN hydraulics CORPORATION
1500 UNIVERSITY PARKWAY
SARASOTA, FLORIDA 34243, US
TELEPHONE (813) 355-2983