



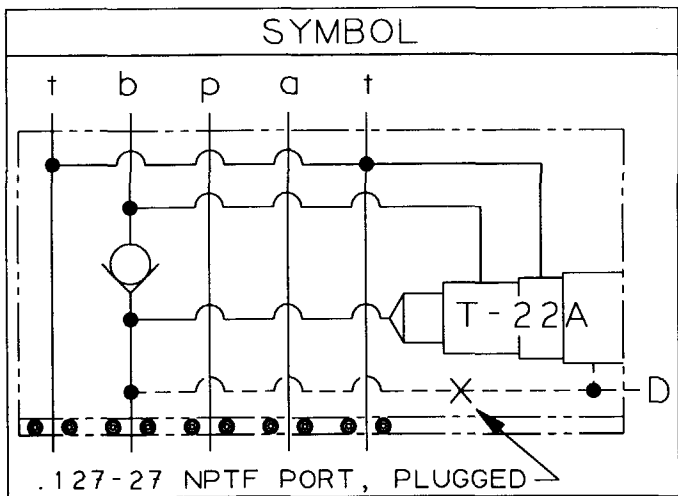

T-22A CAVITY
1.31 L.S.
DEPTH


DRAIN PORT
SEE CHART

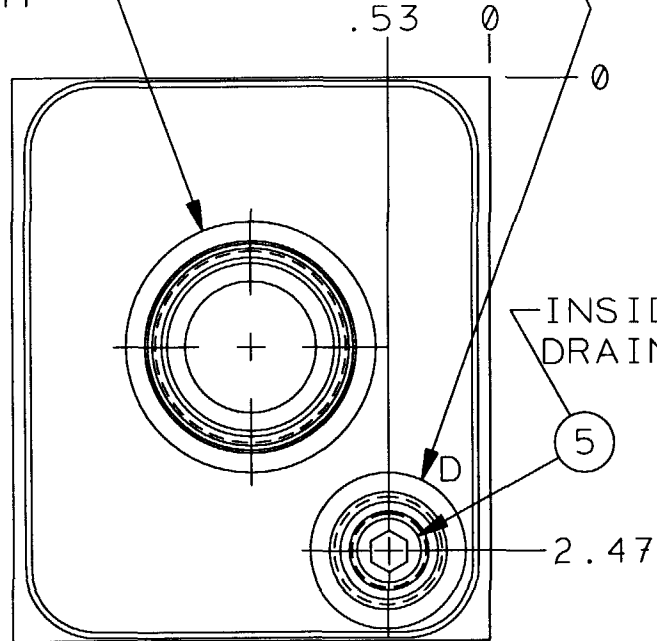

NOTES:

- 1) SEALS: BUNA-N
- 2) ALUMINUM BODIES-3000 PSI
MAXIMUM CONTINUOUS SERVICE
PRESSURE.
- 3) CXFA XCN CARTRIDGE:
CRACKING PRESSURE: 30 PSI $\pm$ 3
CHECK SEAT: STEEL
- 4) ORDERING INFO:
PVFA LAN NB3

CART. TO BE INSTALLED IN
T-22A CAV. SEAL TYPE IN PVFA
DETERMINES ITEM 3 SEAL TYPE

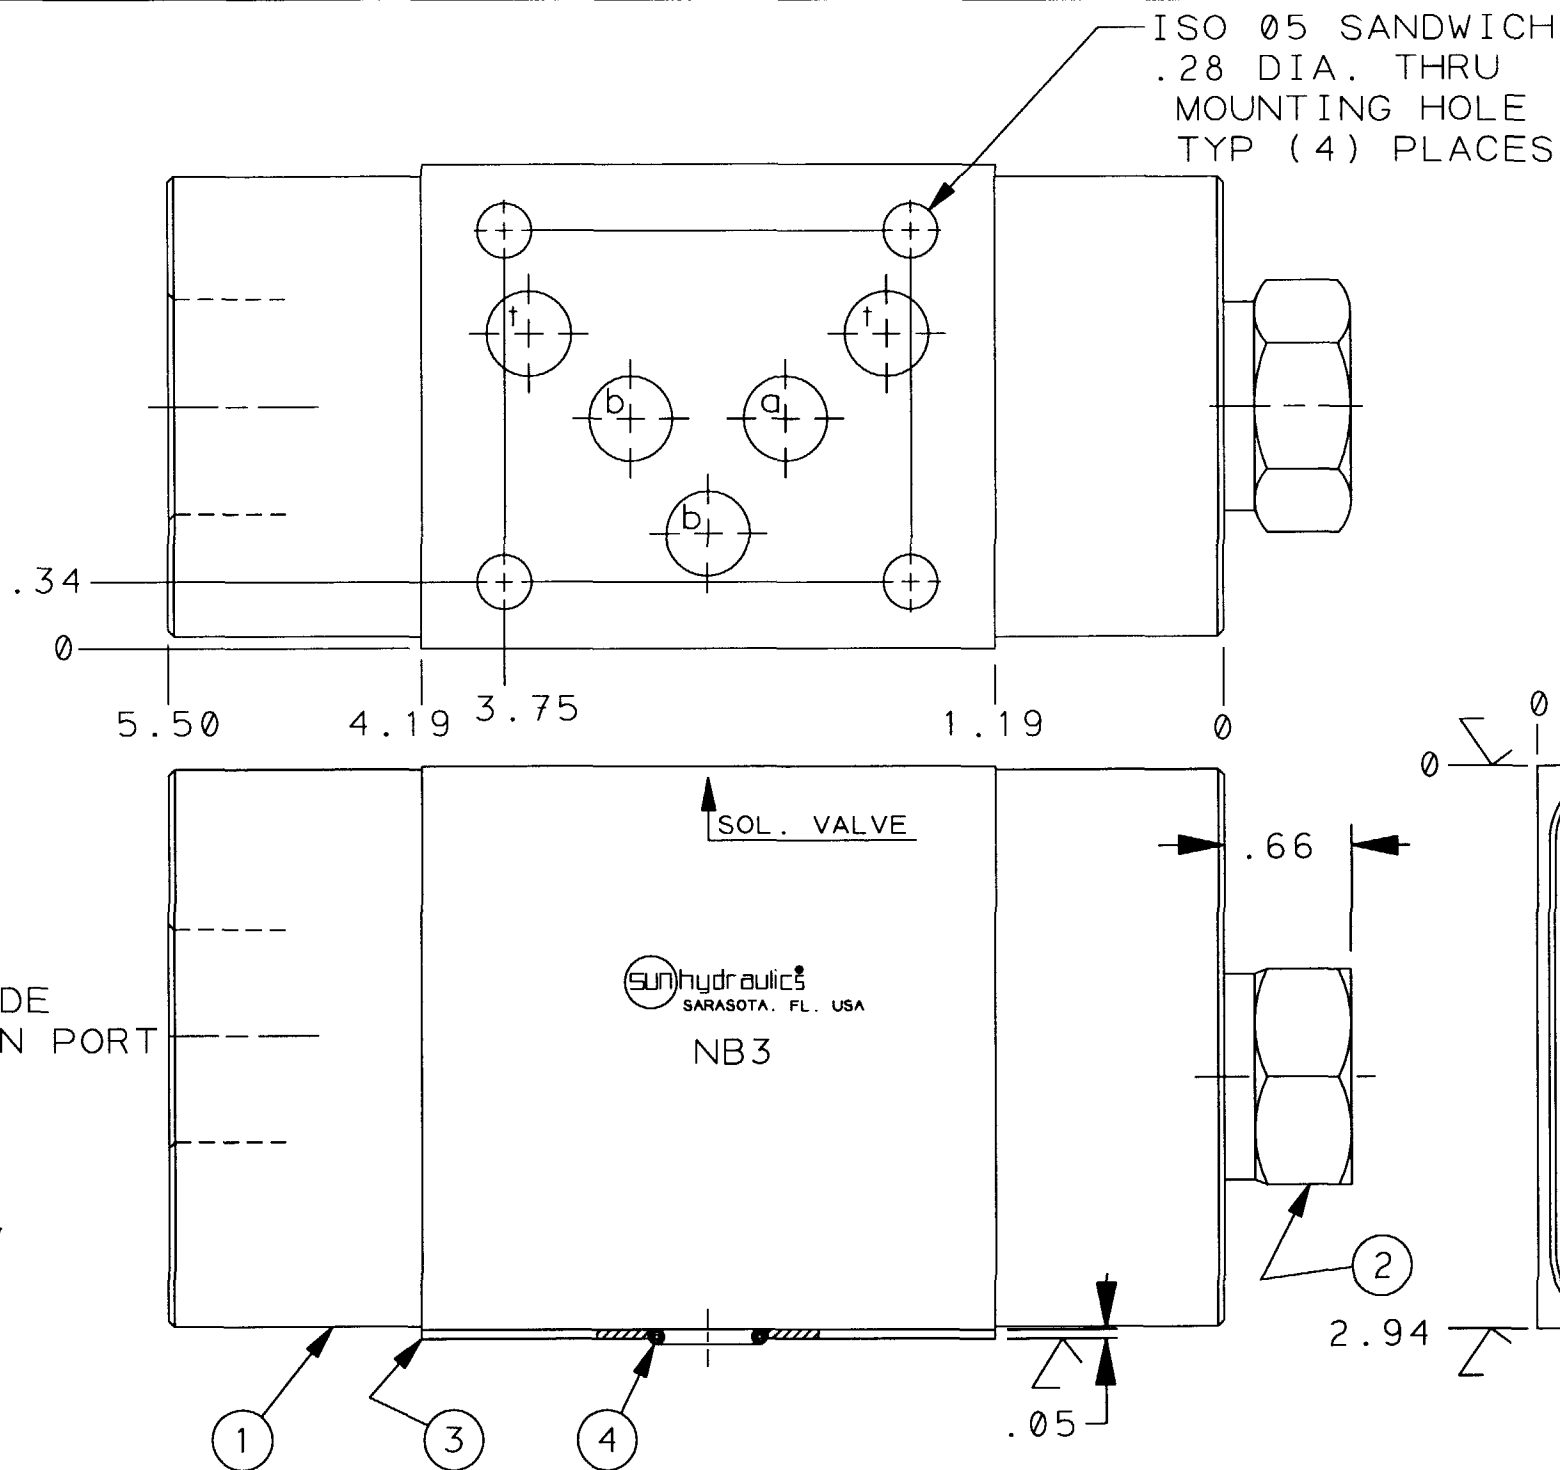

REVISION A		PART NO. NB3	
MODEL NUMBER	BODY DASH No.	DRAIN PORT "D"	
NB3	-001	SAE-6	
NB3/M	-002	.250-19 BSPP	

5	340-002	PIPE PLUG	1
4	500-001-014	"O"RING	5
3	700-001	SEAL PLATE	1
2	CXFA XCN	CHECK VALVE	1
1	152-267-SEE CHART	BODY	1
ITEM	PART NO.	PART NAME	QTY

UNLESS OTHERWISE SPECIFIED			
DIMENSION TOL			
.x = $\pm$.030			
.xx = $\pm$.015			
.xxx = $\pm$.005			
ANGLE TOL $\pm$ 1/2			
FINISH 80 $\sqrt$			
REMOVE ALL BURRS			
A	REDESIGNED TO ADD ITEM 5 INTERNALLY	26AUG93	DAS
LET	REVISION	DATE	DRN CHK REL

OUTLINE & ASSEM.

TITLE ISO 05 SANDWICH- B W/REVERSE FF CHECK		
SCALE REF.	MATERIAL ALUMINUM, STEEL & NOTED	
1 = 1	HEAT TREAT & FINISH	
DRAWN BRS	CHECK JLB	RELEASE 3166
DATE 7-2-91	DATE 7-5-91	DATE 7-8-91

REVISION A	PART NO. NB3
1500 UNIVERSITY PARKWAY SARASOTA, FLORIDA 34243, USA TELEPHONE (813) 355-2983	