


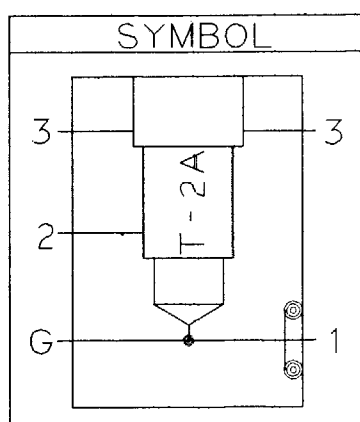


PORT OPTIONS				
MODEL NO.	BODY DASH NO. (ITEM 1)	PORT 3	PORT G	TH'D TYPE
WBM	-001	SUN STD SAE-6	.250-18 NPTF	INCH
WBM/M	-003	.250-19 BSPP	.250-19 BSPP	METRIC

REVISION	PART NO.
	WBM

NOTES:


- 1) SEALS: BUNA-N
- 2) ALUMINUM BODIES: 3000 PSI MAX. CONTINUOUS SERVICE PRESSURE
- 3) FOR OTHER OPTIONS, SEE CATALOG

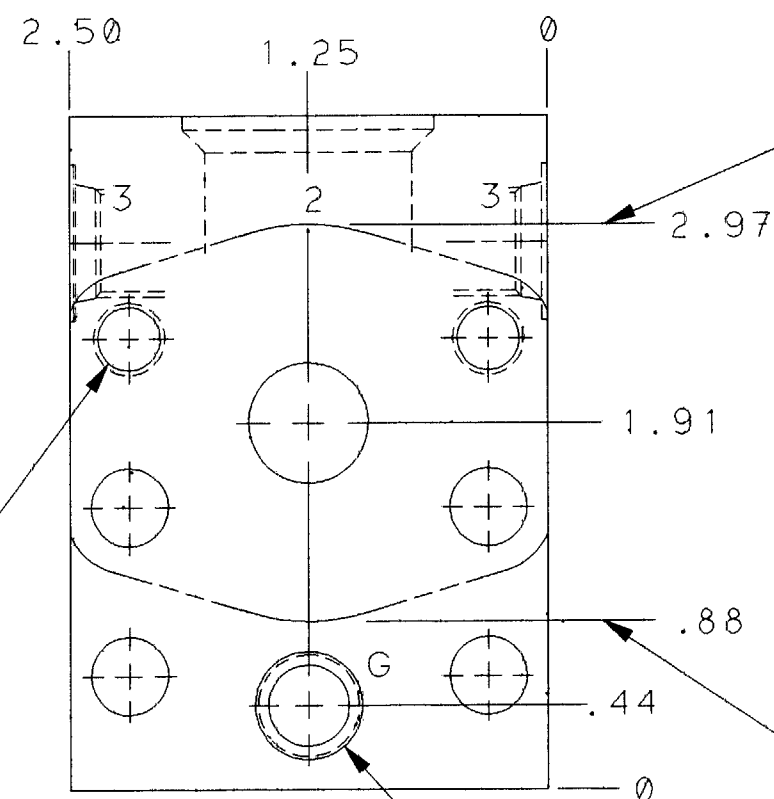


INCH:
.375-16UNC x .88 DP.
TYP (2) PLACES
METRIC:
M10x1.5-6H x .88 DP.
TYP (2) PLACES

GAGE PORT
PER CHART

DO NOT STAMP
BETWEEN THESE LINES

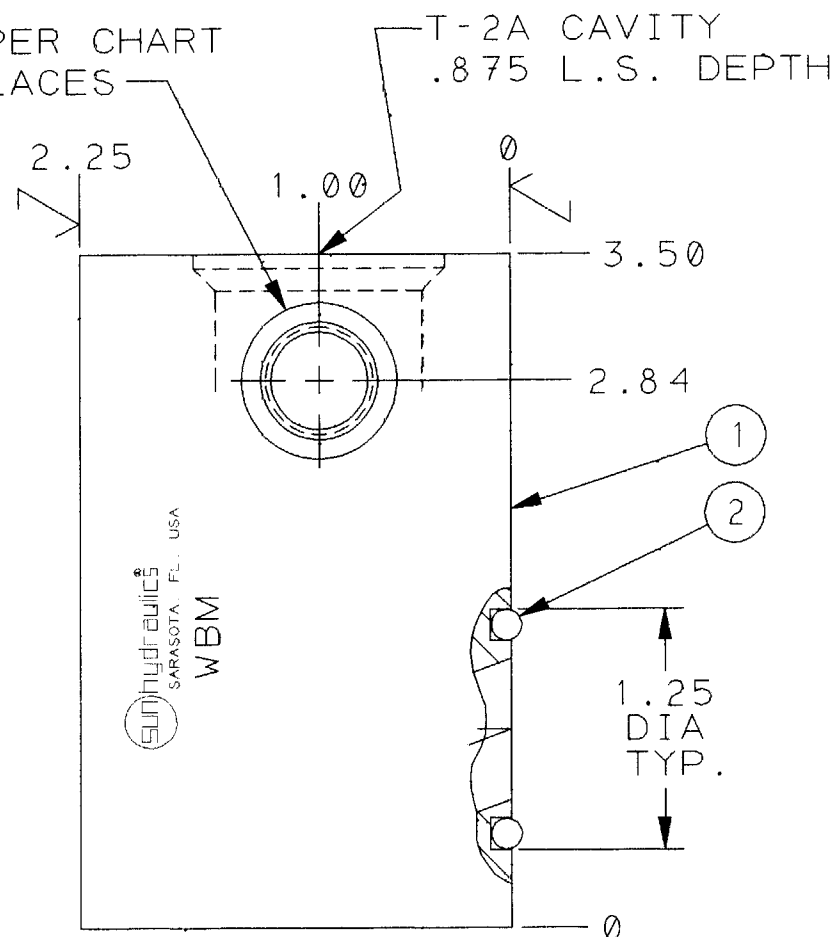

.75 DIA SAE CODE 61
4-BOLT FLANGE PATTERN
TYP (2) PLACES

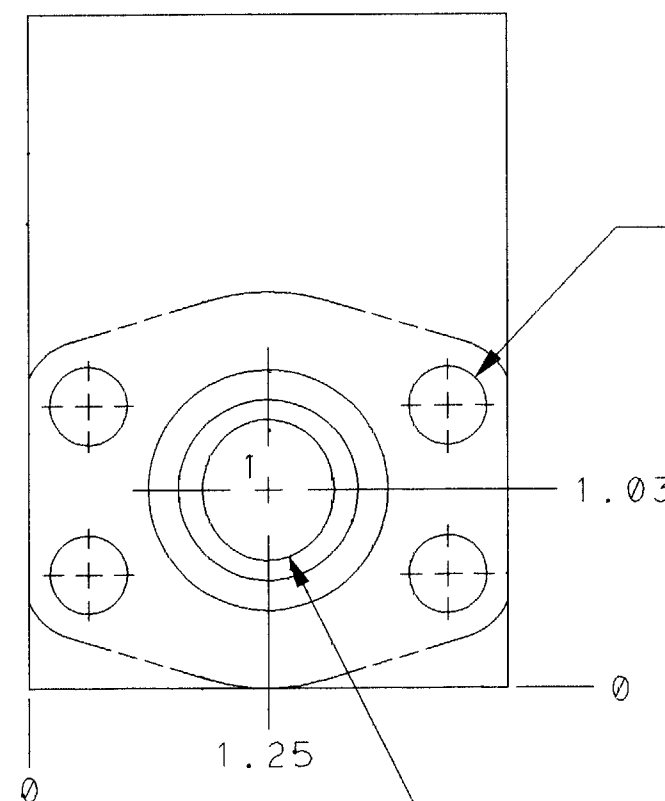

INCH:
.41 DIA THRU
TYP (4) PLACES
METRIC:
.42 DIA THRU
TYP (4) PLACES

2	500-001-214	"O" RING	1
1	152-867-***	BODY	1
ITEM	PART NO.	PART NAME	QTY

								UNLESS OTHERWISE SPECIFIED		TITLE BODY-DIRECT .75 CODE 61 FLANGE MOUNTED T-2A CAVITY W/GAGE PORT			REVISION		PART NO. WBM		
								DIMENSION TOL		SCALE REF.		MATERIAL			 SUN hydraulics [®] CORPORATION 1500 UNIVERSITY PARKWAY SARASOTA, FLORIDA 34243, USA TELEPHONE (813) 355-2983		
								.x = ±.030		1:1		ALUMINUM					
								.xx = ±.015		DRAWN		CHECK		RELEASE			
								.xxx = ±.005		DATE		DATE		DATE			
								ANGLE TOL ± 1/2		DAS		3741		HEAT TREAT & FINISH			
								FINISH 80✓		DATE		DATE		DATE			
LET		REVISION		DATE		DRN		CHK		REL		REMOVE ALL BURRS		5-28-92		5-29-92	

