




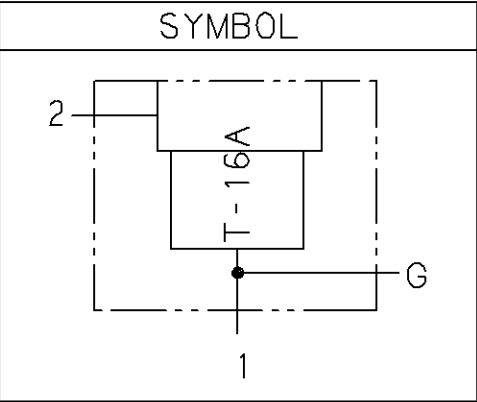


INCH: .375-16UNC x
.88 DP.
METRIC: M10 x 1.5-6H
x .88 DP.
TYP (4) PLACES

T-16A CAVITY
.06 L.S. DEPTH

- NOTES:
- 1) ALUMINUM BODIES-3000 PSI
MAXIMUM CONTINUOUS SERVICE
PRESSURE.
 - 2) FOR OTHER OPTIONS SEE OPTION
SHEET.


REVISION	PART NO.		
B	WHB		
MODEL NO.	BODY DASH NO.	TH'D TYPE	GAGE PORT
WHB	001	INCH	1/4 NPTF
WHB/M	002	METRIC	1/4 BSPP

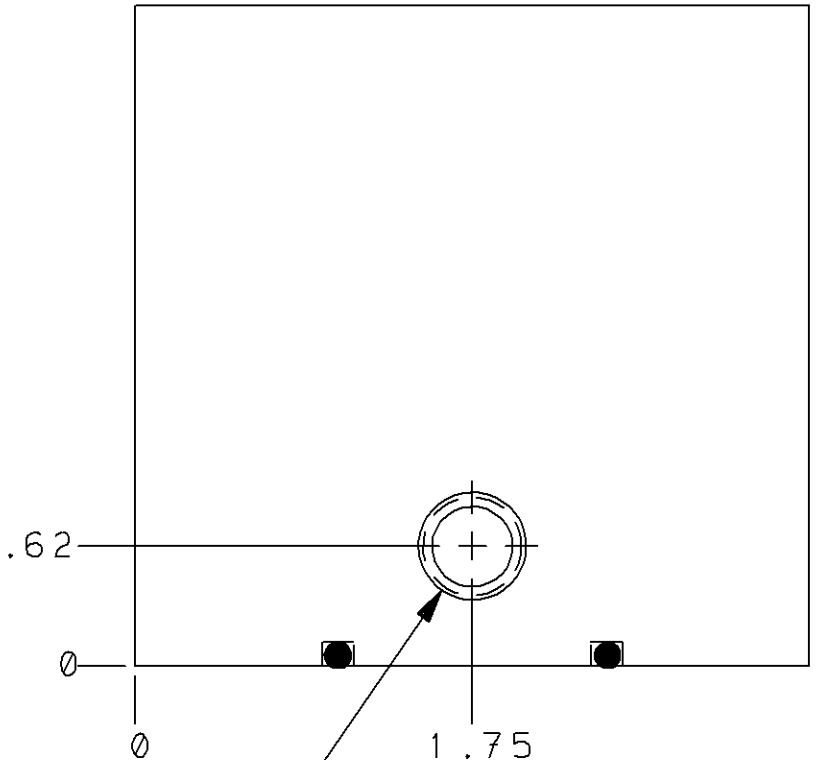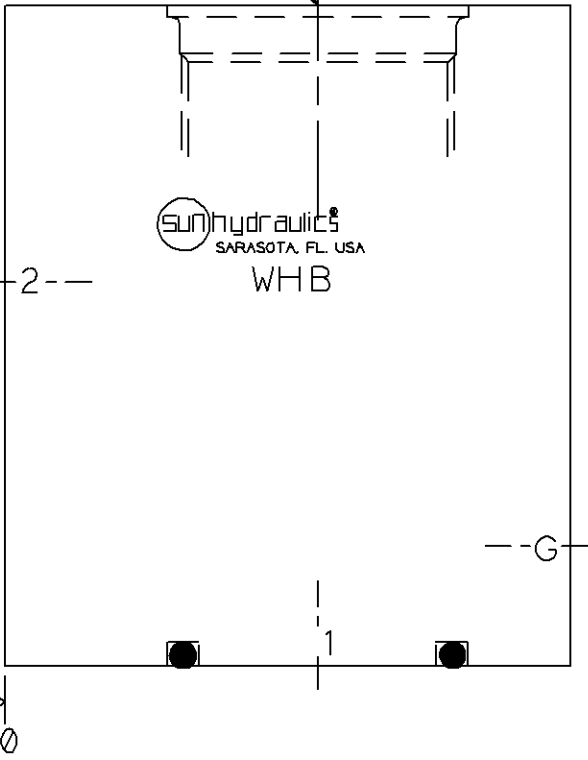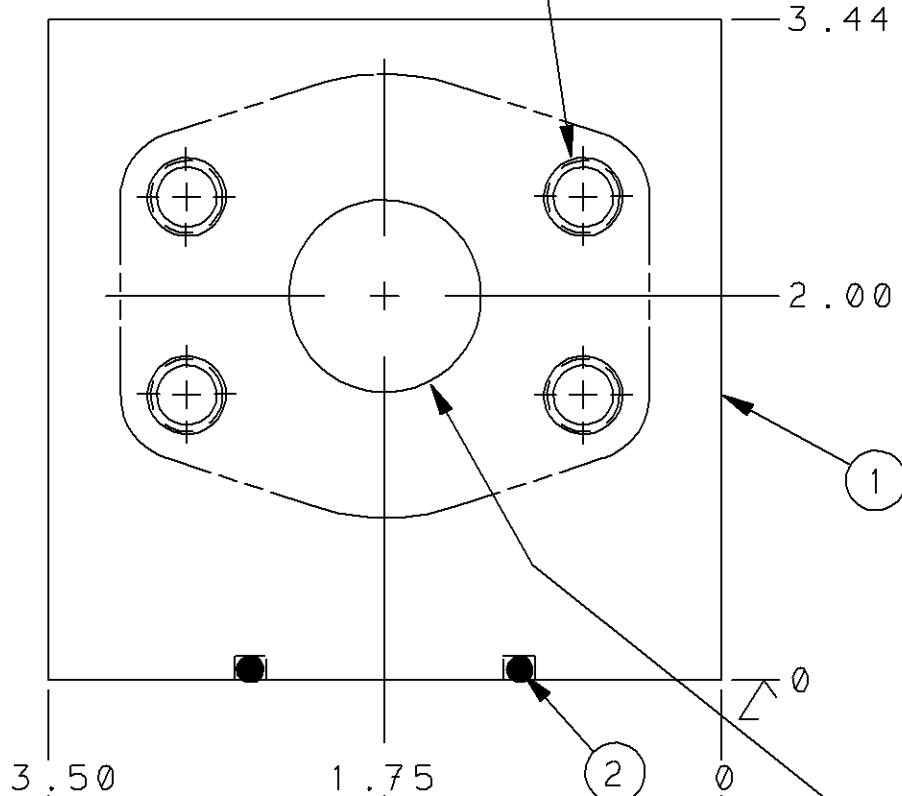

1.00 SAE CODE-61
4-BOLT FLANGE
PATTERN (2) PLACES

PORT G
PER CHART

INCH: .406 DIA THRU
METRIC: .422 DIA THRU
TYP (4) PLACES

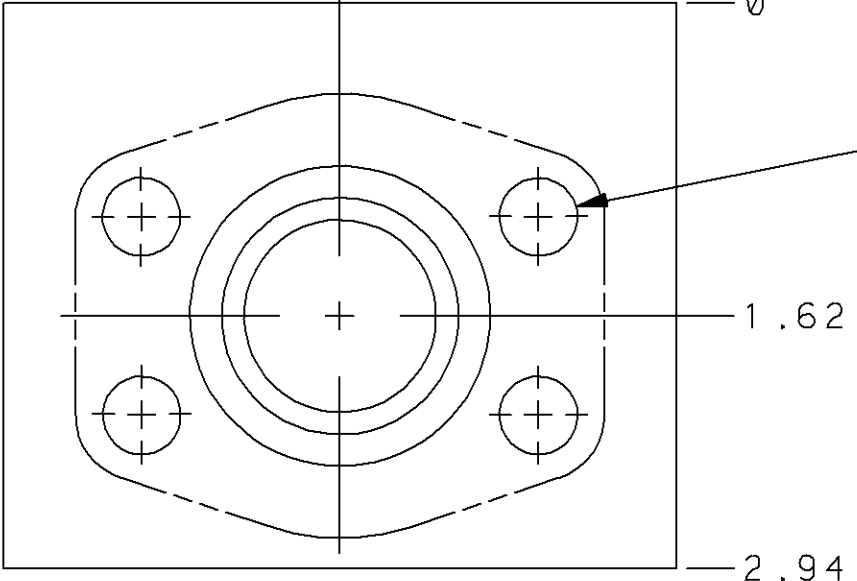

2	500-001-219	O RING	1
1	152-670-SEE TABLE	BODY	1
ITEM	PART NO.	PART NAME	QTY

OUTLINE DRAWING						REVISION	PART NO.
TITLE IN LINE BODY T-16A CAV. 1.00 SAE CODE-61 FLANGE						B	WHB
UNLESS OTHERWISE SPECIFIED			SCALE REF.			MATERIAL	
DIMENSION TOL			1 / 1			ALUMINUM BODY	
.x = ±.030			DRAWN			HEAT TREAT & FINISH	
.xx = ±.015			CHECK				
.xxx = ±.005			RELEASE				
ANGLE TOL ± 1/2			DATE				
FINISH 80✓			DATE				
REMOVE ALL BURRS			DATE				
B	ADD O RING #2	13 JUN01	DEB	18556			
A	T16A CAVITY L.S. WAS .03	11/22/91	DEA	3390			
LET	REVISION	DATE	DRN	CHK	REL		

