
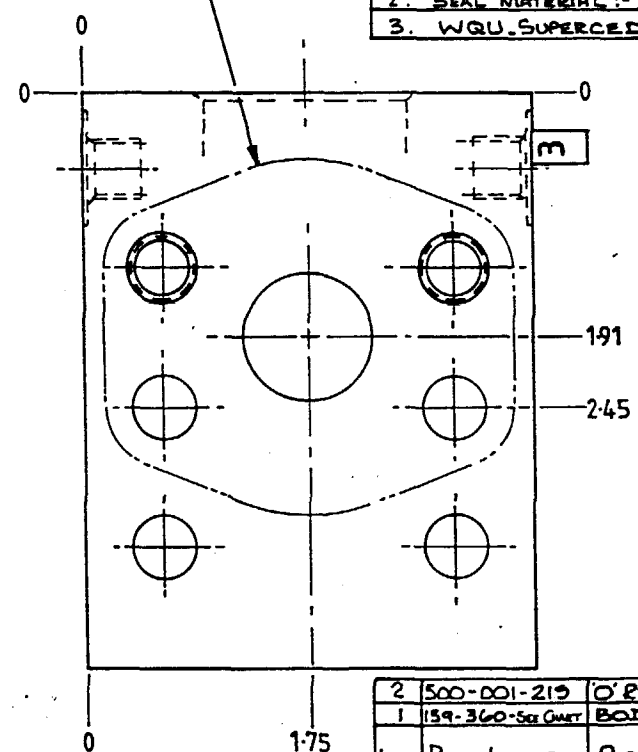
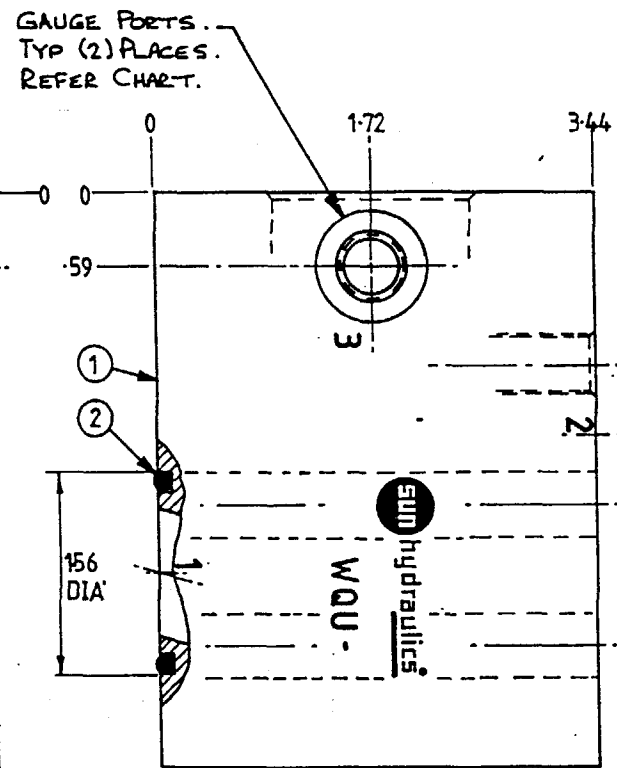


1.00 SAE CODE 62- 4 BOLT FLANGE PATTERN
 MOUNTING PROVISIONS :-
 INCH :- .438-14 UNC x 1.06 DEEP TAPPED HOLES,
 TYP (2) PLACES.
 .469 DIA' HOLES THRO'. TYP (4) PLACES.
 METRIC :- M12 x 1.75-6H x 1.06 DEEP TAPPED HOLES,
 TYP (2) PLACES.
 .500 DIA' HOLES THRO' - TYP (4) PLACES.

MODEL N°	BODY DASH N°	FLANGE MTGS.	GAUGE PORTS SIZE & TYPE
WQU	001	INCH	SUN STD SAE-6.
WQU/M	002	METRIC	SUN STD .25-19 BSP.P.

FOR OTHER OPTIONS SEE
 OPTIONS SHEET.

- NOTES:-
1. ALUMINIUM BODIES - 3000 P.S.I. MAXIMUM CONTINUOUS SERVICE PRESSURE
 2. SEAL MATERIAL :- Buna-N
 3. WQU SUPERCEDES ZN4

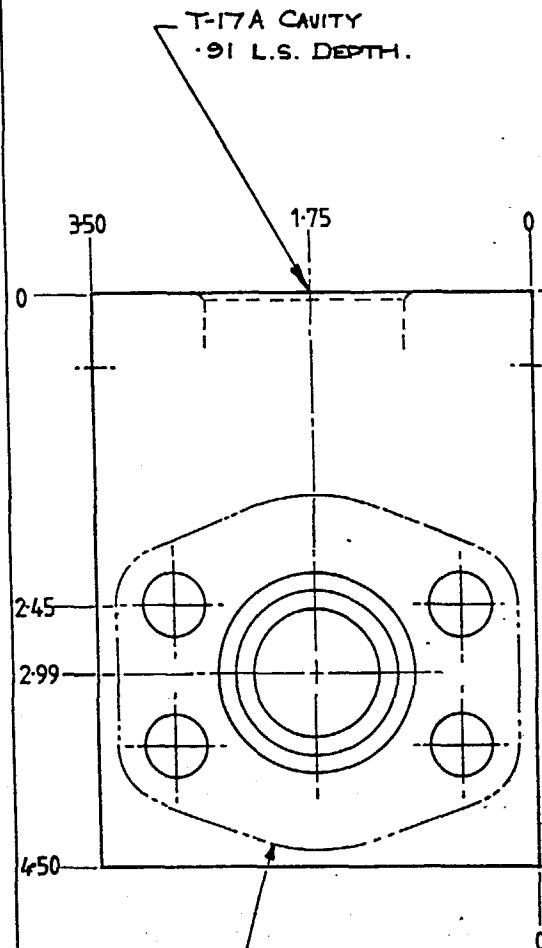

1.00 CODE 62- 4 BOLT SAE FLANGE PATTERN.
 FOR MOUNTING PROVISION DETAILS REFER TO
 OPPOSITE FACE.
 NOTE:- 2 OFF THRO' HOLES ARE COMMON TO
 BOTH SAE FLANGE PATTERNS.

2	500-001-219	O'RING	1
1	139-360-SEE QWRT	BODY	1
ITEM	PART NUMBER	PART NAME	QTY

OUTLINE & ASSY.
 TITLE BODY - WITH 1.00 CODE 62
 SAE FLANGE PORTING

LET	REVISION	DATE	DRN	CHK	REL
A	OUTLINE REDRAWN SHOWING 2 VARIATIONS ON 1 SHT NOT 2 SHTS	1-8-89	CD		2-8-89

UNLESS OTHERWISE SPECIFIED		TITLE		REVISION		PART NO.	
DIMENSION TOL.		SCALE		MATERIAL		HEAT TREAT & FINISH	
X = .030		1:1		ALUMINIUM.			
XX = .015		CHECK DB.					
XXX = .005		DATE		DATE		DATE	
ANGLE TOL. ± 1°		1-8-89		27.2.90			
FINISH 125/							
REMOVE ALL BURRS							

SUN hydraulics