



NOTES:

1) ALUMINUM BODIES -
3000 PSI MAX.
CONTINUOUS SERVICE
PRESSURE.


T-24A CAVITY
2.00 L.S. DEPTH
TYP (2) PLACES

2.00 SAE CODE-62
4 BOLT FLANGE
PATTERN (4) PLACES
INCH: .750-10UNC x
1.50 DP.
METRIC: M20 x 2.5-6H
x 1.50 DP.
TYP (16) PLACES

INCH: .375-16UNC x
.62 DP.
METRIC: M10 x 1.5-6
x .62 DP.
TYP (2) PLACES

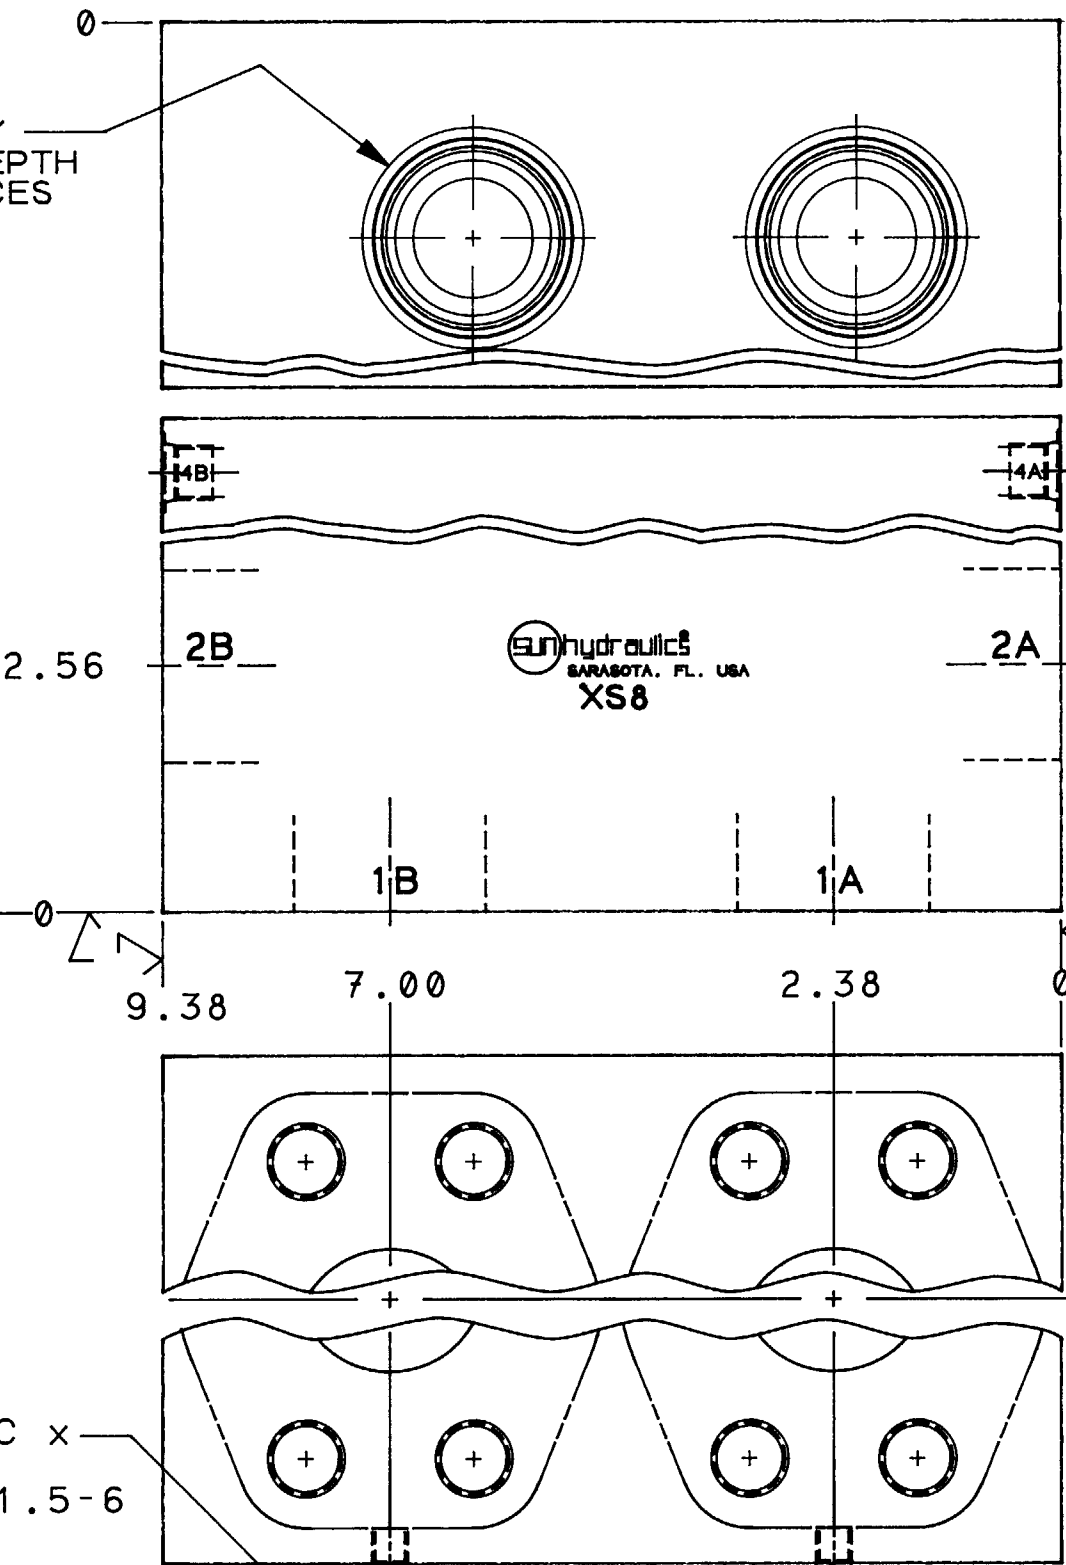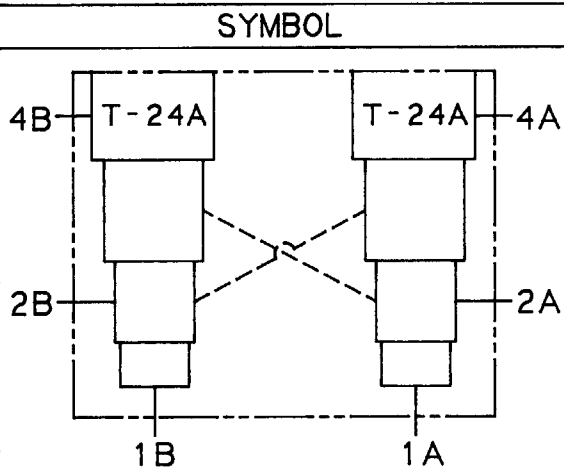

REVISION		PART NO.	
A		XS8	
MODEL NO.	BODY DASH NO.	PORTS 4A & 4B	FLANGE TH'D TYPE
XS8	-001	SAE-6	INCH
XS8/M	-002	.250-19 BSPP	METRIC

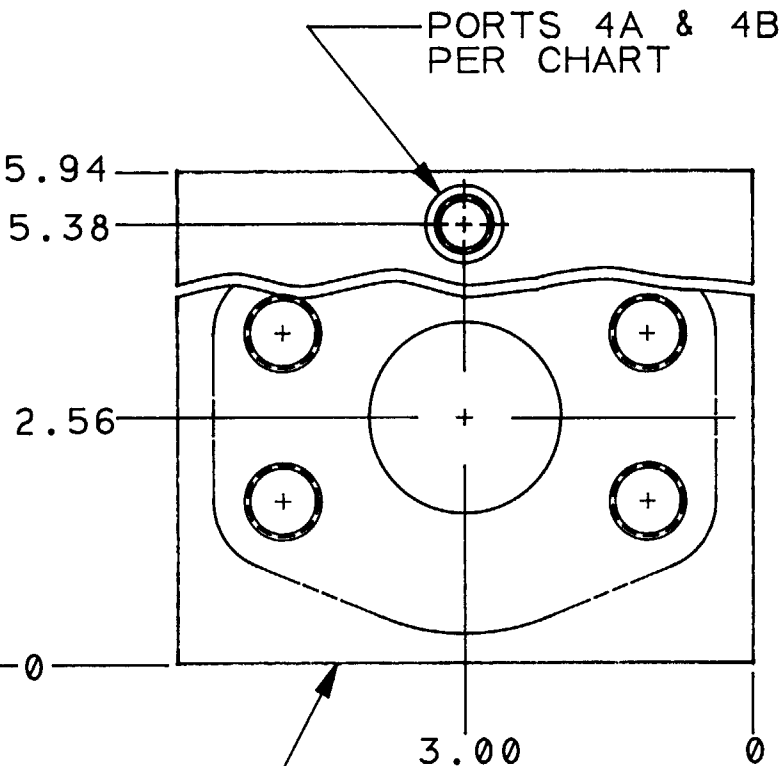

1

REVISION		PART NO.	
A		XS8	
ITEM	PART NO.	PART NAME	QTY
1	152-265-SEE CHRT	BODY	1
OUTLINE			
TITLE DUAL CROSS-PILOTED T-24A CAVITIES W/INDEPENDENT #4 PORTS-2.00 CODE-62			
UNLESS OTHERWISE SPECIFIED		MATERIAL	
DIMENSION TOL		ALUMINUM	
.x = ±.030		HEAT TREAT & FINISH	
.xx = ±.015			
.xxx = ±.005			
ANGLE TOL ±%			
FINISH 80✓			
REMOVE ALL BURRS			
A	DIM. 5.94 WAS 6.00.	4-7-92	BRS
LET	REVISION	DATE	DRN CHK REL
		12/15/89	12/18/89

