



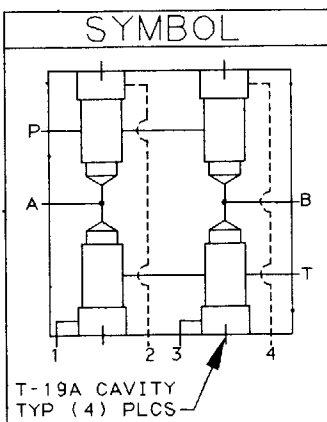

T-19A CAVITY
1.16 L.S. DEPTH
(4) PLACES




PILOT PORTS -
PER CHART
TYP (4) PLCS

1.50 DIA SAE CODE 61
4-BOLT FLANGE PATTERN
TYP (4) PLACES

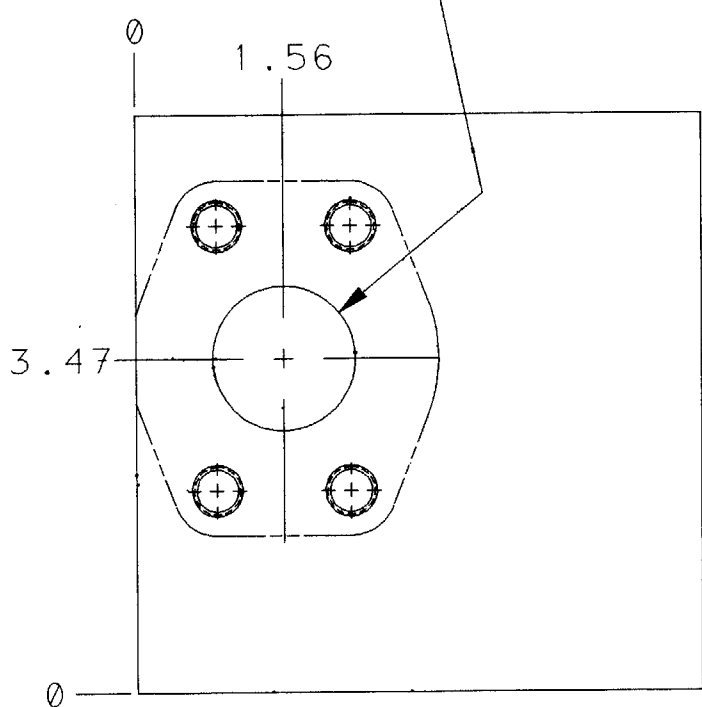

DO NOT STAMP
BELOW THIS LINE

INCH: .500-13UNC x 1.06 DP
METRIC: M12x1.75-6H x 1.06 DP
TYP (16) PLACES

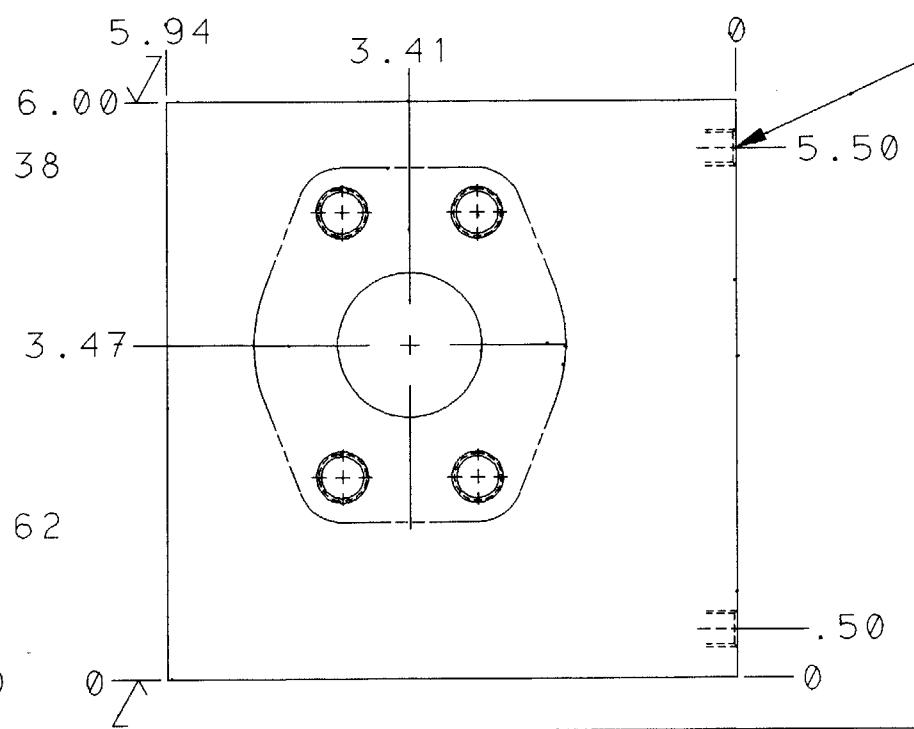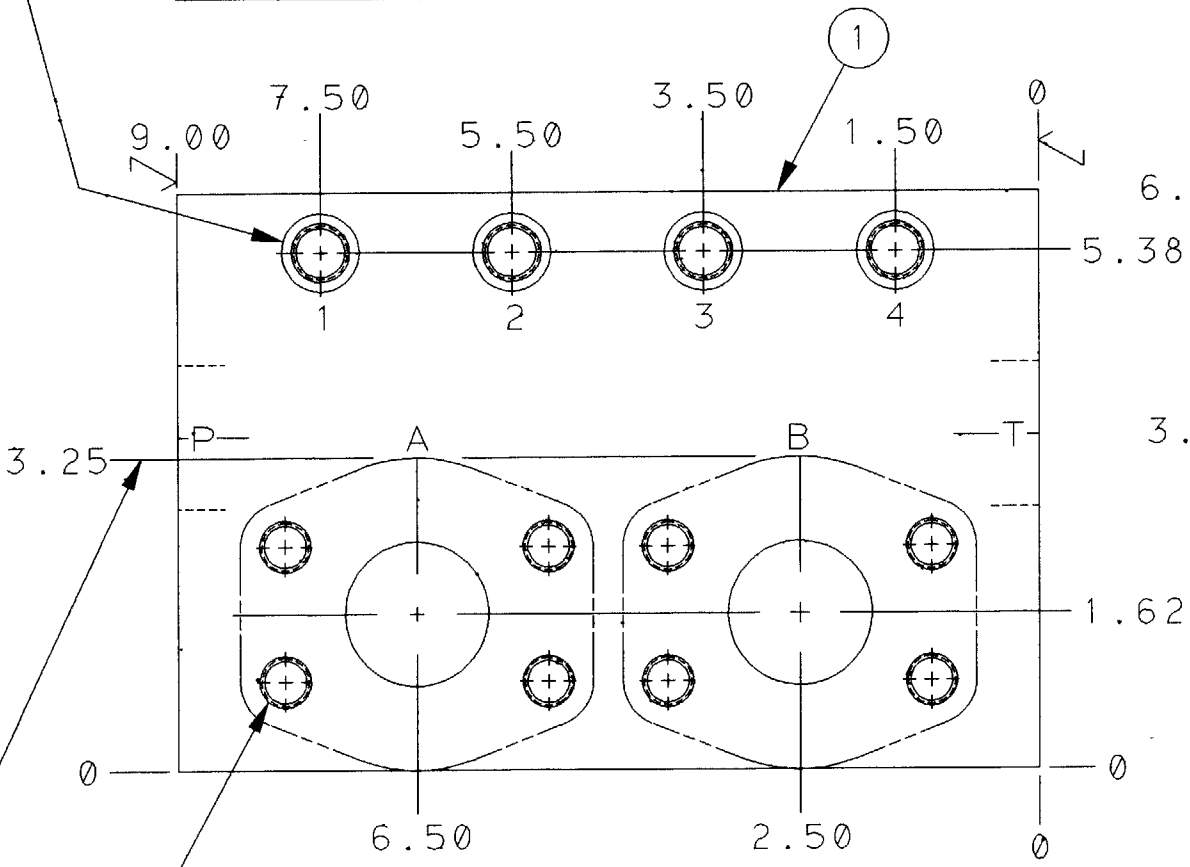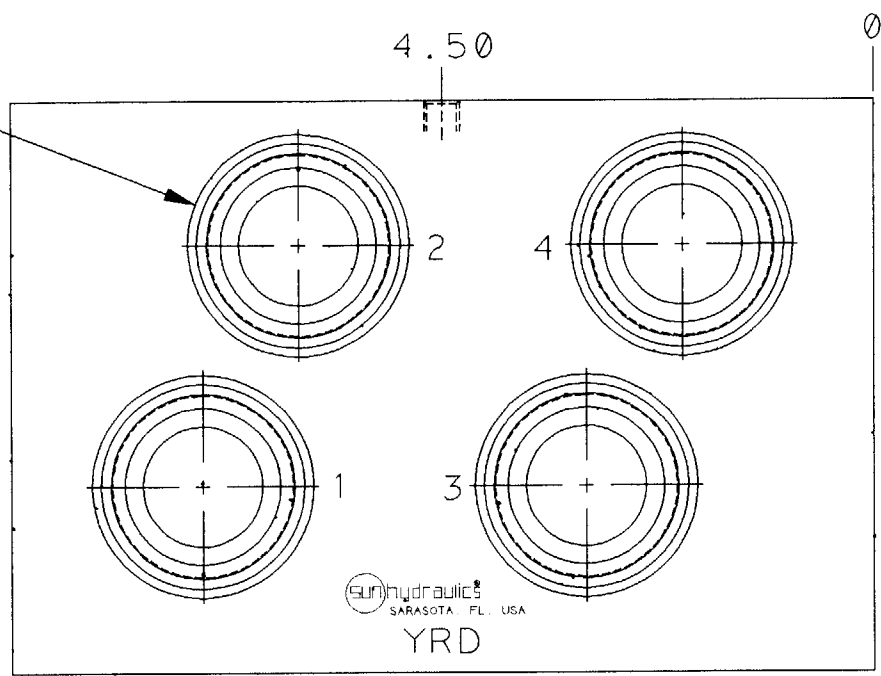

MOUNTING HOLES
INCH: .375-16UNC x .62 DP.
METRIC: M10 x 1.5-6H x
.62 DP. - TYP (2) PLCS

REVISION		PART NO.	
A		YRD	
MODEL No.	BODY DASH No.	THREAD TYPE	PILOT PORTS
YRD	001	INCH	SUN ST'D SAE-6
YRD/M	002	METRIC	1/4 BSPP

1	151-269-***	BODY	1
ITEM	PART NO.	PART NAME	QTY

UNLESS OTHERWISE SPECIFIED				TITLE 4-CAV. 4-WAY DIRECTIONAL VALVE CIRCUIT, T-19A CAV.				REVISION A	PART NO. YRD					
DIMENSION TOL				SCALE 1/2	REF.	MATERIAL ALUMINUM		HEAT TREAT & FINISH						
.x = ±.030				DRAWN DAS	CHECK RJB	DATE 4-29-86								
.xx = ±.015				DATE	DATE	DATE	SUN hydraulics CORPORATION 1500 UNIVERSITY PARKWAY SARASOTA, FLORIDA 34243, USA TELEPHONE (813) 355-2983							
.xxx = ±.005				DATE	DATE	DATE								
ANGLE TOL ± 1/2														
FINISH 80														
REMOVE ALL BURRS														
A	REDRAWN & ADDED METRIC OPTION			3-2-92	DAS	3551								
LET	REVISION			DATE	DRN	CHK	REL							