



CHART A (PORT OPTIONS)				
MODEL NUMBER	PORT G	PORTS 1 & 2	PORT 3	BODY DASH NO ITEM 1
E4A	.250-18 NPTF	.250-18 NPTF	.250-18 NPTF	-001
E4B	.250-18 NPTF	.375-18 NPTF	.375-18 NPTF	-010
E4C	.250-18 NPTF	.500-14 NPTF	.375-18 NPTF	-011
E4I	.250-18 NPTF	SAE-6	SAE-6	-004
E4J	.250-18 NPTF	SAE-8	SAE-8	-012
E4K	.250-18 NPTF	SAE-10	SAE-8	-013
E4T	.250-19 BSPP	.250-19 BSPP	.250-19 BSPP	-007
E4U	.250-19 BSPP	.375-19 BSPP	.375-19 BSPP	-014
E4V	.250-19 BSPP	.500-14 BSPP	.375-19 BSPP	-015

NOTES :

1. SEALS: BUNA-N
2. ALUMINUM BODIES-3000 PSI MAXIMUM CONTINUOUS SERVICE PRESSURE.
3. CXCD XCN CARTRIDGE: CRACKING PRESSURE:30 PSI ±3 CHECK SEAT:STEEL
4. ORDERING INFO: PPDB LAN E4*

MAIN PORT DESIGNATION

CART. TO BE INSTALLED IN T-11A CAVITIES. SEAL TYPE IN PPDB DETERMINES ITEM 2 SEAL TYPE

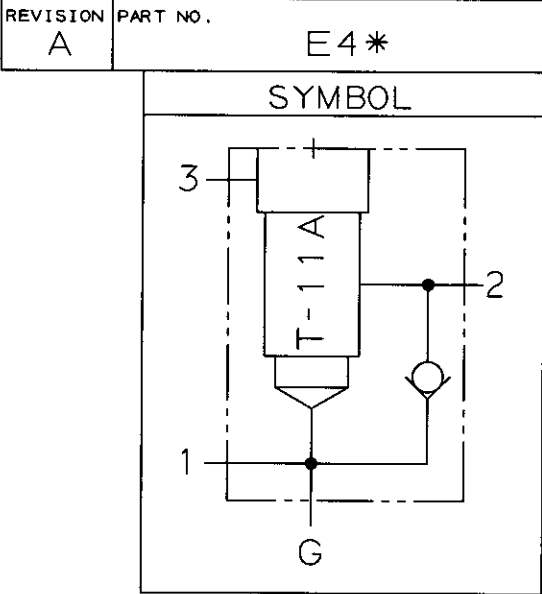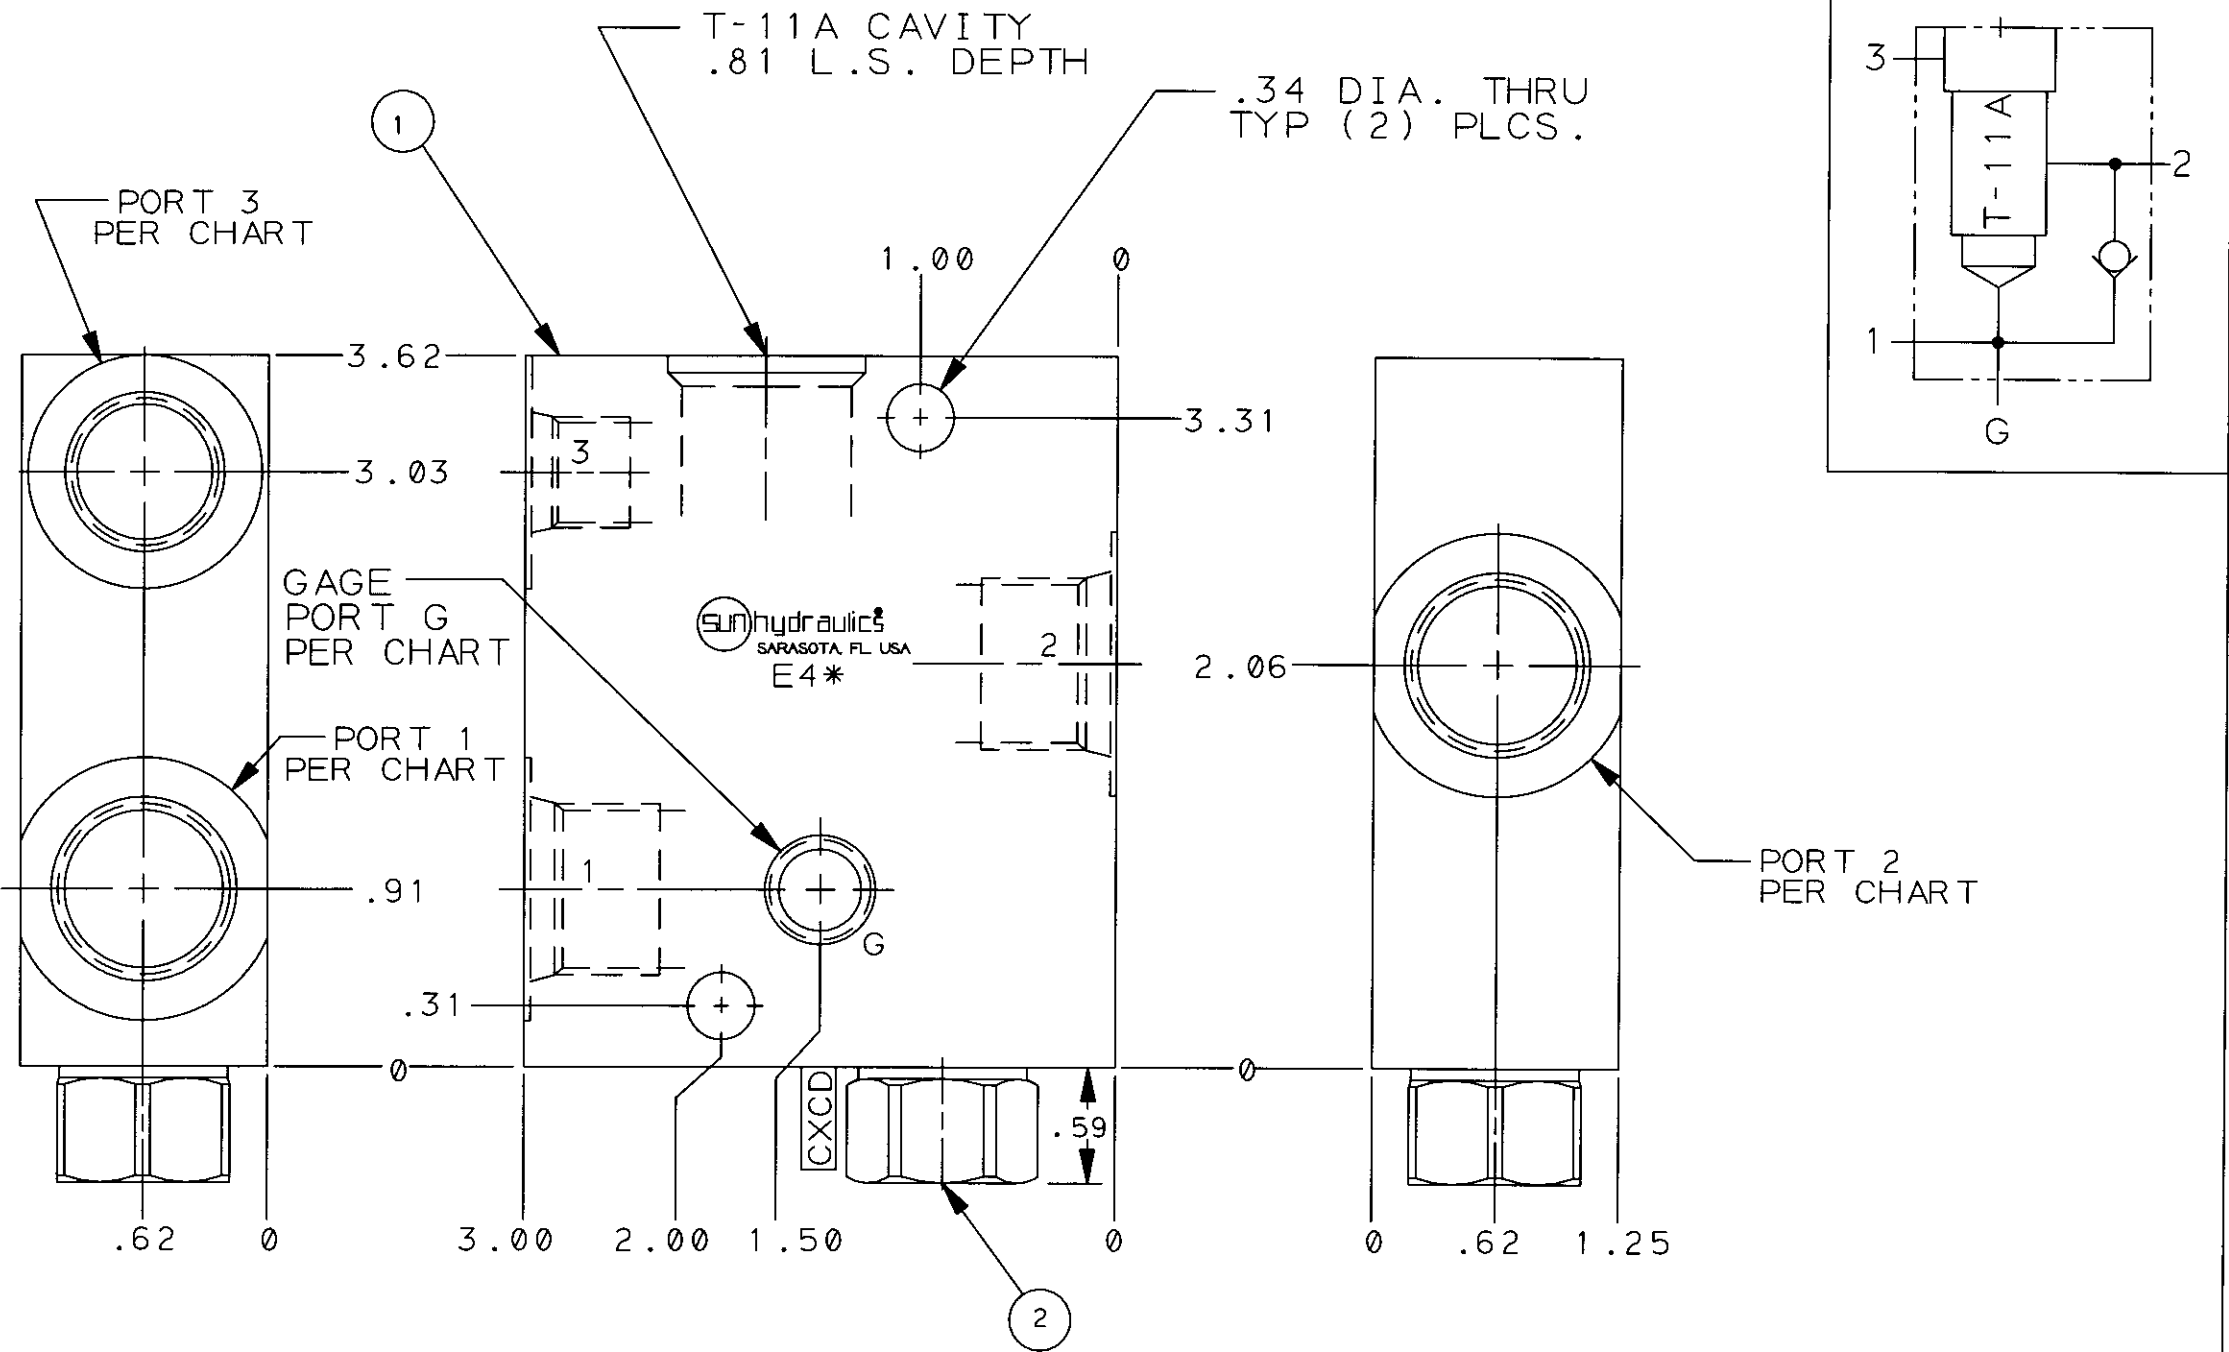

UNLESS OTHERWISE SPECIFIED				
DIMENSION	TOL			
.x	±.030			
.xx	±.015			
.xxx	±.005			
ANGLE	TOL ± 1/2			
FINISH	80V			
REMOVE ALL	BURRS			
A	SAE PORTS WERE SUN STD.	27OCT98	NH	DEB 8887
LET	REVISION	DATE	DRN	CHK REL

OUTLINE & ASSEMBLY

TITLE T-11A CAVITY W/FF CHECK USE W/REDUCER			REVISION A	PART NO. E4*
SCALE 1/1	REF.	MATERIAL ALUM & STEEL		
DRAWN BR5	CHECK R/B	RELEASE 2761		
DATE 8-14-90	DATE 10-3-90	DATE 10-9-90		

2	CXCD XCN	CHECK VALVE	1
1	151-019-SEE TABLE	BODY	1
ITEM	PART NO.	PART NAME	QTY

SUN hydraulics CORPORATION
 781 TALLEVAST ROAD
 SARASOTA, FLORIDA 34243, USA
 TELEPHONE (941) 362-1300